





A-Line Lighting offers high performance, precision crafted lighting solutions. Built right here in Canada, A-Line Lighting can provide designers, engineers and architects, with the expertise and production capabilities; to get the job done right, on time. Speak to your Liteline representative about A-Line Lighting or visit us at: A-Linelighting.com



Liteline manufactures great transformers. We are so confident that your project will run smoothly that we are excited to offer our gold label lifetime warranty on all of our magnetic transformers.

For more details please refer to Terms and Conditions found on page 366.



Our LED products are long lasting, efficient, but most importantly our LED product offering is reliable. For this reason all of our LED's are backed by our 'LED 3-year warranty program'.

For more details please refer to Terms and Conditions found on page 366.



Industry Associations









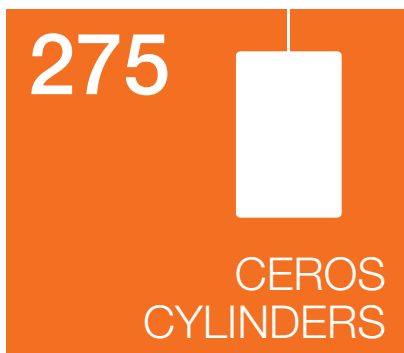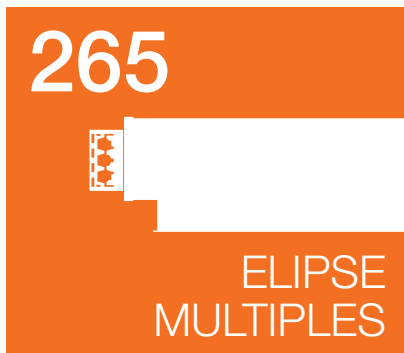











ELECTRO-FEDERATION
C·A·N·A·D·A



Table of Contents



Icon Features

 12V	Low Voltage - 12V	 B	Electronic Ballast	 HOUSING	Compatible Housing
 120V	Line Voltage - 120V	 D	Electronic Driver		Damp Location
 277V	Line Voltage - 277V	 T	Magnetic Transformer		Marine Grade
 347V	Line Voltage - 347V	 T	Electronic Transformer		Linkable
	Ceiling Cut-out – Round	 + DIM -	Dimmable Fixture		Rotation
	Ceiling Cut-out – Square		Airtight		Tilt

Certification and Compliance



Finish and Colour Codes

ABK : Anodized Black	CP : Champagne	MO : Mocha	AL : Albalite Lens
AB : Antique Brass	CG : Champagne Gold	UN : Natural Steel	AS : All-Sanded Lens
AC : Antique Copper	CH : Chrome	OR : Pewter	CL : Clear Lens
AL : Aluminum	CL : Clear	PB : Polished Brass	CT : Frosted Clear Center
AN : Antique Nickel	CUS : Custom	SN : Satin Nickel	CV : Convex Prismatic Lens
BB : Brushed Brass	FWH : Matte White	S/SL : Silver	DR : Drop Opal Lens
BK : Black	G/GD : Gold	STS : Stainless Steel	FC : Frosted Lens
BP : Black Plastic	HC : Haze Clear	WH : White	FR : Fresnel Lens
BN : Brushed Nickel	MA : Matte Platinum	WP : White Plastic	LSL : Linear Spread Lens
CA : Cappuccino	MN : Matte Nickel		SPL : Comfort Linear Lens

RECESSED



Quick Find Index





3" Low Voltage Halogen Housings



3" Halogen Trims




3½" Low Voltage Halogen Housings



4" Low Voltage Halogen Housings




4" Halogen Housing Accessories



4" Incandescent Housings



4" Incandescent Housing Accessories



4" Incandescent Trims

Quick Find Index

4" Incandescent Trims



4" Architectural Vertical Incandescent Housings



4" Architectural Vertical Incandescent Trims



6" Architectural Vertical Incandescent Housings



6" Architectural Vertical Incandescent Trims



8" Architectural Vertical Incandescent Housings



8" Architectural Vertical Incandescent Trims



8" Architectural Vertical Incandescent Trims



10" Architectural Vertical Incandescent Housings



10" Architectural Vertical Incandescent Trims



4" LED Vertical Housings & Trims



6" LED Vertical Housings & Trims



4" Compact Fluorescent Vertical Housings



4" Compact Fluorescent Vertical Trims



Quick Find Index

5" Compact Fluorescent Vertical Housings & Trims




6" Compact Fluorescent Vertical Housings & Trims



6" Compact Fluorescent Vertical Airtight Housings & Trims



6" Compact Fluorescent Horizontal Housings

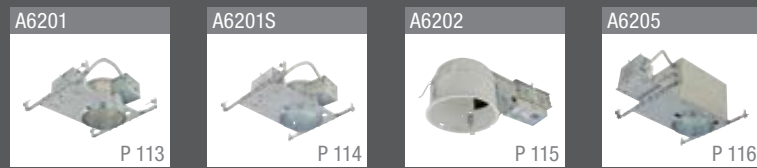

6" Compact Fluorescent Horizontal Trims



4" Architectural Vertical Fluorescent Housings



4" Architectural Vertical Fluorescent Trims



6" Architectural Vertical Fluorescent Housings



6" Architectural Vertical Fluorescent Trims



Quick Find Index

8" Architectural Vertical Fluorescent Housings



8" Architectural Vertical Fluorescent Trims



8" Architectural Vertical Fluorescent Trims



10" Architectural Vertical Fluorescent Housings



10" Architectural Vertical Fluorescent Trims



6" Architectural Horizontal Fluorescent Housings



6" Architectural Horizontal Fluorescent Trims



6" Architectural Horizontal Fluorescent Trims



8" Architectural Horizontal Fluorescent Housings



8" Architectural Horizontal Fluorescent Trims



10" Architectural Horizontal Fluorescent Housings & Trims



7" Super Shallow Horizontal Fluorescent Housings & Trims



Quick Find Index

8" Super Shallow Horizontal Fluorescent Housing & Trims



4" Architectural Vertical Metal Halide Housings



4" Architectural Vertical Metal Halide Trims



6" Architectural Vertical Metal Halide Housings



6" Architectural Vertical Metal Halide Trims



8" Architectural Vertical Metal Halide Housings



8" Architectural Vertical Metal Halide Trims



8" Architectural Vertical Metal Halide Trims



10" Architectural Vertical Metal Halide Housings



10" Architectural Vertical Metal Halide Trims



6" Architectural Horizontal Metal Halide Housings



6" Architectural Horizontal Metal Halide Trims



8" Architectural Horizontal Metal Halide Housings



8" Architectural Horizontal Metal Halide Trims



Quick Find Index

10" Architectural Horizontal Metal Halide Housings



4" Architectural Vertical T4, T6 Metal Halide Housing & Trims



6" Architectural Vertical T4, T6 Metal Halide Housing & Trims



5" Adjustable Wall Wash Housings



5" Adjustable Wall Wash Trims




6" Adjustable Wall Wash Housings



6" Adjustable Wall Wash Trims



6" Adjustable Wall Wash Trims

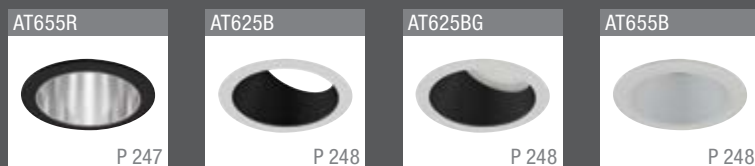

8" Adjustable Wall Wash Housings



8" Adjustable Wall Wash Trims



3" Adjustable Wall Wash Housing & Trims



3½" Adjustable Wall Wash Housing & Trims



4" Adjustable Wall Wash Housing & Trims





The RF302LC is a 3" low voltage recessed remodel housing with an integral magnetic transformer. The RF302LC delivers ultra-high design quality in any application with minimal apertures, ideal for low voltage MR16 designer light source. The RF302LC offers a wide choice of trim types including reflector, gimbal and stepped baffle.



NOT FOR USE IN INSULATED CEILINGS

RF302LC

3" Low Voltage Screw Down "C" Style Remodel Housing

Housing Can

Galvanized steel construction housing. Allows for use in 2" x 6" joist construction. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Mounting Clips

Two pressure screw down clips located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 1" (25mm).

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum four no. 12 AWG 90°C branch-circuit conductors (two in and two out). Eight 1/2" knockouts with true pry-out slots. Ground wire is provided on J-Box.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.

Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)


Optional Accessories

P-3000 new construction mounting plate for use with RF302LC housing.

Trim Options


See pages 20-21

Dimensions

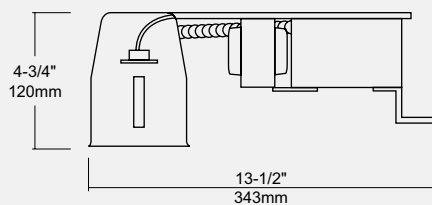

Optional Accessories


P-3000



Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

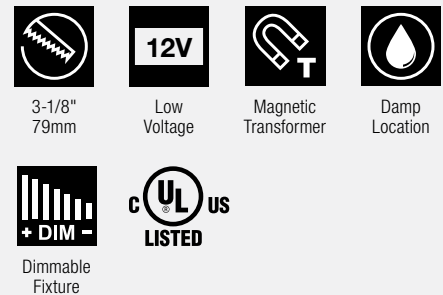

Consult factory for more information on compatible dimmers.



The RF305L is a 3" aperture low voltage housing for use in new construction applications. The RF305L is designed for insulated ceilings and can be in direct contact with ceiling insulation. The RF305L offers a wide choice of trim types including reflector, gimbal and stepped baffle. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



RF305L

3" Low Voltage Airtight New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. A collar gasket is supplied with the housing to reduce airflow into the plenums and ceiling cavities. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts and one 3/4" knockout with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping.

Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.

Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)


Optional Accessories

VBE-1 : Vapor Barrier Extender for use with housings for insulated ceilings.

Trim Options


See pages 20-21

Dimensions

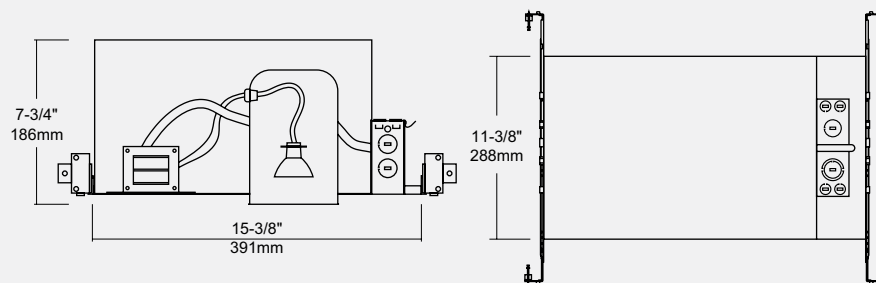

Optional Accessories


VBE-1



Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

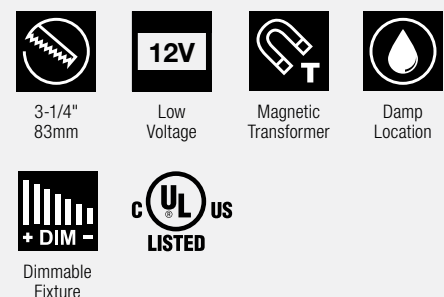

Consult factory for more information on compatible dimmers.



The RF302GC is a 3" aperture line voltage housing with screw down "C" style clips for use in remodeling applications. The RF302GC offers a wide choice of trim types including reflector, gimbal and stepped baffle.

RF302GC

3" Line Voltage Screw Down "C" Style Remodel Housing

Housing Can

Galvanized steel construction housing. Allows for use in 2" x 6" joist construction. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Mounting Clips

Two pressure screw down clips located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 1" (25mm).

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum four no. 12 AWG 90°C branch-circuit conductors (two in and two out). Six 1/2" knockouts with true pry-out slots. Ground wire is provided on J-Box.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Ceramic socket. It accommodates GU10-based MR16 lamps.

Lamping Options

Halogen, MR16 (GU10), 35W
LED, MR16 (GU10)

Optional Accessories


P-3000 new construction mounting plate for use with RF302GC housing.

Trim Options

See pages 20-21


NOT FOR USE IN INSULATED CEILINGS

Dimensions

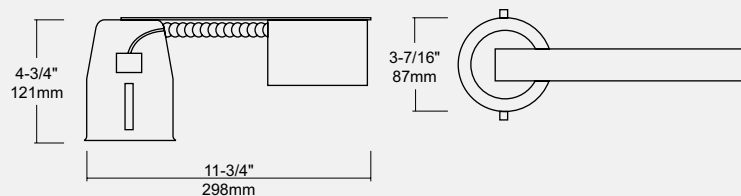

Optional Accessories

P-3000



Compatible Lamps

- Halogen, MR16 (GU10), 35W max.
- LED, MR16 (GU10)

Icon Features



3-1/8"
79mm



Line
Voltage



Damp
Location



C US



The RF305 is a 3" aperture line voltage housing for use in new construction applications. The RF305 is designed for insulated ceilings and can be in direct contact with ceiling insulation. The RF305 offers a wide choice of trim types including reflector, gimbal and stepped baffle. This airtight housing design prevents airflow through ceiling for saving heating and air conditioning costs. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

RF305

3" Line Voltage Airtight New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. A collar gasket is supplied with the housing to reduce airflow into the plenums and ceiling cavities. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for short-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts and one 3/4" knockout with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height

during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Medium base ceramic socket. It accommodates MR16 medium-based lamps.

Lamping Options

Halogen, MR16 E26 120V, 50 watt max.
LED, MR16 E26 LED 120V


Optional Accessories

VBE-1 : Vapor Barrier Extender for use with housings for insulated ceilings.

Trim Options


See pages 20-21

Dimensions

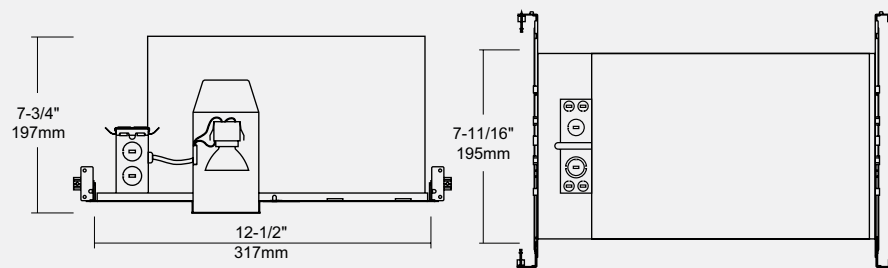

Optional Accessories


VBE-1

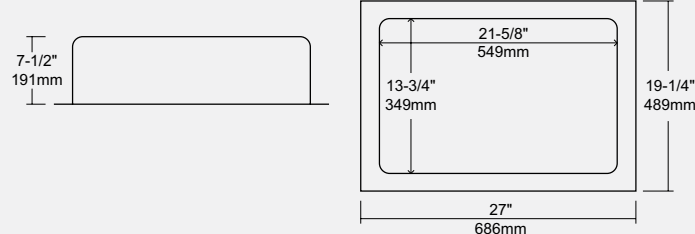

Compatible Lamps

- Halogen, MR16 E26, 50W max.
- LED, MR16 E26

Icon Features





Ordering Guide

HV3-TH01 -
WH : White
BK : Black

HV3-TH01


3" Stepped Baffle with Adjustable Lamp Holder

Die cast constructed trim with 35° adjustable lamp holder.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
 Halogen, MR16 (E26), 50W max.
 Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
 LED, MR16 (E26)
 LED, MR16 (GU10)

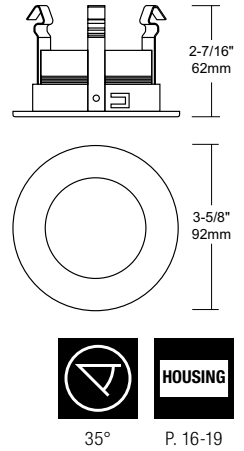

Ordering Guide

HV3-TH02 -
G : Gold
S : Silver

HV3-TH02


3" Reflector with Adjustable Lamp Holder

Die cast constructed trim. Reflector with low iridescent finish eliminates rainbow effect and 35° adjustable lamp holder.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
 Halogen, MR16 (E26), 50W max.
 Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
 LED, MR16 (E26)
 LED, MR16 (GU10)

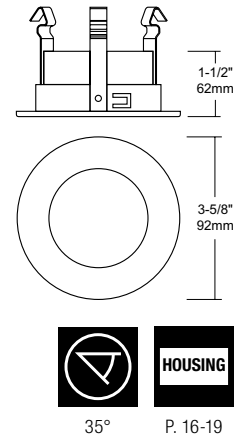

Ordering Guide

HV3-TH18 -
WH : White
BB : Brushed Brass
BN : Brushed Nickel


HV3-TH18

3" Tilting Gimbal Trim

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
 Halogen, MR16 (E26), 50W max.
 Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
 LED, MR16 (E26)
 LED, MR16 (GU10)

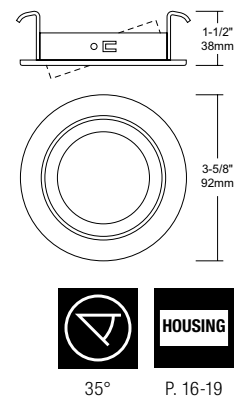

Example: HV3-TH18-WH



RTM3012S


3" Shower Trim with Frosted Lens

Lamping Options

Halogen, MR16 (GU5.3), 35W max.

Halogen, MR16 (E26), 35W max.

Halogen, MR16 (GU10), 35W max.



P. 16-19

Ordering Guide

RTM3012S - Trim Ring
WH : White
BN : Brushed Nickel
CH : Chrome

Example: RTM3012S-CH



Designed for non-insulated ceilings in new construction applications. Shallow housing designed to fit in low ceiling profiles or where space is limited. Housing frame accommodates up to 1-1/4" (32mm) ceiling thickness. Fully dimmable energy-saving 12V magnetic transformer with lifetime warranty. Approved for damp locations. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



NOT FOR USE IN INSULATED CEILINGS

A3001S

3 1/2" Low Voltage NON-IC, Shallow New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity, the frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location. Housing is approved for totally enclosed ceilings.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum four no. 12 AWG 90°C branch-circuit conductors (two in and two out). Seven 1/2" knockouts with true pry-out slots. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer works in dual function to protect the transformer and deactivates fixture if overheating occurs due to improper lamping or insulation.

Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.


Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)

Trim Options

See pages 24-30


Dimensions

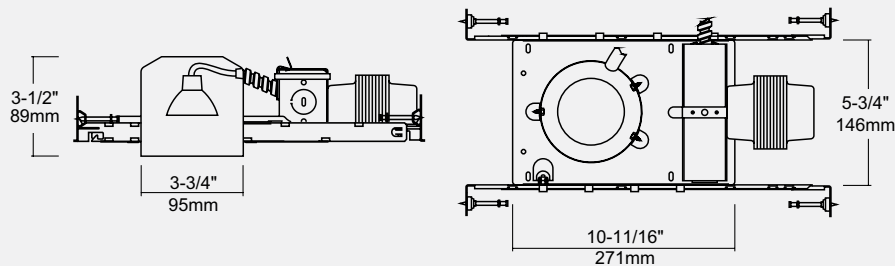

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

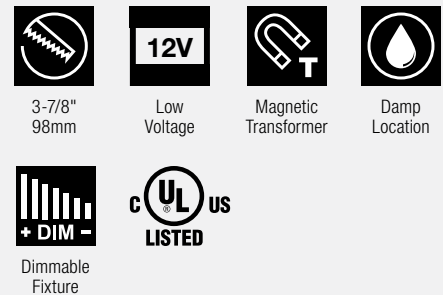

Consult factory for more information on compatible dimmers.



Designed for non-insulated ceilings in remodel applications. Shallow housing designed to fit in low ceiling profiles or where space is limited. Remodel clips accommodates up to 5/8" (16mm) ceiling thickness. Fully dimmable energy saving 12V magnetic transformer with lifetime warranty. Approved for damp locations



NOT FOR USE IN INSULATED CEILINGS

A3002S

3 1/2" Low Voltage NON-IC, Shallow Remodel Housing

Housing

Constructed of 22ga galvanized steel for optimum rigidity. Steel clips provided to allow housing to be quickly mounted and secured. The housing also includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum four no. 12 AWG 90°C branch-circuit conductors (two in and two out). Seven 1/2" knockouts with true pry-out slots and four Romex® clamp connectors. Ground wire is provided on J-Box.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer works in dual function to protect the transformer and deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.


Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)

Trim Options

See pages 24-30


Dimensions

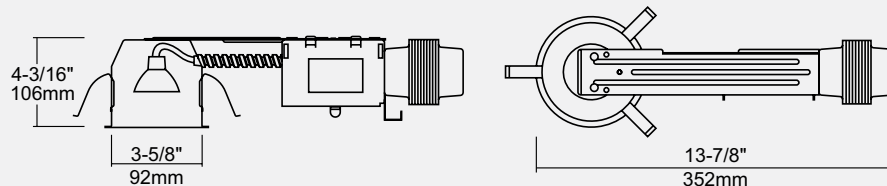

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

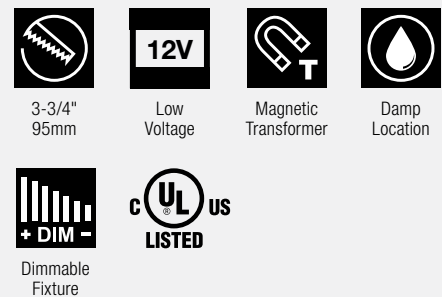

Consult factory for more information on compatible dimmers.



AT324B

3 1/2" Stepped Baffle with Adjustable Lamp Holder

Die cast constructed trim with 35° adjustable lamp holder.


Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

Ordering Guide

Baffle		Metal Trim Ring	
AT324B -		-	
WH : White	MO : Mocha	WH : White	CA : Cappuccino
BK : Black	CA : Cappuccino	BK : Black	CH : Chrome
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	UN : Natural Steel
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	PB : Polished Brass
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	MN : Matte Nickel
		MO : Mocha	

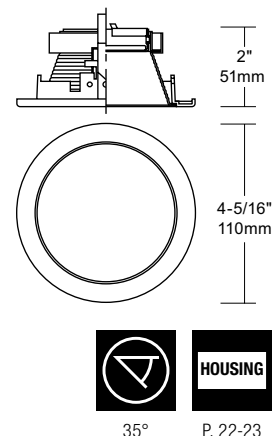

35° P. 22-23



AT324C

3 1/2" Reflector with Adjustable Lamp Holder

Die cast constructed trim. Reflector with low iridescent finish eliminates rainbow effect and 35° adjustable lamp holder.


Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

Ordering Guide

Reflector		Metal Trim Ring	
AT324C -		-	
CL : Clear	WH : White	CA : Cappuccino	
WH : White	BK : Black	CH : Chrome	
GD : Gold	SN : Satin Nickel	UN : Natural Steel	
HC : Haze Clear	AN : Antique Nickel	PB : Polished Brass	
CP : Champagne	AC : Antique Copper	MN : Matte Nickel	
OR : Pewter	MO : Mocha		
MA : Matte Platinum			

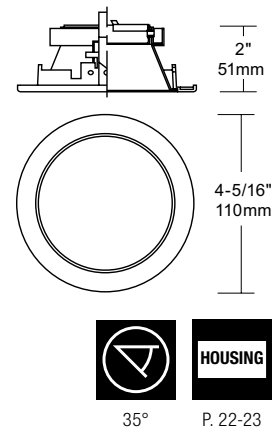

35° P. 22-23



AT315

3 1/2" Dropped Clear Etched Lens

Die cast constructed trim with dropped clear etched lens and 35° adjustable lamp holder.


Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

Ordering Guide

Reflector		Metal Trim Ring	
AT315 -		-	
CL : Clear	WH : White	MO : Mocha	
WH : White	BK : Black	CA : Cappuccino	
GD : Gold	SN : Satin Nickel	CH : Chrome	
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	
CP : Champagne	AC : Antique Copper	PB : Polished Brass	
OR : Pewter			
MA : Matte Platinum			

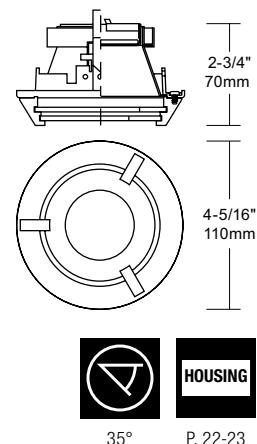

35° P. 22-23

Example: AT315-CL-WH




AT316

3 1/2" Shower Frosted Flat Lens

Die cast constructed trim.

Lamping Options

Xenon (GY6.35)



HOUSING

P. 22-23

Ordering Guide

Reflector	Metal Trim Ring
AT316 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	MO : Mocha
MA : Matte Platinum	




AT317

3 1/2" Shower Frosted Flat Lens

Die cast constructed trim with 35° adjustable lamp holder.

Lamping Options

Halogen, MR16 (GU5.3), 35W max.



35°

HOUSING

P. 22-23

Ordering Guide

Reflector	Metal Trim Ring
AT317 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	MO : Mocha
MA : Matte Platinum	




AT318

3 1/2" Shower Convex Shape Lens

Die cast constructed trim.

Lamping Options

Halogen, MR16 (GU5.3), 35W max.



HOUSING

P. 22-23

Ordering Guide

Reflector	Metal Trim Ring
AT318 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	MO : Mocha
MA : Matte Platinum	

Example: AT318-CL-WH



AT319

3 1/2" Tapered Glass Diffuser


Die cast constructed trim with 35° adjustable lamp holder.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Ordering Guide

AT319 -	Metal Trim Ring
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass



35°

P. 22-23



AT335B

3 1/2" Pin Spot with Baffle


Die cast constructed trim.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Ordering Guide

AT335B -	Baffle	-	Metal Trim Ring
WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass



P. 22-23



AT335C

3 1/2" Pin Spot with Reflector


Die cast constructed trim with low iridescent finish to eliminate rainbow effect.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Ordering Guide

AT335C -	Reflector	-	Metal Trim Ring
CL : Clear	WH : White	MO : Mocha	
WH : White	BK : Black	CA : Cappuccino	
GD : Gold	SN : Satin Nickel	CH : Chrome	
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	
CP : Champagne	AC : Antique Copper	PB : Polished Brass	
OR : Pewter			
MA : Matte Platinum			



P. 22-23

Example: AT335C-CL-WH




AT329

3 1/2" Slotted Wall Wash

Die cast constructed trim with low iridescent finish to eliminate rainbow effect.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)



HOUSING

P. 22-23

Ordering Guide

AT329 -	Reflector	-	Metal Trim Ring
	CL : Clear		WH : White
	WH : White		BK : Black
	GD : Gold		SN : Satin Nickel
	HC : Haze Clear		AN : Antique Nickel
	CP : Champagne		AC : Antique Copper
	OR : Pewter		MO : Mocha
	MA : Matte Platinum		




AT347B

3 1/2" Adjustable Wall Wash with Baffle

Die cast constructed trim.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)



35°

HOUSING

P. 22-23

Ordering Guide

AT347B -	Baffle	-	Metal Trim Ring
	WH : White		WH : White
	BK : Black		BK : Black
	SN : Satin Nickel		SN : Satin Nickel
	AN : Antique Nickel		AN : Antique Nickel
	AC : Antique Copper		AC : Antique Copper
	MO : Mocha		MO : Mocha
	CA : Cappuccino		CA : Cappuccino
	CH : Chrome		CH : Chrome
	UN : Natural Steel		UN : Natural Steel
	PB : Polished Brass		PB : Polished Brass
			MN : Matte Nickel




AT328

3 1/2" Tilting Gimbal with Baffle

Die cast constructed trim with 35° adjustable lamp holder.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)



35°

HOUSING

P. 22-23

Ordering Guide

AT328 -	Baffle	-	Metal Trim Ring
	WH : White		WH : White
	BK : Black		BK : Black
	SN : Satin Nickel		SN : Satin Nickel
	AN : Antique Nickel		AN : Antique Nickel
	AC : Antique Copper		AC : Antique Copper
	MO : Mocha		MO : Mocha
	CA : Cappuccino		CA : Cappuccino
	CH : Chrome		CH : Chrome
	UN : Natural Steel		UN : Natural Steel
	PB : Polished Brass		PB : Polished Brass
			MN : Matte Nickel

Example: AT328-WH-WH



AT3X18R

3 1/2" Tilting Gimbal

Stamped steel construction.


Lamping Options

Halogen, MR16 (GU5.3), 50W max.

Halogen, MR16 (E26), 50W max.

Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)




35°

P. 22-23

Ordering Guide

AT3X18R - **Metal Trim Ring**

WH : White	CA : Cappuccino
BK : Black	CH : Chrome
SN : Satin Nickel	UN : Natural Steel
AN : Antique Nickel	PB : Polished Brass
AC : Antique Copper	MN : Matte Nickel
MO : Mocha	

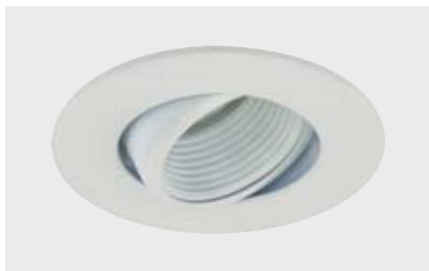

AT3X01B

3 1/2" Rear Load Directional Baffle


Lamping Options

Halogen, MR16 (GU5.3), 50W max.

Halogen, MR16 (E26), 50W max.

Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)



30°

P. 22-23

Ordering Guide

AT3X01B - **Baffle** - **Trim Ring**

WH : White	CA : Cappuccino	WH : White	CA : Cappuccino
BK : Black	CH : Chrome	BK : Black	CH : Chrome
SN : Satin Nickel	UN : Natural Steel	SN : Satin Nickel	UN : Natural Steel
AN : Antique Nickel	PB : Polished Brass	AN : Antique Nickel	PB : Polished Brass
AC : Antique Copper	MN : Matte Nickel	AC : Antique Copper	MN : Matte Nickel
MO : Mocha		MO : Mocha	




AT3XA02

3 1/2" Aluminum Reflector and Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 50W max.

LED, MR16 (GU5.3)



Marine
Grade

P. 22-23

Ordering Guide

AT3XA02 - **Reflector** - **Trim Ring**

CL : Clear	AL : Aluminum
FWH : Matte White	FWH : Matte White
ABK : Anodized Black	

Example: AT3XA02-FWH-FWH



AT3XA02S


3 1/2" Aluminum Reflector and Square Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Ordering Guide

	Reflector	Trim Ring
AT3XA02S -	<input type="text"/>	<input type="text"/>
	CL : Clear	AL : Aluminum
	FWH : Matte White	FWH : Matte White
	ABK : Anodized Black	



Marine
Grade



P. 22-23



AT3XA18


3 1/2" Aluminum Gimbal and Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Ordering Guide

	Gimbal	Trim Ring
AT3XA18 -	<input type="text"/>	<input type="text"/>
	CL : Clear	AL : Aluminum
	FWH : Matte White	FWH : Matte White
	ABK : Anodized Black	



Marine
Grade



35°



P. 22-23



AT3XA18S


3 1/2" Aluminum Gimbal and Square Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
LED, MR16 (GU5.3)

Ordering Guide

	Gimbal	Trim Ring
AT3XA18S -	<input type="text"/>	<input type="text"/>
	CL : Clear	AL : Aluminum
	FWH : Matte White	FWH : Matte White
	ABK : Anodized Black	



Marine
Grade



35°



P. 22-23

Example: AT3XA18S-CL-AL



AT352


3 1/2" Aluminum Reflector and Die Cast Aluminum Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 50W max.

Halogen, MR16 (E26), 50W max.

LED, MR16 (GU5.3)



Ordering Guide

Reflector	Trim Ring
AT352 - <input type="text"/>	<input type="text"/>
ABK : Anodized Black	FWH : Matte White
FWH : Matte White	BN : Brushed Nickel
BN : Brushed Nickel	CH : Chrome
HC : Haze Clear	AL : Aluminum
CH : Chrome	



Marine
Grade



P. 22-23



AT352S


3 1/2" Reflector with Square Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 50W max.

Halogen, MR16 (E26), 50W max.

LED, MR16 (GU5.3)



Ordering Guide

Reflector	Trim Ring
AT352S - <input type="text"/>	<input type="text"/>
ABK : Anodized Black	BK : Black
FWH : Matte White	FWH : Matte White
BN : Brushed Nickel	BN : Brushed Nickel
HC : Haze Clear	
CH : Chrome	



Marine
Grade



P. 22-23




RTM3X15S

3 1/2" Square Shower Trim with Frosted Lens

Lamping Options

Halogen, MR16 (GU5.3), 35W max.

Halogen, MR16 (E26), 35W max.



Ordering Guide

Trim Ring
RTM3X15S - <input type="text"/>
FWH : Matte White
STS : Stainless Steel
WH : White



Damp
Location



P. 22-23

Example: RTM3X15S-WH



A4001S

4" Low Voltage NON-IC, Shallow New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. The housing also includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location. Housing is approved for totally enclosed ceilings.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum six no. 12 AWG 90°C branch-circuit conductors (three in and three out). Seven 1/2" knockouts with true pry-out slots. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer works in dual function to protect the transformer and deactivates fixture if overheating occurs due to improper lamping or insulation.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.

Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)

Trim Options


See pages 38-46

Designed for non-insulated ceilings in new construction applications. Shallow housing designed to fit in low ceiling profiles or where space is limited. Housing frame accommodates up to 1-1/4" (32mm) ceiling thickness. Fully dimmable energy-saving 12V magnetic transformer with lifetime warranty. Approved for damp locations. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



NOT FOR USE IN INSULATED CEILINGS


Dimensions

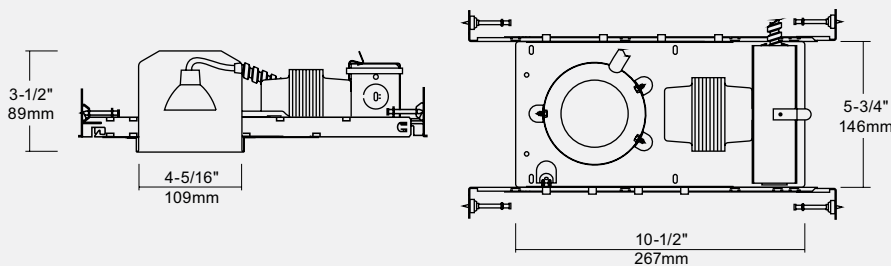

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

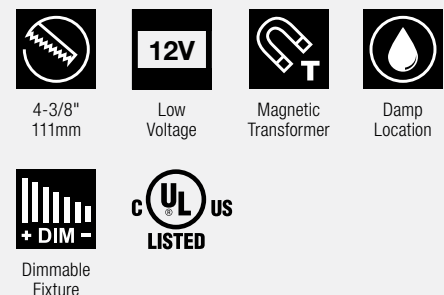

Consult factory for more information on compatible dimmers.



Designed for non-insulated ceilings in remodel applications. Shallow housing designed to fit in low ceiling profiles or where space is limited. Remodel clips accommodates up to 5/8" (16mm) ceiling thickness. Fully dimmable energy-saving 12V magnetic transformer with lifetime warranty. Approved for damp locations.



NOT FOR USE IN INSULATED CEILINGS

A4002S

4" Low Voltage NON-IC, Shallow Remodel Housing

Housing

Constructed of 22ga galvanized steel for optimum rigidity. Steel clips provided to allow housing to be quickly mounted and secured. The housing also includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Seven 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer works in dual function to protect the transformer and deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.


Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)

Trim Options

See pages 38-46

Dimensions

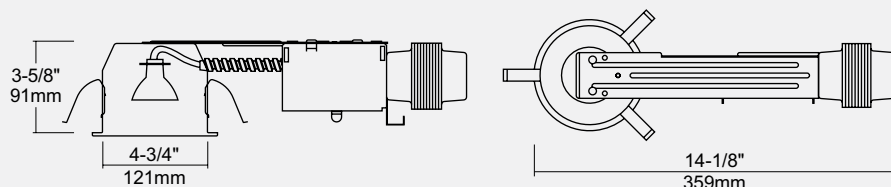

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features



4-3/8"
111mm



Low
Voltage



Magnetic
Transformer



Damp
Location



Dimmable
Fixture



UL
LISTED

Consult factory for more information on compatible dimmers.



The RF401L is a 4" aperture low voltage housing for use in new construction applications. The RF401L offers a wide choice of trim types including reflector, wall wash and retractable trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



NOT FOR USE IN INSULATED CEILINGS

RF401L

4" Low Voltage New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. The housing also includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location.

Junction Box

Pre-wired three quick connectors included for easy tool-less wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts and one 3/4" with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.


Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)

Trim Options

See pages 38-46


Dimensions

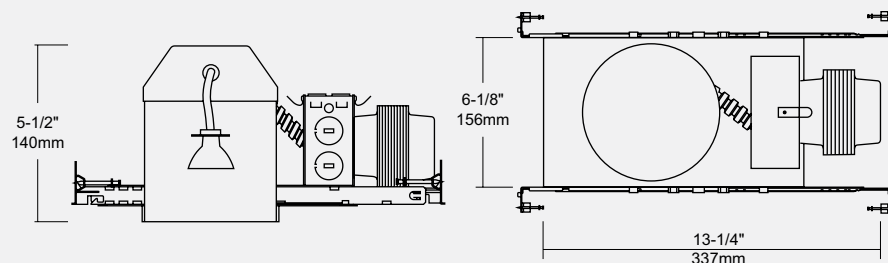

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

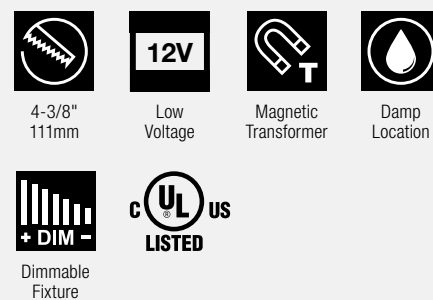

Consult factory for more information on compatible dimmers.



The RF401L-75 is a 4" aperture low voltage housing for use in new construction applications. The RF401L-75 is designed for use in non-insulated areas and offers a wide choice of trim types including reflector, wall wash and retractable trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



NOT FOR USE IN INSULATED CEILINGS

RF401L-75

4" Low Voltage New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. The housing also includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location. Housing is approved for totally enclosed ceilings.

Junction Box

Pre-wired three quick connectors included for easy tool-less wiring. Listed for through branch circuit conductions (four in and four out). 12 AWG 90°C branch-circuit conductions (four in and four out). Five 1/2" knockouts and one 3/4" with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides

easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 75W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.


Lamping Options

Halogen, MR16 (GU5.3), 75W
LED, MR16 (GU5.3)

Trim Options

See pages 38-46


Dimensions

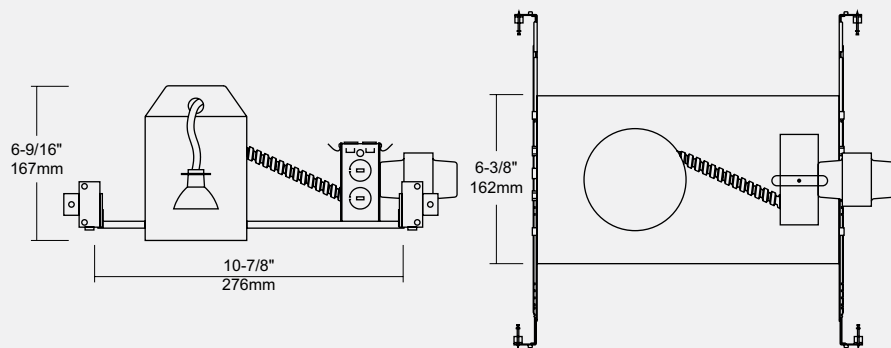

Compatible Lamps

- Halogen, MR16 (GU5.3), 75W max.
- LED, MR16 (GU5.3)

Icon Features

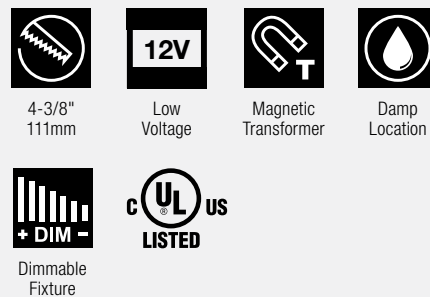

Consult factory for more information on compatible dimmers.



The RF402LC is a 4" aperture low voltage housing with screw down "C" style clips for use in remodel applications. The RF402LC is designed for use in non-insulated areas and offers a wide choice of trim types including reflector, wall wash and retractable trims.



NOT FOR USE IN INSULATED CEILINGS

RF402LC

4" Low Voltage "C" Style Remodel Housing

Housing Can

Galvanized steel construction housing. A height of 4-3/4" (121mm) allows for use in 2" x 6" joist construction.

Mounting Clips

Two pressure screw down clips located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 1" (25mm).

Junction Box

Pre-wired three quick connectors included for easy tool-less wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Eight 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.

Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)


Optional Accessories

P-4000 / P-4010 new construction mounting plate for use with RF402LC housing.

Trim Options


See pages 38-46

Dimensions

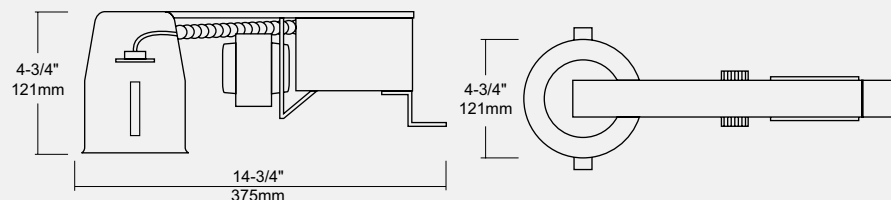

Optional Accessories


P-4000 / P-4010

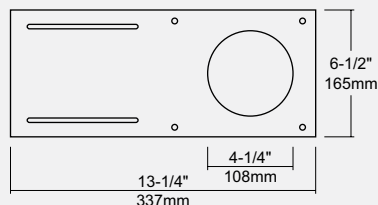

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

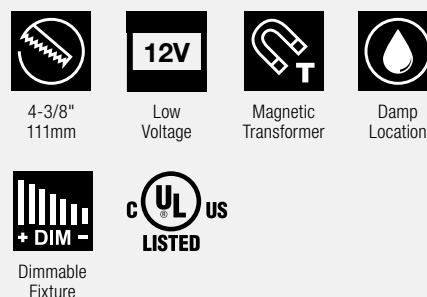

Consult factory for more information on compatible dimmers.



The RF402L-75 is a 4" aperture low voltage housing for use in remodel applications. The RF402L-75 is designed for use in non-insulated areas and offers a wide choice of trim types including reflector, wall wash and retractable trims.



NOT FOR USE IN INSULATED CEILINGS

RF402L-75

4" Low Voltage Remodel Housing

Housing Can

Steel construction housing. A height of 6-3/8" (162mm) allows for use in 2" x 8" joist construction.

Mounting Clips

Four pressure clips with a pressure locking mechanism located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 5/8" (16mm).

Junction Box

Pre-wired three quick connectors included for easy tool-less wiring. Listed for through branch circuit wiring. Maximum six no. 12 AWG 90°C branch-circuit conductors (three in and three out). Seven 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 75W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Self-resetting thermal protector in transformer deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.


Lamping Options

Halogen, MR16 (GU5.3), 75W
LED, MR16 (GU5.3)

Trim Options

See pages 38-46

Dimensions

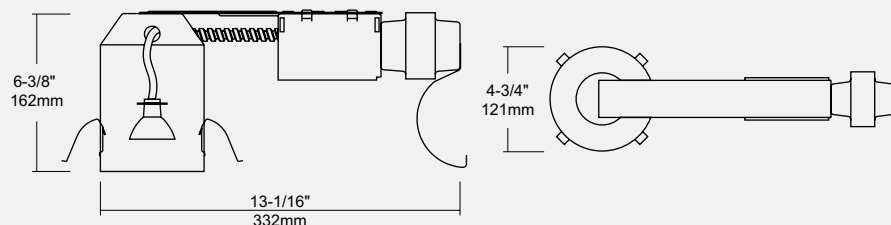

Compatible Lamps

- Halogen, MR16 (GU5.3), 75W max.
- LED, MR16 (GU5.3)

Icon Features



4-3/8"
111mm



Low
Voltage



Magnetic
Transformer



Damp
Location



Dimmable
Fixture



Consult factory for more information on compatible dimmers.



The RF405L is a 4" aperture low voltage housing for use in new construction applications. The RF405L is designed for insulated ceilings and can be in direct contact with ceiling insulation. It also offers a wide choice of trim types including reflector, wall wash and retractable trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



NOT FOR USE IN INSULATED CEILINGS

RF405L

4" Low Voltage New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of double wall aluminum for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. The housing also includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location. Housing is approved for totally enclosed ceilings.

Junction Box

Pre-wired three quick connectors included for easy tool-less wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts and one 3/4" with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Transformer

Magnetic transformer steps (120V input) line voltage to 12V for lamps up to 50W. For dimming purpose, use dimmers rated for magnetic low-voltage transformers. Transformer is provided with a lifetime warranty.

System Protection

Dual self-resetting thermal protector inside transformer and IC box deactivates fixture if overheating occurs due to improper lamping, also prevents transformer from overheating.

Socket Cup/Socket

Ceramic bi-pin socket accommodates GU5.3 base MR16 12V lamps.

Lamping Options

Halogen, MR16 (GU5.3), 50W
LED, MR16 (GU5.3)


Optional Accessories

VBE-1 : Vapor Barrier Extender for use with housings for insulated ceilings.

Trim Options


See pages 38-46

Dimensions

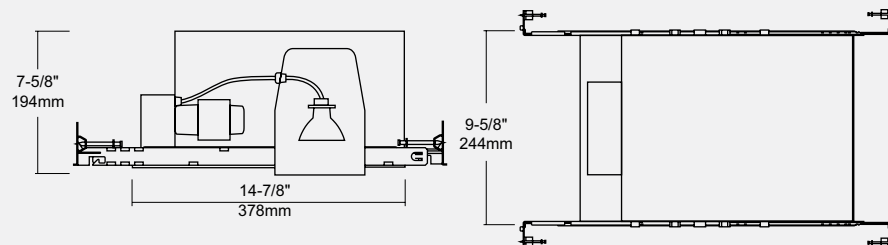

Optional Accessories


VBE-1

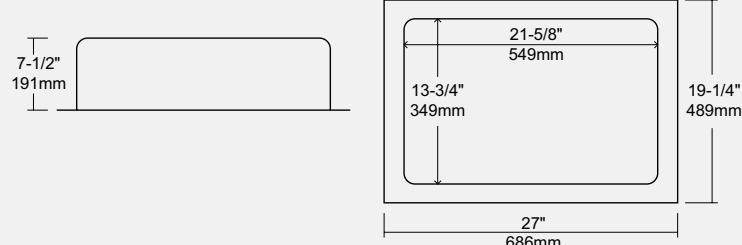


Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- LED, MR16 (GU5.3)

Icon Features

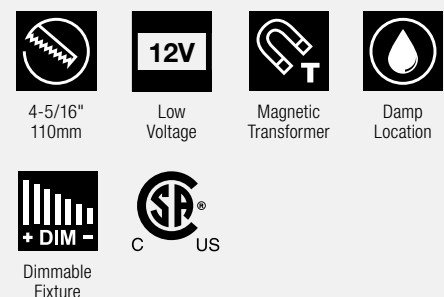

Consult factory for more information on compatible dimmers.

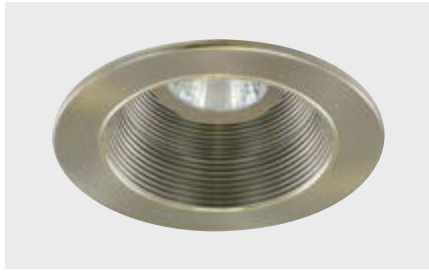

ATH24B

4" Stepped Baffle with Adjustable Lamp Holder

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 75W max.


Halogen, MR16 (E26), 50W max.

Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)

LED, MR16 (E26)

LED, MR16 (GU10)



35°

P. 31-37

Ordering Guide

Baffle		Metal Trim Ring	
ATH24B -			
WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass



ATH24C

4" Reflector with Adjustable Lamp Holder

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 75W max.


Halogen, MR16 (E26), 50W max.

Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)

LED, MR16 (E26)

LED, MR16 (GU10)



35°

P. 31-37

Ordering Guide

Reflector		Metal Trim Ring	
ATH24C -			
CL : Clear	WH : White	MO : Mocha	
WH : White	BK : Black	CA : Cappuccino	
GD : Gold	SN : Satin Nickel	CH : Chrome	
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	
CP : Champagne	AC : Antique Copper	PB : Polished Brass	
OR : Pewter			
MA : Matte Platinum			



ATH43

4" Retractable Wall Wash

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.


Halogen, MR16 (E26), 50W max.

Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)

LED, MR16 (E26)

LED, MR16 (GU10)



80°

P. 31-37

Ordering Guide

Metal Trim Ring	
ATH43 -	
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass

Example: ATH43-WH



ATH47


4" Adjustable Wall Wash

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)



35°

P. 31-37

Ordering Guide

ATH47 -	Metal Trim Ring
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass



ATH48E


4" Adjustable Eyeball

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)



35°

P. 31-37

Ordering Guide

ATH48E -	Metal Trim Ring
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass



ATH84E


4" Eyeball with Baffle

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)




35°

P. 31-37

Ordering Guide

ATH84E -	Baffle	-	Metal Trim Ring
WH : White	MO : Mocha		WH : White
BK : Black	CA : Cappuccino		MO : Mocha
SN : Satin Nickel	CH : Chrome		BK : Black
AN : Antique Nickel	UN : Natural Steel		CA : Cappuccino
AC : Antique Copper	PB : Polished Brass		SN : Satin Nickel
			CH : Chrome
			AN : Antique Nickel
			UN : Natural Steel
			AC : Antique Copper
			PB : Polished Brass

Example: ATH84E-BK-WH

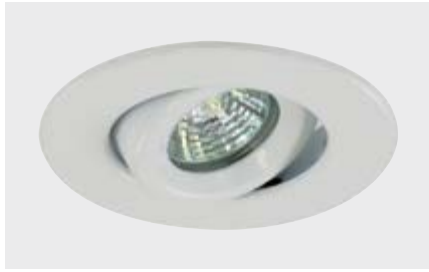

GR-TH18R


4" Tilting Gimbal

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 75W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)




35°

P. 31-37

Ordering Guide

GR-TH18R - Metal Trim Ring

WH : White
BK : Black
AB : Antique Brass
BN : Brushed Nickel
FWH : Matte White
STS : Stainless Steel

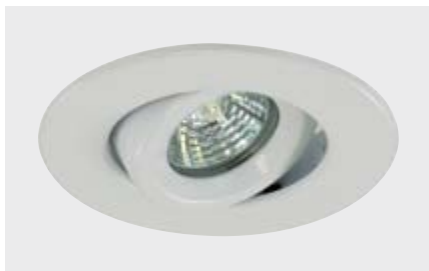

GR-TH18R3


4" Rear Load Gimbal

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 75W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)




35°

P. 31-37

Ordering Guide

GR-TH18R3 - Metal Trim Ring

WH : White
BK : Black
AN : Antique Brass
BN : Brushed Nickel
FWH : Matte White
MIV : Matte Ivory
TP : Taupe
STS : Stainless Steel

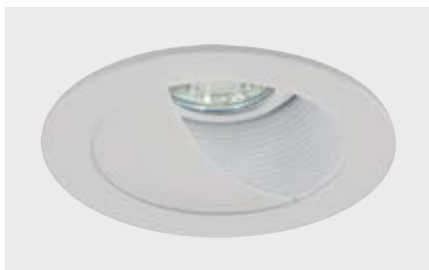

ATH25B


4" Wall Wash with Baffle

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)



P. 31-37

Ordering Guide

ATH25B - Baffle - Metal Trim Ring

WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass

Example: ATH25B-WH-WH



ATH25C


4" Wall Wash with Reflector

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)



HOUSING

P. 31-37

Ordering Guide

ATH25C -	Reflector	-	Metal Trim Ring
	CL : Clear		WH : White
	WH : White		BK : Black
	GD : Gold		SN : Satin Nickel
	HC : Haze Clear		AN : Antique Nickel
	CP : Champagne		AC : Antique Copper
	OR : Pewter		PB : Polished Brass
	MA : Matte Platinum		



ATH29


4" Slotted Wall Wash with Baffle

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)



HOUSING

P. 31-37

Ordering Guide

ATH29 -	Baffle	-	Metal Trim Ring
	WH : White		WH : White
	BK : Black		BK : Black
	SN : Satin Nickel		SN : Satin Nickel
	AN : Antique Nickel		AN : Antique Nickel
	AC : Antique Copper		AC : Antique Copper
	MO : Mocha		MO : Mocha
	CA : Cappuccino		CA : Cappuccino
	CH : Chrome		CH : Chrome
	UN : Natural Steel		UN : Natural Steel
	PB : Polished Brass		PB : Polished Brass



ATH35B


4" Pin Spot

2" pin spot aperture. Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.
Halogen, MR16 (E26), 50W max.
Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)
LED, MR16 (E26)
LED, MR16 (GU10)



HOUSING

P. 31-37

Ordering Guide

ATH35B -	Baffle	-	Metal Trim Ring
	WH : White		WH : White
	BK : Black		BK : Black
	SN : Satin Nickel		SN : Satin Nickel
	AN : Antique Nickel		AN : Antique Nickel
	AC : Antique Copper		AC : Antique Copper
	MO : Mocha		MO : Mocha
	CA : Cappuccino		CA : Cappuccino
	CH : Chrome		CH : Chrome
	UN : Natural Steel		UN : Natural Steel
	PB : Polished Brass		PB : Polished Brass

Example: ATH35B-BK-WH




ATH34P

4" Pin Hole with Baffle

1" pin spot aperture. Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.	LED, MR16 (GU5.3)
Halogen, MR16 (E26), 50W max.	LED, MR16 (E26)
Halogen, MR16 (GU10), 50W max.	LED, MR16 (GU10)



HOUSING

P. 31-37

Ordering Guide

ATH34P - Baffle		Metal Trim Ring	
WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass




ATH28

4" Tilting Gimbal

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 75W max.	LED, MR16 (GU5.3)
Halogen, MR16 (E26), 50W max.	LED, MR16 (E26)
Halogen, MR16 (GU10), 50W max.	LED, MR16 (GU10)



35°

HOUSING

P. 31-37

Ordering Guide

ATH28 - Metal Trim Ring	
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass




ATH452

4" Decorative Frosted Glass with Reflector

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 50W max.	LED, MR16 (GU5.3)
Halogen, MR16 (E26), 50W max.	LED, MR16 (E26)
Halogen, MR16 (GU10), 50W max.	LED, MR16 (GU10)




HOUSING

P. 31-37

Ordering Guide

ATH452 - Reflector		Metal Trim Ring	
CL : Clear	WH : White	MO : Mocha	
WH : White	BK : Black	CA : Cappuccino	
GD : Gold	SN : Satin Nickel	CH : Chrome	
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	
CP : Champagne	AC : Antique Copper	PB : Polished Brass	
OR : Pewter			
MA : Matte Platinum			

Example: ATH452-CL-WH

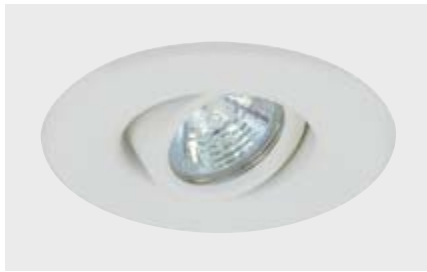

GR-TH313

4" Tilting Gimbal

Metal trim ring.

Lamping Options

Halogen, MR16 (GU5.3), 75W max.


Halogen, MR16 (E26), 50W max.

Halogen, MR16 (GU10), 50W max.

LED, MR16 (GU5.3)

LED, MR16 (E26)

LED, MR16 (GU10)



35°



P. 31-37

Ordering Guide

GR-TH313 -

FWH : Matte White

MIV : Matte Ivory



AT4A02

4" Aluminum Reflector and Trim Ring


Lamping Options

Halogen, MR16 (GU5.3), 75W max.

Halogen, MR16 (E26), 50W max.

LED, MR16 (GU5.3)

LED, MR16 (E26)



Marine Grade



P. 31-37

Ordering Guide

AT4A02 - -

CL : Clear

FWH : Matte White

ABK : Anodized Black

AL : Aluminum

FWH : Matte White



AT4A02S

4" Aluminum Reflector and Square Trim Ring


Lamping Options

Halogen, MR16 (GU5.3), 75W max.

Halogen, MR16 (E26), 50W max.

LED, MR16 (GU5.3)

LED, MR16 (E26)



Marine Grade



P. 31-37

Ordering Guide

AT4A02S - -

CL : Clear


FWH : Matte White

ABK : Anodized Black

AL : Aluminum

FWH : Matte White

Example: AT4A02S-CL-AL

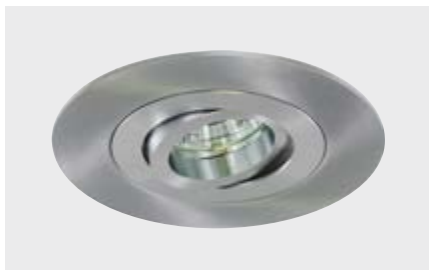

AT4A18



4" Aluminum Gimbal and Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 75W max.
Halogen, MR16 (E26), 50W max.
LED, MR16 (GU5.3)
LED, MR16 (E26)

Ordering Guide

	Gimbal	Trim Ring
AT4A18	<input type="text"/>	<input type="text"/>
	CL : Clear	AL : Aluminum
	FWH : Matte White	FWH : Matte White
	ABK : Anodized Black	



AT4A18S



4" Aluminum Gimbal and Square Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 75W max.
Halogen, MR16 (E26), 50W max.
LED, MR16 (GU5.3)
LED, MR16 (E26)

Ordering Guide

	Gimbal	Trim Ring
AT4A18S	<input type="text"/>	<input type="text"/>
	CL : Clear	AL : Aluminum
	FWH : Matte White	FWH : Matte White
	ABK : Anodized Black	



AT402



4" Aluminum Reflector and Die Cast Aluminum Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 75W max.
Halogen, MR16 (E26), 50W max.
LED, MR16 (GU5.3)
LED, MR16 (E26)

Ordering Guide

	Reflector	Trim Ring
AT402	<input type="text"/>	<input type="text"/>
	ABK : Anodized Black	FWH : Matte White
	FWH : Matte White	BN : Brushed Nickel
	BN : Brushed Nickel	CH : Chrome
	HC : Haze Clear	AL : Aluminum
	CH : Chrome	BK : Black

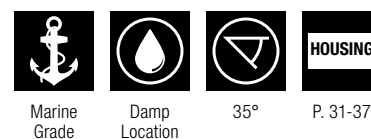

Example: AT402-ABK-FWH




AT402S

4" Reflector with Square Trim Ring

Lamping Options

Halogen, MR16 (GU5.3), 75W max.
Halogen, MR16 (E26), 50W max.
LED, MR16 (GU5.3)
LED, MR16 (E26)



Ordering Guide

	Reflector	Trim Ring
AT402S -	<input type="text"/>	<input type="text"/>
	ABK : Anodized Black	BK : Black
	FWH : Matte White	FWH : Matte White
	BN : Brushed Nickel	BN : Brushed Nickel
	HC : Haze Clear	
	CH : Chrome	




GR-TH12

4" Shower Trim with Frosted Glass Lens


Lamping Options

Halogen, MR16 (GU5.3), 35W max.
Halogen, MR16 (E26), 35W max.



Ordering Guide

	Trim Ring
GR-TH12 -	<input type="text"/>
	WH : White
	BN : Brushed Nickel
	CH : Chrome
	FWH : Matte White




HV4-TH4013

4" Shower Trim with Frosted Glass Lens


Lamping Options

Halogen, MR16 (GU5.3), 35W max.
Halogen, MR16 (E26), 35W max.



Ordering Guide

	Trim Ring
HV4-TH4013 -	<input type="text"/>
	WH : White
	BN : Brushed Nickel
	CH : Chrome
	FWH : Matte White



Example: HV4-TH4013-CH




HV4-TH4019

4" Shower Trim with Dropped Frosted Glass Lens

Lamping Options

Halogen, MR16 (GU5.3), 35W max.
Halogen, MR16 (E26), 35W max.



Damp
Location



P. 31-37

Ordering Guide

HV4-TH4019 -
WH : White




HV4-TH4014

4" Shower Trim with Dropped Frosted Glass Lens

Lamping Options

PAR20, 35W max.



Damp
Location



P. 31-37

Ordering Guide

HV4-TH4014 -
WH : White




RTM415S

4" Square Shower Trim with Frosted Lens

Lamping Options

Halogen, MR16 (GU5.3), 35W max.
Halogen, MR16 (E26), 35W max.



Damp
Location



P. 31-37

Ordering Guide

RTM415S -
WH : White
STS : Stainless Steel
FWH : Matte White

Example: RTM415S-WH



The RF401A is a 4" aperture line voltage housing with adjustable socket for use in new construction applications. Approved for damp locations. The RF401A offers a wide choice of trim types including reflector, wall wash and retractable trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

NOT FOR USE IN INSULATED CEILINGS

RF401A

4" Line Voltage New Construction Housing with Adjustable Socket

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. Adjustable housing height allows for ceiling thicknesses up to 1-1/4" (32mm). The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts and one 3/4" knockout with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides

easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Adjustable Socket

Medium-base ceramic socket acts as a heat sink. It accommodates medium-base lamps for use with MR16, PAR20, and R20. Socket is attached to an adjustable bracket to control the height of the socket inside the can.

Lamping Options

Incandescent

- MR16 E26 120V, 50 watt max.
- PAR20 120V, 50 watt max.
- R20 120V, 50 watt max.



LED

- PAR20 120V

Trim Options

See pages 54-58

Dimensions

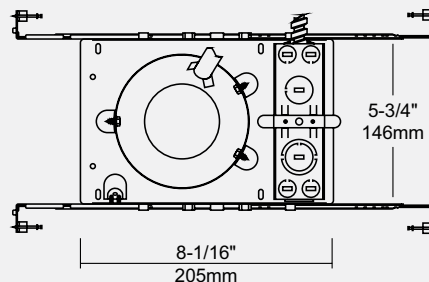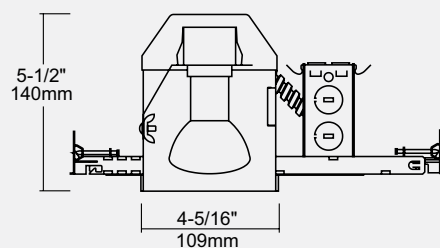

Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features



4-3/8"
111mm



Line
Voltage



Damp
Location





The RF402A is a 4" aperture line voltage housing with adjustable socket for use in remodeling applications making it suitable for T-bar ceiling applications. Approved for damp locations. The RF402A offers a wide choice of trim types including reflector, wall wash and retractable trims.

RF402A

4" Line Voltage Remodel Housing with Adjustable Socket

Housing Can

Galvanized steel construction housing. Allows for use in 2" x 6" joist construction. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Mounting Clips

Four pressure clips with locking tab located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 5/8" (16mm).

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Nine 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Adjustable Socket

Medium-base ceramic socket acts as a heat sink. It accommodates medium-base lamps for use with MR16, PAR20, and R20. Socket is attached to an adjustable bracket to control the height of the socket inside the can.

Lamping Options

Incandescent

- MR16 E26 120V, 50 watt max.
- PAR20 120V, 50 watt max.
- R20 120V, 50 watt max.

LED



- PAR20 120V

Trim Options

See pages 54-58

NOT FOR USE IN INSULATED CEILINGS

Dimensions

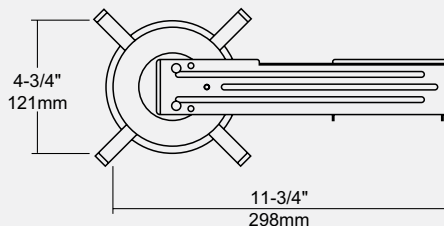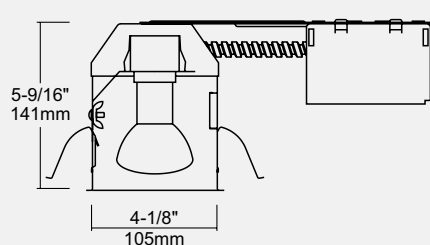

Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features



4-3/8"
111mm



Line
Voltage



Damp
Location





The RF405A is a 4" aperture line voltage housing with adjustable socket for use in insulated ceiling new construction applications. The RF405A is designed to be in direct contact with ceiling insulation. The RF405A offers a wide choice of trim types including reflector, wall wash and retractable trims. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

RF405A

4" Line Voltage New Construction Air-Tight Housing for Insulated Ceilings with Adjustable Socket

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. A collar gasket is supplied with the housing to reduce airflow into the plenums and ceiling cavities. Adjustable housing height allows for ceiling thicknesses up to 1-1/4" (32mm). The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location. Includes a gasket.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum four no. 12 AWG 90°C branch-circuit conductors (two in and two out). Five 1/2" knockouts and one 3/4" knockout with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile

joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping.

Adjustable Socket

Medium-base ceramic socket. It accommodates medium-base lamps for use with MR16, PAR20, and R20. Socket is attached to an adjustable bracket to control the height of the socket inside the can.

Lamping Options

Incandescent

- MR16 E26 120V, 50 watt max.
- PAR20 120V, 50 watt max.
- R20 120V, 50 watt max.


LED

- PAR20 120V

Trim Options


See pages 54-58

Dimensions

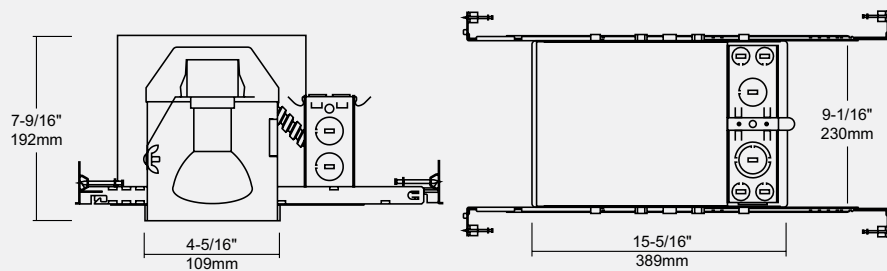

Optional Accessories


VBE-1

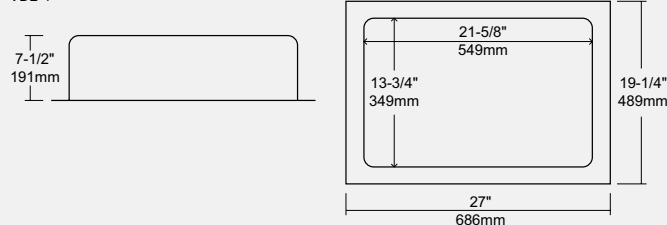

Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features

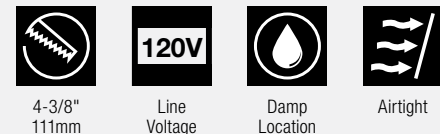



The RF401 is a 4" aperture line voltage housing for use in new construction applications. The RF401 offers a wide choice of trim types including reflector, wall wash and retractable trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

RF401

4" Line Voltage New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. Adjustable housing height allows for ceiling thicknesses up to 1-1/4" (32mm). The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductions (four in and four out). Five 1/2" knockouts and one 3/4" knockout with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Medium-base ceramic socket. It accommodates medium-base lamps for use with MR16, PAR20, and R20.

Lamping Options



- Incandescent
- MR16 E26 120V, 50 watt max.
 - PAR20 120V, 50 watt max.
 - R20 120V, 50 watt max.
- LED
- PAR20 120V

Trim Options

See pages 54-58

NOT FOR USE IN INSULATED CEILINGS

Dimensions

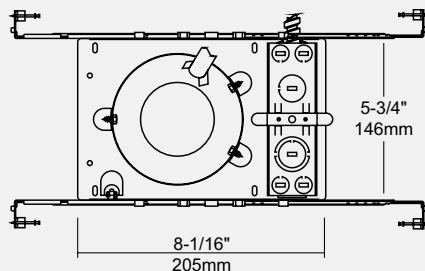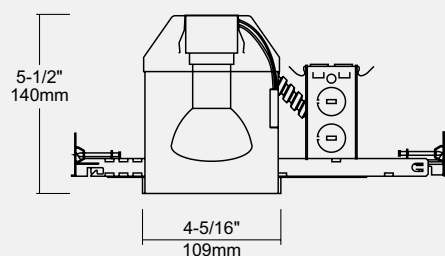

Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features



4-3/8"
111mm



Line
Voltage



Damp
Location





The RF402 is a 4" aperture line voltage housing for use in remodeling applications making it suitable for T-bar ceiling applications. The RF402 offers a wide choice of trim types including reflector, wall wash and retractable trims.

RF402

4" Line Voltage Remodel Housing

Housing Can

Steel construction housing. Allows for use in 2" x 6" joist construction. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Mounting Clips

Four pressure clips with locking tab located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 5/8" (16mm).

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Nine 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Medium-base ceramic socket. It accommodates medium-base lamps for use with MR16, PAR20, and R20.

Lamping Options

Incandescent

- MR16 E26 120V, 50 watt max.
- PAR20 120V, 50 watt max.

- R20 120V, 50 watt max.

LED



- PAR20 120V

Trim Options

See pages 54-58

NOT FOR USE IN INSULATED CEILINGS

Dimensions

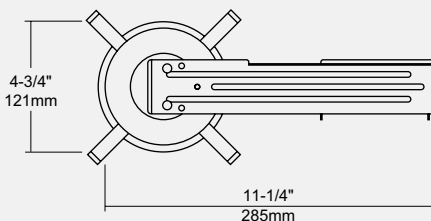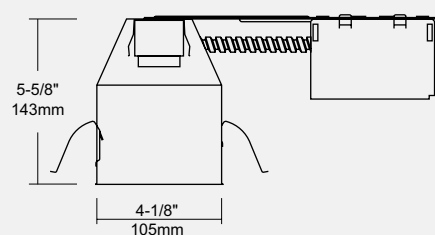

Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features



4-3/8"
111mm



Line
Voltage



Damp
Location





The RF402C is a 4" aperture line voltage housing with screw down "C" style clips for use in remodeling applications. The RF402C offers a wide choice of trim types including reflector, wall wash and retractable trims.

RF402C

4" Line Voltage "C" Style Remodel Housing

Housing Can

Steel construction housing. Allows for use in 2" x 6" joist construction. The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues.

Mounting Clips

Two pressure screw down clips located on the wall of the housing can. These clips can accommodate ceilings with thicknesses up to 1" (25mm).

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Nine 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Socket

Medium-base ceramic socket. It accommodates medium-base lamps for use with MR16, PAR20, and R20.

Lamping Options

Incandescent

- MR16 E26 120V, 50 watt max.
- PAR20 120V, 50 watt max.

- R20 120V, 50 watt max.

LED

- PAR20 120V

Optional Accessories



P-4000 / P-4010 new construction mounting plate for use with RF402C housing.

Trim Options

See pages 54-58


NOT FOR USE IN INSULATED CEILINGS

Dimensions

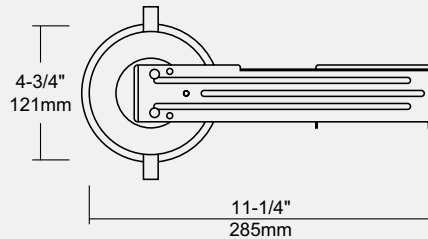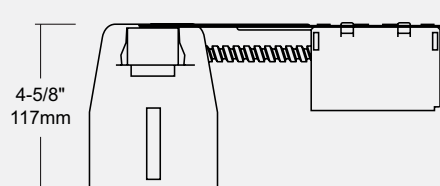

Optional Accessories

P-4000 / P-4010

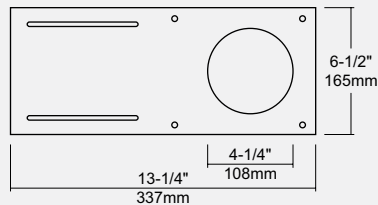

Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features



4-3/8"
111mm



Line
Voltage



Damp
Location





The RF405 is a 4" aperture line voltage housing for use in new construction applications. The RF405 is designed for insulated ceilings and can be in direct contact with ceiling insulation. The RF405 offers a wide choice of trim types including reflector, wall wash and retractable trims. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

RF405

4" Line Voltage New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. A collar gasket is supplied with the housing to reduce airflow into the plenums and ceiling cavities. Adjustable housing height allows for ceiling thicknesses up to 1-1/4" (32mm). The housing includes a Stucco Stopper that prevents foreign objects, such as paint and plaster, from entering the housing and causing overheating issues. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location. Includes a gasket.

Junction Box

Pre-wired three quick connectors included for easy wiring. Listed for through branch circuit wiring. Maximum four no. 12 AWG 90°C branch-circuit conductors (two in and two out). Five 1/2" knockouts and one 3/4" knockout with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile

joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

System Protection

Self-resetting thermal protector deactivates fixture if overheating occurs due to improper lamping.

Socket

Medium-base ceramic socket. It accommodates medium-base lamps for use with MR16, PAR20, and R20.

Lamping Options

Incandescent

- MR16 E26 120V, 50 watt max.
- PAR20 120V, 50 watt max.
- R20 120V, 50 watt max.


LED

- PAR20 120V

Trim Options


See pages 54-58

Dimensions

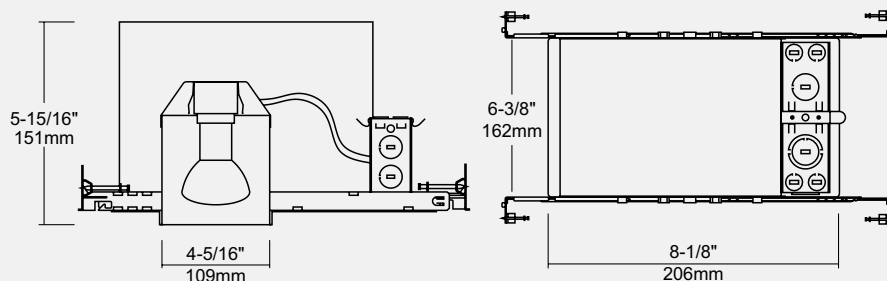

Optional Accessories


VBE-1

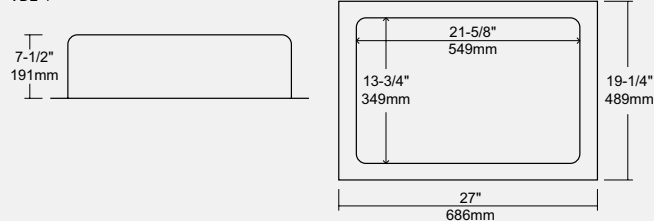


Compatible Lamps

- MR16 E26, 50W max.
- PAR20, 50W max.
- LED PAR20

Icon Features



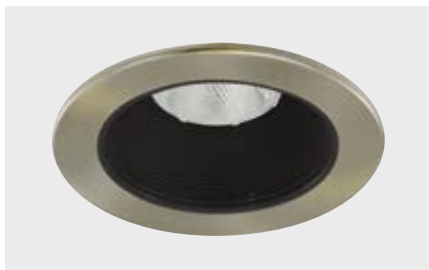

AT24B

4" Baffle

Metal trim ring.


Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

ing Guide

Baffle		Metal Trim Ring	
AT24B - <div></div> - <div></div>			
WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass



HOUSING

P. 47-53



AT24C

4" Reflector

Metal trim ring.


Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

ing Guide

	Reflector		Metal Trim Ring
AT24C	<div></div>	-	<div></div>
CL :	Clear	WH :	White
WH :	White	BK :	Black
GD :	Gold	SN :	Satin Nickel
HC :	Haze Clear	AN :	Antique Nickel
CP :	Champagne	AC :	Antique Copper
OR :	Pewter		
MA :	Matte Platinum		
		MO :	Mocha
		CA :	Cappuccino
		CH :	Chrome
		UN :	Natural Steel
		PB :	Polished Brass



HOUSING

P. 47-53



AT215

4" Albalite Lens


Metal trim ring.

Lamping Options

- MR16 E26, 120V, 35W max.
- PAR20, 120V, 35W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Metal Trim Ring	
AT215 - []	
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass



HOUSING

P. 47-53

Example: AT215-WH




AT216

4" Drop Opal Lens

Metal trim ring.

Lamping Options

- MR16 E26, 120V, 35W max.
- PAR20, 120V, 35W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V



HOUSING

P. 47-53

Ordering Guide

AT216 -	Metal Trim Ring
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass




AT217

4" Fresnel Lens

Metal trim ring.

Lamping Options

- MR16 E26, 120V, 35W max.
- PAR20, 120V, 35W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V



HOUSING

P. 47-53

Ordering Guide

AT217 -	Metal Trim Ring
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass




AT84E

4" Adjustable Eyeball

Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V



HOUSING


35°

P. 47-53

Ordering Guide

AT84E -	Metal Trim Ring
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass

Example: AT84E-WH

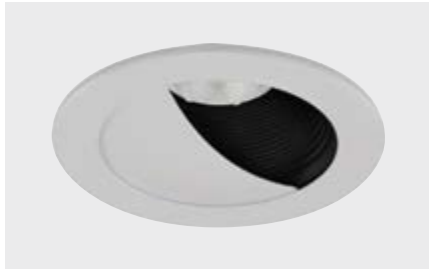

AT25B

4" Wall Wash with Baffle


Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Baffle		Metal Trim Ring	
AT25B -			
WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass



HOUSING

P. 47-53



AT25C

4" Wall Wash with Reflector


Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Reflector		Metal Trim Ring	
AT25C -			
CL : Clear	WH : White	MO : Mocha	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass	PB : Polished Brass
OR : Pewter			
MA : Matte Platinum			



HOUSING

P. 47-53



AT29B

4" Slotted Wall Wash with Baffle


Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Baffle		Metal Trim Ring	
AT29B -			
WH : White	MO : Mocha	WH : White	MO : Mocha
BK : Black	CA : Cappuccino	BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome	SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel	AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass	AC : Antique Copper	PB : Polished Brass



HOUSING

P. 47-53

Example: AT29B-WH-WH



AT29C

4" Slotted Wall Wash with Reflector


Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Reflector	Metal Trim Ring
AT29C - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 47-53



AT34P

4" Pin Spot with Baffle


1" pin spot aperture. Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Baffle	Metal Trim Ring
AT34P - <input type="text"/>	<input type="text"/>
WH : White	WH : White
BK : Black	BK : Black
SN : Satin Nickel	SN : Satin Nickel
AN : Antique Nickel	AN : Antique Nickel
AC : Antique Copper	AC : Antique Copper
MO : Mocha	MO : Mocha
CA : Cappuccino	CA : Cappuccino
CH : Chrome	CH : Chrome
UN : Natural Steel	UN : Natural Steel
PB : Polished Brass	PB : Polished Brass



HOUSING

P. 47-53



AT28

4" Gimbal


Metal trim ring.

Lamping Options

- PAR20, 120V, 50W max.
- R20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

Metal Trim Ring
AT28 - <input type="text"/>
WH : White
BK : Black
SN : Satin Nickel
AN : Antique Nickel
AC : Antique Copper
MO : Mocha
CA : Cappuccino
CH : Chrome
UN : Natural Steel
PB : Polished Brass




35°

HOUSING

P. 47-53

Example: AT28-BK

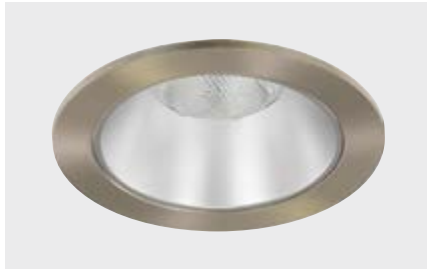

AT402P


4" Aluminum Reflector and Die Cast Aluminum Trim Ring

Lamping Options


- PAR20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

	Reflector		Metal Trim Ring
AT402P	-		-
	ABK : Anodized Black		FWH : Matte White
	FWH : Matte White		BN : Brushed Nickel
	BN : Brushed Nickel		CH : Chrome
	HC : Haze Clear		AL : Aluminum
	CH : Chrome		



P. 47-53

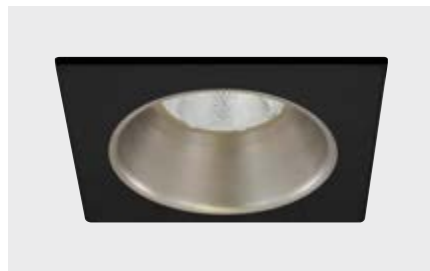

AT402PS

4" Reflector with Square Trim Ring


Stamped steel.

Lamping Options

- PAR20, 120V, 50W max.
- PAR20 LED, 120V

Ordering Guide

	Reflector		Metal Trim Ring
AT402PS	-		-
	ABK : Anodized Black		BK : Black
	FWH : Matte White		FWH : Matte White
	BN : Brushed Nickel		BN : Brushed Nickel
	HC : Haze Clear		
	CH : Chrome		



P. 47-53



HV4-TH4014


4" Shower Trim with Dropped Frosted Glass Lens

Lamping Options

- PAR20, 120V, 35W max.
- PAR20 LED, 120V

Ordering Guide

	Trim Ring
HV4-TH4014	-
	WH : White



P. 47-53

Example: HV4-TH4014-WH



The A4551-120 is a 4" aperture flat frame-in kits for vertical A and PAR lamps. These are designed for non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A4551-120

4" Flat Vertical Frame-in Kit, 120V

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips for firmly holding reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent


- A19, 100 watt max
- PAR20, 50 watt max
- LED
- PAR20

Trim Options

See pages 62-64

NOT FOR USE IN INSULATED CEILINGS


Dimensions

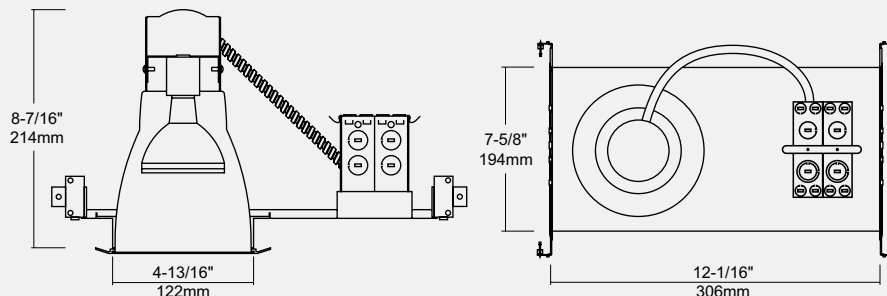

Compatible Lamps

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20

Icon Features

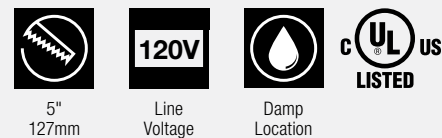



The A4552-120 is a 4" aperture remodel frame-in kit for vertical A and PAR lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A4552-120

4" Remodel Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips for firmly holding reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A19, 100 watt max
- PAR20, 50 watt max

LED


- PAR20

Trim Options

See pages 62-64

NOT FOR USE IN INSULATED CEILINGS

Dimensions

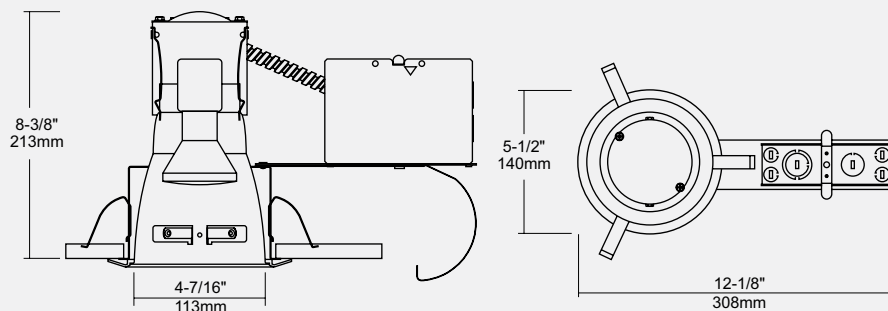

Compatible Lamps

A19, 100W max.

PAR20, 50W max.

LED PAR20

Icon Features



5"
127mm



Line
Voltage



Damp
Location





The A4556-120 is a 4" aperture frame-in kit for vertical A and PAR lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflector, lenses and wall wash trims.

A4556-120

4" Architectural Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips for firmly holding reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A19, 100 watt max
- PAR20, 50 watt max
- LED
- PAR20

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 62-64

NOT FOR USE IN INSULATED CEILINGS


Dimensions

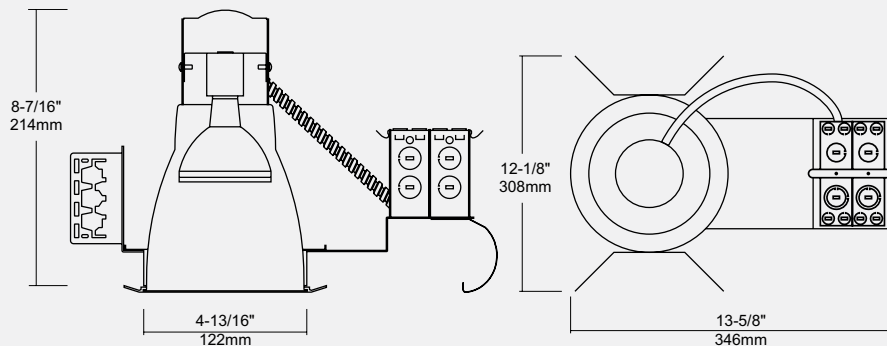

Compatible Lamps

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20

Icon Features

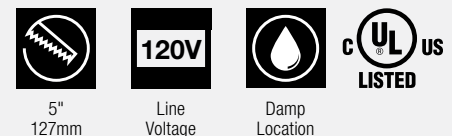



AT149R


4" Full Open Reflector

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20

Ordering Guide

Reflector	Metal Trim Ring
AT149R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 59-61



AT149RF


4" Full Open Self-Flanged Reflector

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20

Ordering Guide

Reflector
AT149RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



HOUSING

P. 59-61



AT140B


4" Reflector with Baffle

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT140B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		



HOUSING

P. 59-61

Example: AT140B-CL-BK-WH




AT146B

4" Reflector with Regressed Lens and Baffle

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20



P. 59-61

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT146B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT146C

4" Reflector with Regressed Lens and Reflector Splay

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20



P. 59-61

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT146C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT146C-CL-CH-WH-FR




AT148

4" Reflector with Frosted Drop Lens

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20



HOUSING

P. 59-61

Ordering Guide

Reflector	Metal Trim Ring
AT148 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT148S

4" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20



HOUSING

P. 59-61

Ordering Guide

Reflector	Metal Trim Ring
AT148S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT141

4" Reflector with Wall Wash Kickplate

Lamping Options

- A19, 100W max.
- PAR20, 50W max.
- LED PAR20



HOUSING

P. 59-61

Ordering Guide

Reflector	Metal Trim Ring
AT141 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT141-HC-WH



The A6551-120 is a 6" aperture flat frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6551-120

6" Flat Vertical Frame-in Kit, 120V

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent



- A19, 100 watt max.
- A21, 150 watt max.
- PAR30, 75 watt max.
- LED
- PAR30

Trim Options

See pages 68-71

NOT FOR USE IN INSULATED CEILINGS

Dimensions

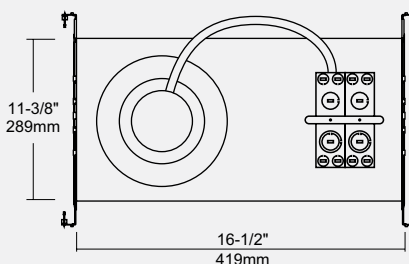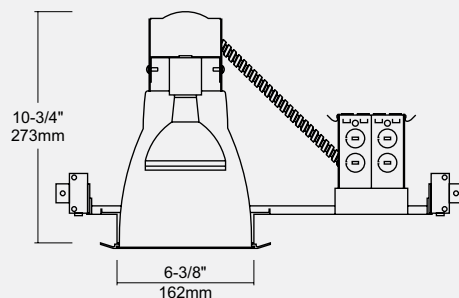

Compatible Lamps

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Icon Features



6-1/2"
165mm



Line
Voltage



Damp
Location





The A6552-120 is a 6" aperture remodel frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A6552-120

6" Remodel Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips for firmly holding reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A19, 100 watt max.
- A21, 150 watt max.
- PAR30, 75 watt max.

LED


- PAR30

Trim Options

See pages 68-71

NOT FOR USE IN INSULATED CEILINGS

Dimensions

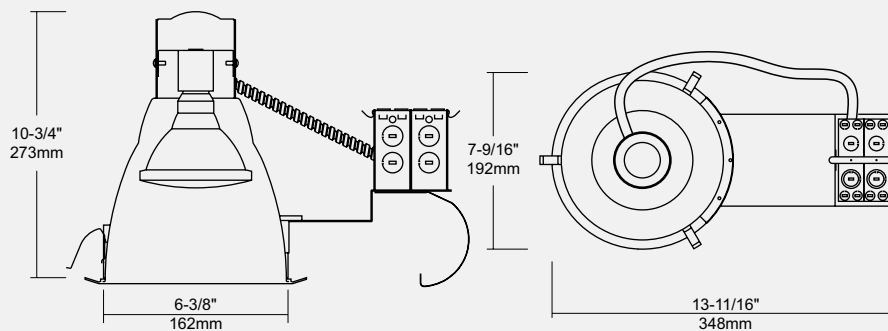

Compatible Lamps

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Icon Features



6-1/2"
165mm



Line
Voltage



Damp
Location





The A6556-120 is a 6" aperture frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflector, lenses and wall wash trims.

A6556-120

6" Architectural Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A19, 100 watt max.
- A21, 150 watt max.
- PAR30, 75 watt max.

LED

- PAR30

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 68-71

NOT FOR USE IN INSULATED CEILINGS


Dimensions

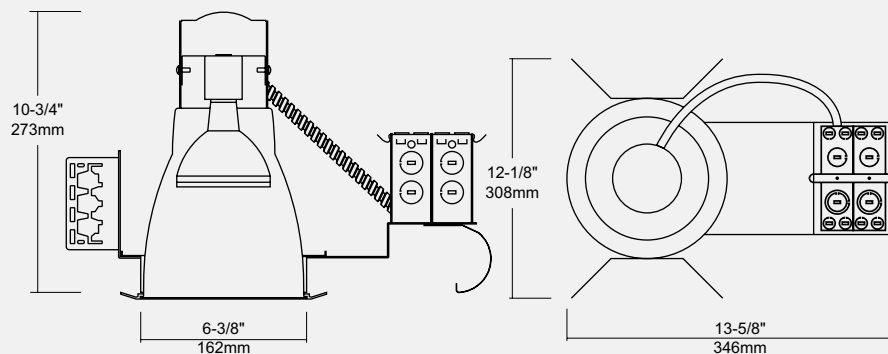

Compatible Lamps

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Icon Features

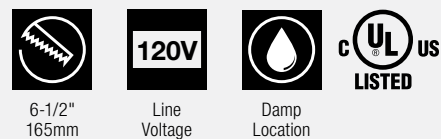



AT169R


6" Full Open Reflector

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Ordering Guide

Reflector	Metal Trim Ring
AT169R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 65-67



AT169RF


6" Full Open Self-Flanged Reflector

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30


Ordering Guide

Reflector
AT169RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



HOUSING

P. 65-67

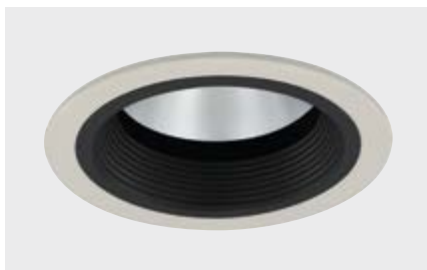

AT160B


6" Reflector with Baffle

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT160B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		



HOUSING

P. 65-67

Example: AT160B-CL-BK-WH




AT166B

6" Reflector with Regressed Lens and Baffle

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30



P. 65-67

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT166B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT166C

6" Reflector with Regressed Lens and Reflector Splay

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30



P. 65-67

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT166C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT166C-HC-CH-WH-FR



AT168


6" Reflector with Frosted Drop Lens

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Ordering Guide

Reflector	Metal Trim Ring
AT168 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 65-67



AT168S


6" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Ordering Guide

Reflector	Metal Trim Ring
AT168S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 65-67



AT161


6" Reflector with Wall Wash Kickplate

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30

Ordering Guide

Reflector	Metal Trim Ring
AT161 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 65-67

Example: AT161-HC-WH




AT1659R

6" Reflector with Cross Louver Blade

Lamping Options

- A19, 100W max.
- A21, 150W max.
- PAR30, 75W max.
- LED PAR30



P. 65-67

Ordering Guide

Reflector	Metal Trim Ring
AT1659R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT1659R-CL-WH



The A8551-120 is an 8" aperture flat frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A8551-120

8" Flat Vertical Frame-in Kit, 120V

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A21, 150 watt max.
- PAR38, 250 watt max.
- R40, 300 watt max.
- PS25, 300 watt max.

LED


- PAR38

Trim Options

See pages 75-78

NOT FOR USE IN INSULATED CEILINGS

Dimensions

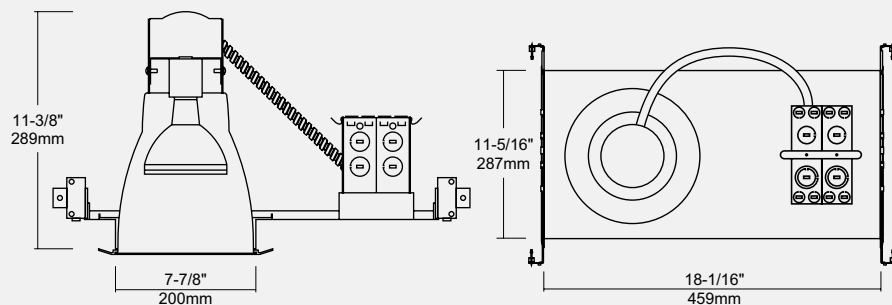

Compatible Lamps

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38

Icon Features



8-1/8"
206mm



Line
Voltage



Damp
Location





The A8552-120 is an 8" aperture remodel frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A8552-120

8" Remodel Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A21, 150 watt max.
- PAR38, 250 watt max.
- R40, 300 watt max.
- PS25, 300 watt max.

LED


- PAR38

Trim Options

See pages 75-78

NOT FOR USE IN INSULATED CEILINGS

Dimensions

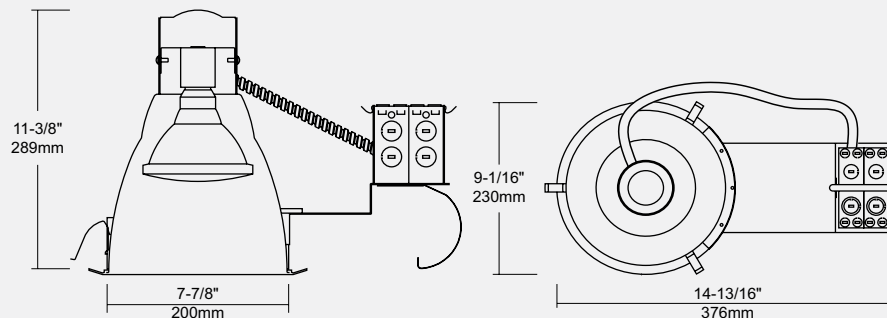

Compatible Lamps

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38

Icon Features



8-1/8"
206mm



Line
Voltage



Damp
Location





The A8556-120 is an 8" aperture frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A8556-120

8" Architectural Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A21, 150 watt max.
- PAR38, 250 watt max.
- R40, 300 watt max.
- PS25, 300 watt max.

LED

- PAR38

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 75-78

NOT FOR USE IN INSULATED CEILINGS

Dimensions

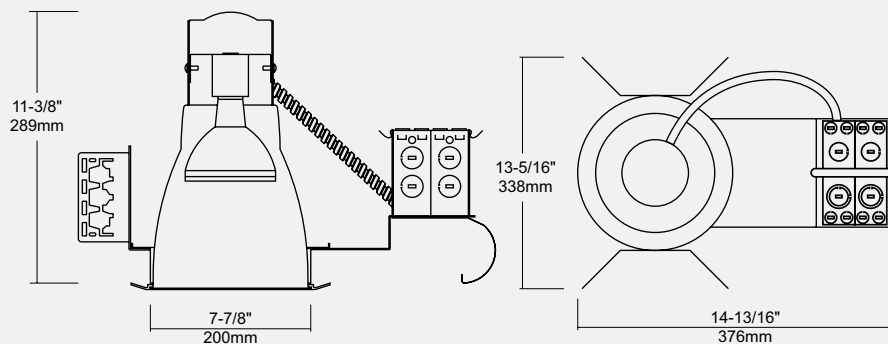

Compatible Lamps

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38

Icon Features



8-1/8"
206mm



Line
Voltage



Damp
Location






AT189R

8" Full Open Reflector

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Metal Trim Ring
AT189R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT189RF

8" Full Open Self-Flanged Reflector

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector
AT189RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT180B

8" Reflector with Baffle

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT180B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		

Example: AT180B-CL-BK-WH




AT186B

8" Reflector with Regressed Lens and Baffle

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT186B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT186C

8" Reflector with Regressed Lens and Reflector Splay

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT186C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT186C-CL-CH-WH-FR




AT188

8" Reflector with Frosted Drop Lens

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Metal Trim Ring
AT188 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT188S

8" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Metal Trim Ring
AT188S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT181

8" Reflector with Wall Wash Kickplate

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Metal Trim Ring
AT181 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT181-HC-WH




AT1859R

8" Reflector with Cross Louver Blade

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Metal Trim Ring
AT1859R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass




AT187

8" Reflector with Frosted Lens on Surface

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 72-74

Ordering Guide

Reflector	Metal Trim Ring
AT187 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass

Example: AT187-CL-WH



The A10551-120 is a 10" aperture flat frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A10551-120

10" Flat Vertical Frame-in Kit, 120V

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A21, 150 watt max.
- PAR38, 250 watt max.
- R40, 300 watt max.
- PS25, 300 watt max.

LED



- PAR38

Trim Options

See pages 82-84

NOT FOR USE IN INSULATED CEILINGS

Dimensions

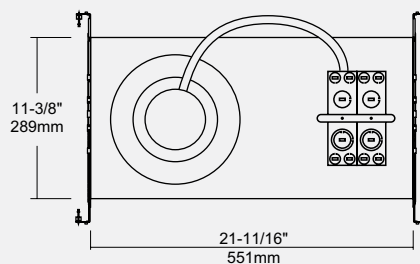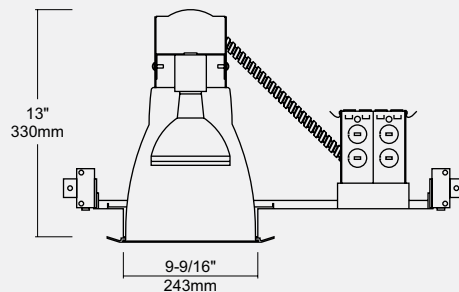

Compatible Lamps

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38

Icon Features



9-3/4"
248mm



Line
Voltage



Damp
Location





The A10552-120 is a 10" aperture remodel frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A10552-120

10" Remodel Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent


- A21, 150 watt max.
 - PAR38, 250 watt max.
 - R40, 300 watt max.
 - PS25, 300 watt max.
- LED
- PAR38

Trim Options

See pages 82-84

NOT FOR USE IN INSULATED CEILINGS

Dimensions

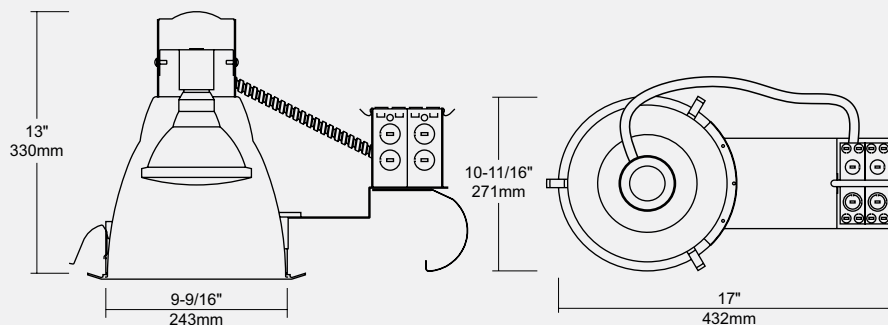

Compatible Lamps

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38

Icon Features



9-3/4"
248mm



Line
Voltage



Damp
Location





The A10556-120 is a 10" aperture frame-in kit for vertical A and PAR lamps. They are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A10556-120

10" Architectural Vertical Frame-in Kit, 120V

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

120V operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Lamp socket is height adjustable. It accommodates medium base A and PAR lamps.

Lamping Options

Incandescent

- A21, 150 watt max.
- PAR38, 250 watt max.
- R40, 300 watt max.
- PS25, 300 watt max.
- LED
- PAR38

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 82-84

NOT FOR USE IN INSULATED CEILINGS


Dimensions

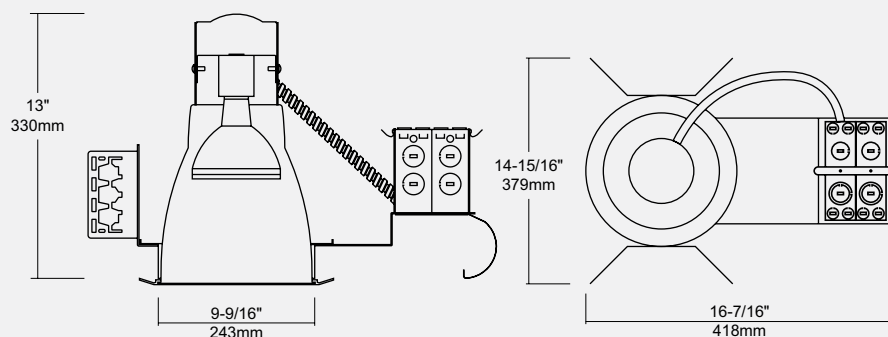

Compatible Lamps

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38

Icon Features

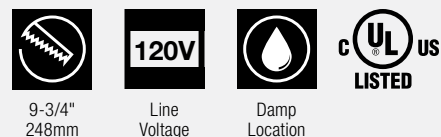




AT1109R

10" Full Open Reflector

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector	Metal Trim Ring
AT1109R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT1109RF

10" Full Open Self-Flanged Reflector

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector
AT1109RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT1100B

10" Reflector with Baffle

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT1100B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		

Example: AT1100B-CL-BK-WH




AT196B

10" Reflector with Regressed Lens and Baffle

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT196B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White	FR : Fresnel Lens
WH : White	BK : Black	BK : Black	AL : Albalite Lens
GD : Gold	MO : Mocha	MO : Mocha	DR : Drop Opal Lens
HC : Haze Clear	CA : Cappuccino	CA : Cappuccino	CT : Frosted Clear Centre
CP : Champagne	SN : Satin Nickel	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	CH : Chrome	CH : Chrome	
MA : Matte Platinum	AN : Antique Nickel	AN : Antique Nickel	
	UN : Natural Steel	UN : Natural Steel	
	AC : Antique Copper	AC : Antique Copper	
	PB : Polished Brass	PB : Polished Brass	




AT196C

10" Reflector with Regressed Lens and Reflector Splay

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.
- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT196C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White	FR : Fresnel Lens
WH : White	BK : Black	BK : Black	AL : Albalite Lens
GD : Gold	MO : Mocha	MO : Mocha	DR : Drop Opal Lens
HC : Haze Clear	CA : Cappuccino	CA : Cappuccino	CT : Frosted Clear Centre
CP : Champagne	SN : Satin Nickel	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	CH : Chrome	CH : Chrome	
MA : Matte Platinum	AN : Antique Nickel	AN : Antique Nickel	
	UN : Natural Steel	UN : Natural Steel	
	AC : Antique Copper	AC : Antique Copper	
	PB : Polished Brass	PB : Polished Brass	

Example: AT196C-CL-CH-WH-FR




AT198

10" Reflector with Frosted Drop Lens

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector	Metal Trim Ring
AT198 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass




AT198S

10" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

- A21, 150W max.
- PAR38, 250W max.
- R40, 300W max.
- PS25, 300W max.

- LED PAR38



HOUSING

P. 79-81

Ordering Guide

Reflector	Metal Trim Ring
AT198S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass

Example: AT198S-CL-WH



The RF401LED-01-10 is a 4" 10W airtight LED housing for new construction applications. This fixture is suitable for insulated ceiling applications. The housing features a dimmable functionality.



RF401LED-01-10

4" New Construction LED Vertical Housing for Insulated Ceilings, 10W

Housing

Constructed of a single wall aluminum housing gasketed to provide an airtight solution for insulated ceiling applications. The housing can be adjusted for ceiling thicknesses up to 1-1/4" (32mm).

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. Pre-installed hanger bar tracks are provided for long-side mounting. A pre-installed set screw allows for positioning housing and fix in exact location.

Junction Box

1-1/2" x 5" x 3-1/2" #17ga galvanized steel. UL listed for a maximum of four no. 12 AWG 90°C through branch circuit conductions (two in and two out), the junction box includes five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp, a ground wire and quick connect push-in terminals.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height

during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

LED Module

A 10 watt single CREE® LED chip producing up to 600 lumens output from luminaire, operating at 700mA. The LED chip is available with an optional 3000K or 4000K correlated colour temperature (CCT). The module is provided with an advanced thermal management system via a heat sink and aluminum board to allow for low heat operation of high powered LED chip.

LED Driver

Class 2 constant current LED driver (700mA) is attached to the junction box. It allows for 100~1% dimming to the LED module. For use in 120V 60Hz power input (also available in 277V – consult factory).



Optional Accessories

- RLED-4-01-10-30 : 10W recessed LED engine only, 3000K
- RLED-4-01-10-40 : 10W recessed LED engine only, 4000K
- RLED-DVR-01-10W : 10W LED constant current driver only

Trim Options

See page 87

Dimensions

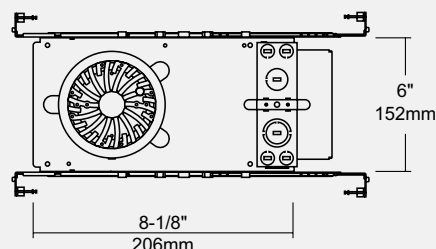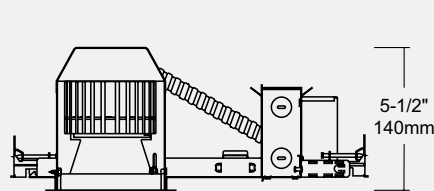

Icon Features



4-3/8"
111mm



120V
Line
Voltage



Electronic
Driver



Damp
Location



Dimmable
Fixture



C US

Ordering Guide

RF401LED-01-10	Colour Temp.
	30 : 3000K
	40 : 4000K

Example: RF401LED-01-10-40

Consult factory for more information on compatible dimmers.



The RF402LED-01-10 is a 4" 10W airtight LED housing for remodel applications. This fixture is suitable for insulated ceiling applications. The housing features a dimmable functionality.



RF402LED-01-10

4" Remodel LED Vertical Housing for Insulated Ceilings, 10W

Housing

Constructed of a single wall aluminum housing gasketed to provide an airtight solution for insulated ceiling applications.

Junction Box

1-1/2" x 5" x 3-1/2" #17ga galvanized steel. UL listed for a maximum of four no. 12 AWG 90°C through branch circuit conductors (two in and two out), the junction box includes five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp, a ground wire and quick connect push-in terminals.

Mounting Clips

Three pressure clips with locking tabs secure housing to ceiling. These clips accommodate 1/2" (13mm) to 5/8" (16mm) ceiling thicknesses.

LED Module

A 10 watt single CREE® LED chip producing up to 600 lumens output from luminaire, operating at 700mA. The LED chip is available with an optional 3000K or 4000K correlated colour temperature (CCT). The module is provided with an advanced thermal management system via a heat sink and aluminum board to allow for low heat operation of high powered LED chip.

LED Driver

Class 2 constant current LED driver (700mA) is attached to the junction box. It allows for 100~1% dimming to the LED module. For use in 120V 60Hz power input (also available in 277V – consult factory).



Optional Accessories

- RLED-4-01-10-30 : 10W recessed LED engine only, 3000K
- RLED-4-01-10-40 : 10W recessed LED engine only, 4000K
- RLED-DVR-01-10W : 10W LED constant current driver only

Trim Options

See page 87

Dimensions

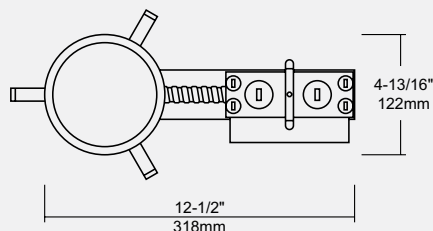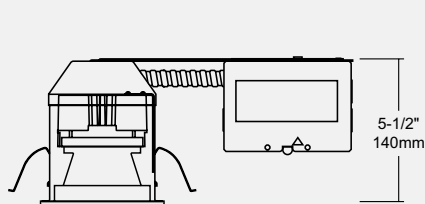

Icon Features



4-3/8"
111mm



Line
Voltage



Electronic
Driver



Damp
Location



Dimmable
Fixture



C US

Ordering Guide

RF402LED-01-10	Colour Temp
	30 : 3000K
	40 : 4000K

Example: RF402LED-01-10-30

Consult factory for more information on compatible dimmers.



RTML-224R

4" Reflector for LED Housings

Lamping Options

LED modules

Ordering Guide

RTML-224R

Beam Spread

N : Narrow (25°)

W : Wide (45°)

Reflector

CL : Clear


HC : Haze Clear

WH : White

Trim Ring

WH : White

BN : Brushed Nickel



Damp
Location



P. 85-86

Example: RTML-224R-N-CL-WH



The RF601LED-02-15 is a 6" 15W airtight LED housing for new construction applications. This fixture is suitable for insulated ceiling applications. The housing features a dimmable functionality. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.



RF601LED-02-15

6" New Construction LED Vertical Housing for Insulated Ceilings, 15W

Housing

Constructed of a single wall aluminum housing gasketed to provide an airtight solution for insulated ceiling applications. The housing can be adjusted for ceiling thickness up to 1-1/4" (32mm).

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to assist with drywall installations and standard ceilings. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

1-1/2" x 5" x 3-1/2" #17ga galvanized steel. UL listed for a maximum of four no. 12 AWG 90°C through branch circuit conductors (two in and two out), the junction box includes five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp, a ground wire and quick connect push-in terminals.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height

during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

LED Module

A 15 watt multi CREE® LED chip producing up to 750 lumens output from luminaire, operating at 700mA. The LED chips are available with an optional 3000K or 4000K correlated colour temperature (CCT). The module is provided with an advanced thermal management system via a heat sink and aluminum board to allow for low heat operation of high powered LED chip.

LED Driver

Class 2 constant current LED driver (700mA) is attached to the junction box. It allows for 100~1% dimming to the LED module. For use in 120V 60Hz power input (also available in 277V – consult factory).



Optional Accessories

- RLED-6-02-15-30 : 15W recessed LED chip only, 3000K
- RLED-6-02-15-40 : 15W recessed LED chip only, 4000K
- RLED-DVR-02-15W : 15W LED constant current driver only

Trim Options

See page 90

Dimensions

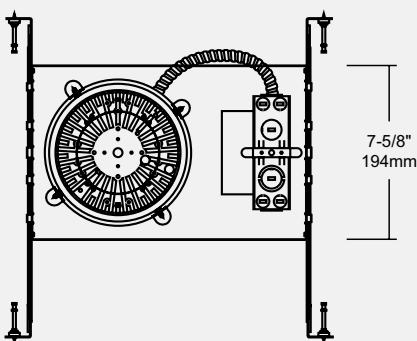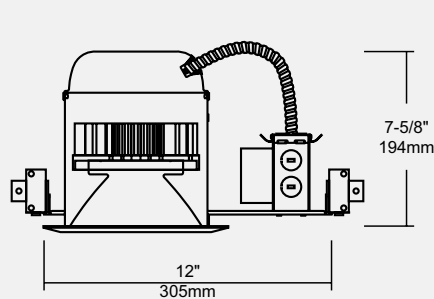

Icon Features



6-3/8"
162mm



120V
Line
Voltage



Electronic
Driver



Damp
Location



Dimmable
Fixture



CUS

Ordering Guide

RF601LED-02-15 - Colour Temp.
30 : 3000K
40 : 4000K

Example: RF601LED-02-15-40

Consult factory for more information on compatible dimmers.



The RF602LED-02-15 is a 6" 15W airtight LED housing for remodel applications. This fixture is suitable for insulated ceiling applications. The housing features a dimmable functionality.



RF602LED-02-15

6" Remodel LED Vertical Housing for Insulated Ceilings, 15W

Housing

Constructed of a single wall aluminum housing gasketed to provide an airtight solution for insulated ceiling applications. The housing can be adjusted for ceiling thickness up to 1-1/4" (32mm).

Junction Box

1-1/2" x 5" x 3-1/2" #17ga galvanized steel. UL listed for a maximum of four no. 12 AWG 90°C through branch circuit conductors (two in and two out), the junction box includes five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp, a ground wire and quick connect push-in terminals.

Mounting Clips

Four pressure clips with locking tabs secure housing to ceiling. These clips accommodate 1/2" (13mm) to 5/8" (16mm) ceiling thicknesses.

LED Module

A 15 watt multi CREE® LED chip producing up to 750 lumens output from luminaire, operating at 700mA. The LED chips are available with an optional 3000K or 4000K correlated colour temperature (CCT). The module is provided with an advanced thermal management system via a heat sink and aluminum

board to allow for low heat operation of high powered LED chip.

LED Driver

Class 2 constant current LED driver (700mA) is attached to the junction box. It allows for 100~1% dimming to the LED module. For use in 120V 60Hz power input (also available in 277V – consult factory).


Optional Accessories

- RLED-6-02-15-30 : 15W recessed LED chip only, 3000K
- RLED-6-02-15-40 : 15W recessed LED chip only, 4000K
- RLED-DVR-02-15W : 15W LED constant current driver only


Trim Options

See page 90

Dimensions

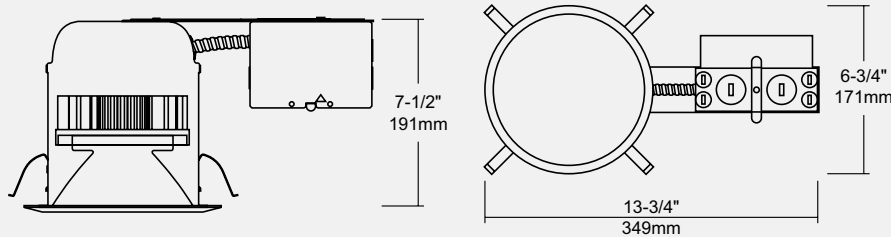

Icon Features

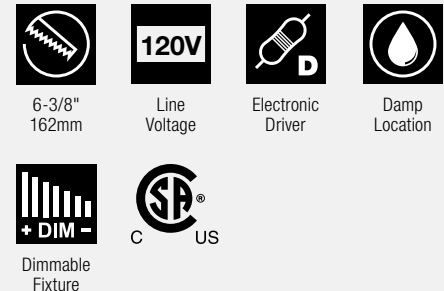

Ordering Guide

RF602LED-02-15	Colour Temp.
	30 : 3000K
	40 : 4000K

Example: RF602LED-02-15-30

Consult factory for more information on compatible dimmers.



RTML-14R


6" Reflector for LED Housings

Lamping Options

LED modules

Ordering Guide


	Reflector		Trim Ring
RTML-14R	-		-
	CL : Clear		WP : Plastic White
	HC : Haze Clear		
	WH : White		



Damp
Location



P. 88-89

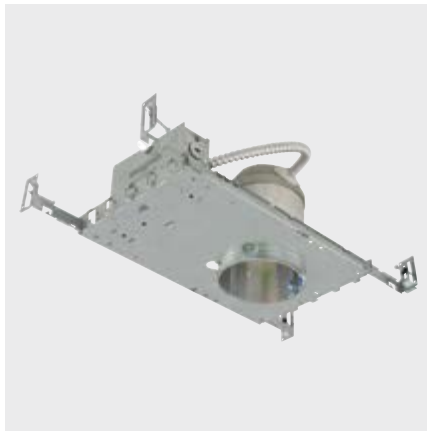

The A4101 is a 4" new construction housing designed for use in insulated ceilings. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A4101 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A4101

4" Aperture Airtight Vertical New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Gasketed housing allows for airtight installation. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 60°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor

(HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/Gx24q socket for use with 4-pin DTT and TTT lamps.


Lamping Options

- Compact Fluorescent
- DTT – Double Twin Tube (Quad/CFQ)
- * 1 × 13 watt (G24q-1)
- * 1 × 18 watt (G24q-2)
- TTT – Triple Twin Tube (CFTR)
- * 1 × 18 watt (GX24q-2)

Trim Options

See pages 94-96


Dimensions

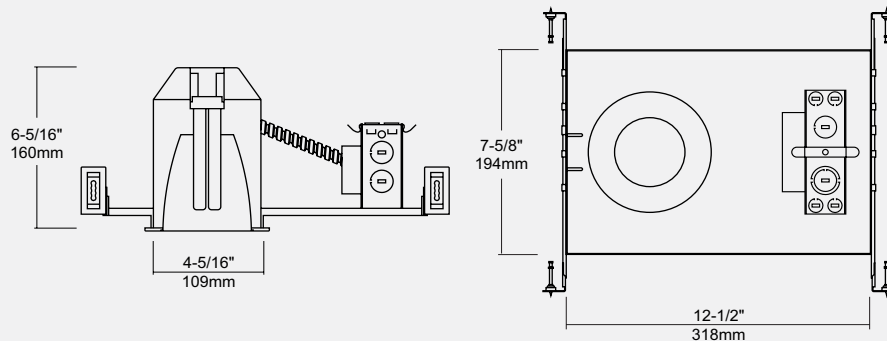

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 18W max.
- Triple Twin Tube (CFTR), 18W max.

Icon Features

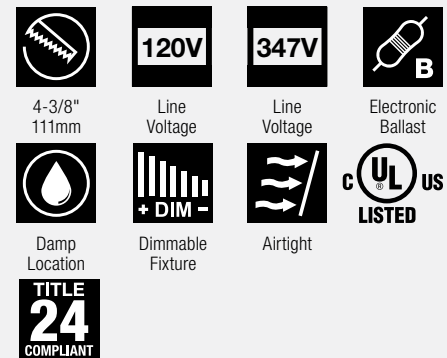

Ordering Guide

	Ballast Voltage	Lamp Wattage
A4101		
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	

Example: A4101-N120-13

Consult factory for more information on compatible dimmers.



The A4102 is a 4" remodel housing designed for use in insulated ceilings. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A4102 offers a wide choice of trim types including reflectors, lenses and wall wash trims.

A4102

4" Aperture Airtight Vertical Remodel Housing for Insulated Ceilings

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

- TTT – Triple Twin Tube (CFTR)
- * 1 × 18 watt (GX24q-2)

Trim Options

See pages 94-96

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket


It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)
- * 1 × 13 watt (G24q-1)
- * 1 × 18 watt (G24q-2)


Dimensions

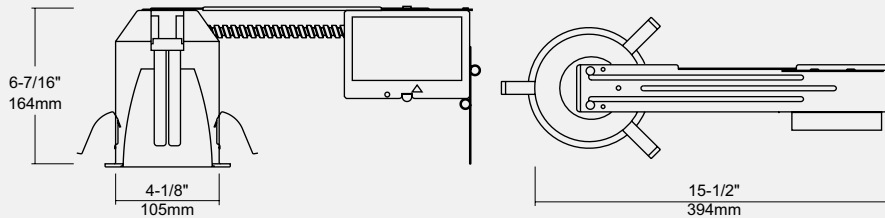

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 18W max.
- Triple Twin Tube (CFTR), 18W max.

Icon Features

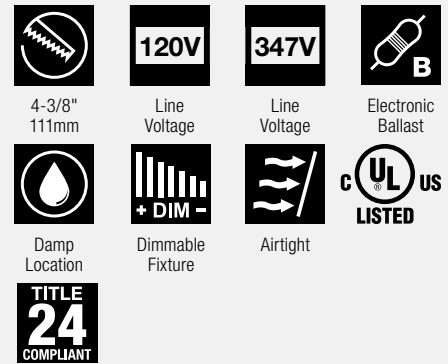


Ordering Guide

	Ballast Voltage	Lamp Wattage
A4102 -		
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	

Example: A4102-N120-13

Consult factory for more information on compatible dimmers.

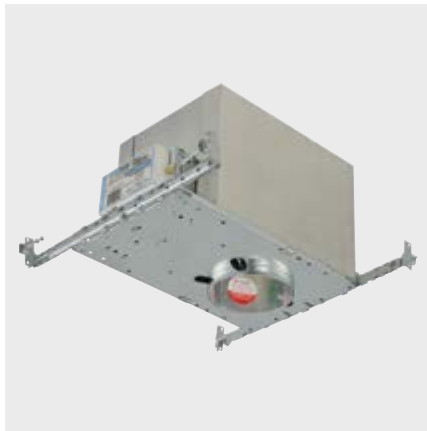

The A4105 is a 4" new construction housing designed for use insulated ceilings and can be in direct contact with ceiling insulation. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A4105 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A4105

4" Aperture Airtight Vertical New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum six no. 12 AWG 90°C branch-circuit conductors (three in and three out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic

ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options


Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)
- * 1 × 13 watt (G24q-1)
- * 1 × 18 watt (G24q-2)
- * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
- * 1 × 18 watt (GX24q-2)
- * 1 × 26 watt (GX24q-3)

Trim Options

See pages 94-96

Dimensions

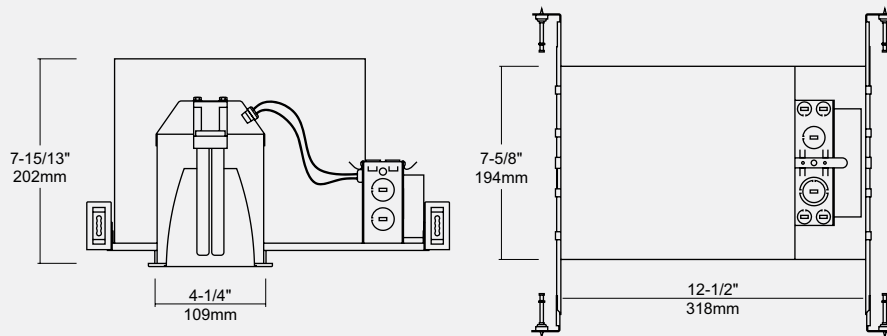

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 26W max.

Icon Features



Ordering Guide

A4105	Ballast Voltage	Lamp Wattage
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	26 : 1 × 26 watt

Example: A4105-N120-13

Consult factory for more information on compatible dimmers.




AT219R

4" Specular Reflector Cone

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]



HOUSING

P. 91-93

Ordering Guide

Reflector	Trim Ring
AT219R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT1215

4" Albalite Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Damp
Location

HOUSING

P. 91-93

Ordering Guide

Reflector	Trim Ring
AT1215 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT1217

4" Fresnel Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Damp
Location

HOUSING

P. 91-93

Ordering Guide

Reflector	Trim Ring
AT1217 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel

Example: AT1217-CL-WH




AT1218

4" Convex Prismatic Lens in Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT1218 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



Damp Location

P. 91-93




AT225B

4" Wall Wash with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Ordering Guide

Baffle	Metal Trim Ring
AT225B - <input type="text"/>	<input type="text"/>
WH : White	WH : White
BK : Black	BK : Black
SN : Satin Nickel	SN : Satin Nickel
AN : Antique Nickel	AN : Antique Nickel
AC : Antique Copper	AC : Antique Copper
MO : Mocha	MO : Mocha
CA : Cappuccino	CA : Cappuccino
CH : Chrome	CH : Chrome
UN : Natural Steel	UN : Natural Steel
PB : Polished Brass	PB : Polished Brass



P. 91-93




AT214B

4" Full Baffle with Torsion Springs

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Ordering Guide

Baffle	Trim Ring
AT214B - <input type="text"/>	<input type="text"/>
WH : White	WP : White Plastic
BK : Black	BP : Black Plastic
SN : Satin Nickel	WH : White
AN : Antique Nickel	BK : Black
AC : Antique Copper	SN : Satin Nickel
MO : Mocha	AN : Antique Nickel
CA : Cappuccino	AC : Antique Copper
CH : Chrome	MO : Mocha
UN : Natural Steel	CA : Cappuccino
PB : Polished Brass	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



P. 91-93

Example: AT214B-WH-BK-WH



AT1216

4" Shower Drop Opal Lens


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 18W (GX24q-2) [TTT]

Ordering Guide

Reflector	Metal Trim Ring
AT1216 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 91-93



AT1209

4" Convex Frosted Lens in Reflector


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 18W (GX24q-2) [TTT]

Ordering Guide

Reflector	Metal Trim Ring
AT1209 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 91-93



AT225C-A

4" Wall Wash with Reflector

Lamping Options


Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]

- 1 × 18W (GX24q-2) [TTT]

Ordering Guide

Reflector	Metal Trim Ring
AT225C-A - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 91-93

Example: AT225C-CL-WH



The A5101 is a 5" new construction housing designed for use in insulated ceilings. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A5101 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A5101

5" Aperture Airtight Vertical New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor

(HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.


Lamping Options

- Compact Fluorescent
- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 × 13 watt (G24q-1)
 - * 1 × 18 watt (G24q-2)
 - TTT – Triple Twin Tube (CFTR)
 - * 1 × 13 watt (GX24q-1)
 - * 1 × 18 watt (GX24q-2)

Trim Options

See pages 99-101

Dimensions

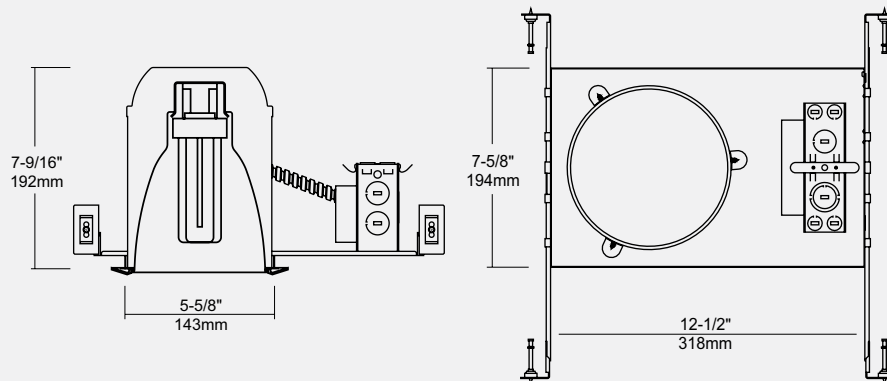

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 18W max.
- Triple Twin Tube (CFTR), 18W max.

Icon Features



Ordering Guide

	Ballast Voltage	Lamp Wattage
A5101 -		
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	

Example: A5101-N120-13

Consult factory for more information on compatible dimmers.



The A5102 is a 5" remodel housing designed for use in insulated ceilings. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A5102 offers a wide choice of trim types including reflectors, lenses and wall wash trims.

A5102

5" Aperture Airtight Vertical Remodel Housing for Insulated Ceilings

Junction Box

Listed for through branch circuit wiring. Maximum six no. 12 AWG 90°C branch-circuit conductors (three in and three out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

- TTT – Triple Twin Tube (CFTR)


* 1 × 13 watt (GX24q-1)

* 1 × 18 watt (GX24q-2)

Trim Options

See pages 99-101

Dimensions

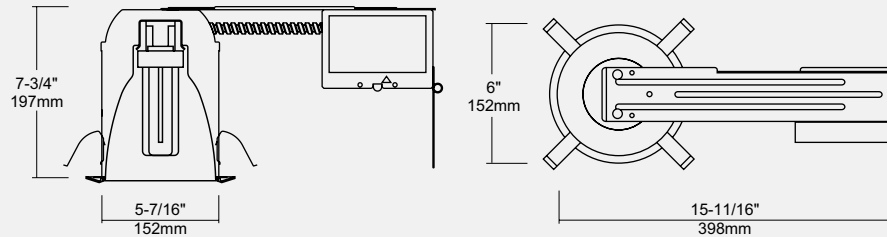

Compatible Lamps

Double Twin Tube (Quad/CFQ), 18W max.

Triple Twin Tube (CFTR), 18W max.

Icon Features



Ordering Guide

	Ballast Voltage	Lamp Wattage
A5102 -		
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	

Example: A5102-N120-13

Consult factory for more information on compatible dimmers.



AT59R-A


5" Specular Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



HOUSING

P. 97-98

Ordering Guide

Reflector	Trim Ring
AT59R-A - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



AT57-A-AL


5" Albalite Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]




Damp
Location

HOUSING

P. 97-98

Ordering Guide

Reflector	Trim Ring
AT57-A-AL - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

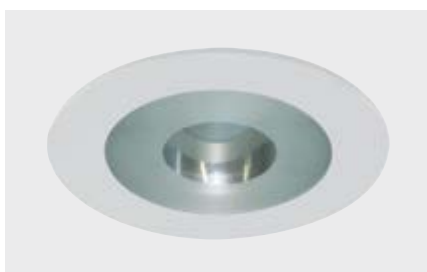

AT57-A-CT


5" Frosted Clear Centre Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



Damp
Location

HOUSING

P. 97-98

Ordering Guide

Reflector	Trim Ring
AT57-A-CT - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT57-A-CT-CL-WH



AT255C-A


5" Decorative Frosted Glass with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



HOUSING

P. 97-98

Ordering Guide

Reflector	Metal Trim Ring
AT255C-A -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



AT255B-A


5" Decorative Frosted Glass with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



HOUSING

P. 97-98

Ordering Guide

Baffle	Metal Trim Ring
AT255B-A -	
WH : White	WH : White
BK : Black	BK : Black
SN : Satin Nickel	SN : Satin Nickel
AN : Antique Nickel	AN : Antique Nickel
AC : Antique Copper	AC : Antique Copper
MO : Mocha	MO : Mocha
CA : Cappuccino	CA : Cappuccino
CH : Chrome	CH : Chrome
UN : Natural Steel	UN : Natural Steel
PB : Polished Brass	PB : Polished Brass



AT115-A


5" Baffle with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



HOUSING

P. 97-98

Ordering Guide

Reflector	Baffle	Trim Ring
AT115-A -		
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
	PB : Polished Brass	UN : Natural Steel
		PB : Polished Brass

Example: AT115-A-CL-BK-BP



AT56-A



5" Round Opal Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



Damp
Location

P. 97-98

Ordering Guide

AT56-A -

Reflector

CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

Trim Ring

WP : White Plastic
BP : Black Plastic
WH : White
BK : Black
SN : Satin Nickel
AN : Antique Nickel
AC : Antique Copper
MO : Mocha
CA : Cappuccino
CH : Chrome
UN : Natural Steel
PB : Polished Brass



AT57-A-FR


5" Fresnel Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



Damp
Location

P. 97-98

Ordering Guide

AT57-A-FR -

Reflector

CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

Trim Ring

WP : White Plastic
BP : Black Plastic
WH : White
BK : Black
SN : Satin Nickel
AN : Antique Nickel
AC : Antique Copper
MO : Mocha
CA : Cappuccino
CH : Chrome
UN : Natural Steel
PB : Polished Brass



AT57-A-DO


5" Drop Opal Lens in Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 13W (GX24q-1) [TTT]

- 1 × 18W (GX24q-2) [TTT]



Damp
Location

P. 97-98

Ordering Guide

AT57-A-DO -


Reflector

CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

Trim Ring

WP : White Plastic
BP : Black Plastic
WH : White
BK : Black
SN : Satin Nickel
AN : Antique Nickel
AC : Antique Copper
MO : Mocha
CA : Cappuccino
CH : Chrome
UN : Natural Steel
PB : Polished Brass

Example: AT57-A-DO-CL-WH

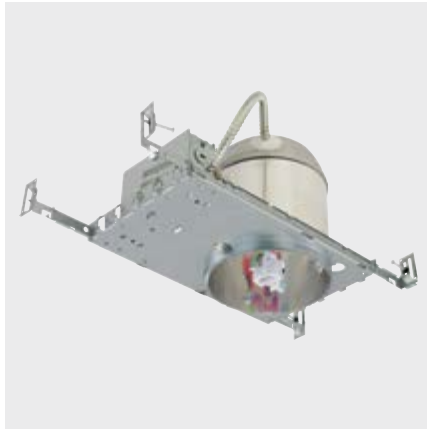

The A6101 is a 6" new construction housing designed for use in insulated ceilings. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A6101 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6101

6" Aperture Airtight Vertical New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum six no. 12 AWG 90°C branch-circuit conductors (three in and three out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor

(HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options


Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 × 13 watt (G24q-1)
 - * 1 × 18 watt (G24q-2)
 - * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 1 × 18 watt (GX24q-2)
 - * 1 × 26 watt (GX24q-3)

Trim Options

See pages 104-108

Dimensions

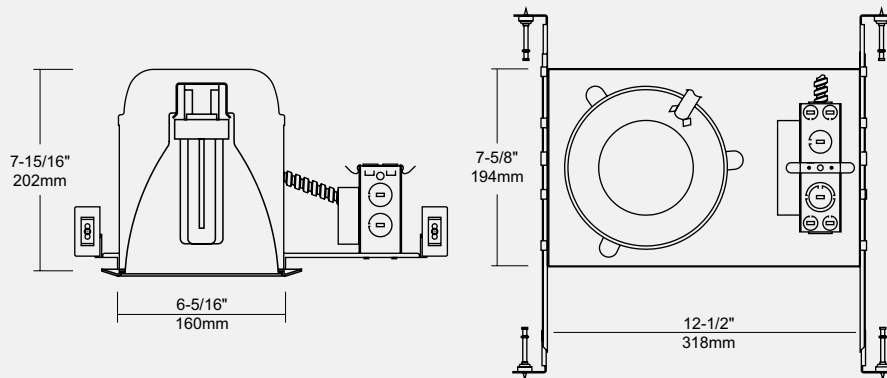

Compatible Lamps

- ◀ Double Twin Tube (Quad/CFQ), 26W max.
- ◀ Triple Twin Tube (CFTR), 26W max.

Icon Features



Ordering Guide

	Ballast Voltage	Lamp Wattage
A6101	-	-
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	26 : 1 × 26 watt

Example: A6101-N120-13

Consult factory for more information on compatible dimmers.



The A6102 is a 6" remodel housing designed for use in insulated ceilings. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A6102 offers a wide choice of trim types including reflectors, lenses and wall wash trims.

A6102

6" Aperture Airtight Vertical Remodel Housing for Insulated Ceilings

Junction Box

Listed for through branch circuit wiring. Maximum six no. 12 AWG 90°C branch-circuit conductors (three in and three out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Class P thermally protected electronic ballast, 120V Normal Power Factor (NPF); or 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

- TTT – Triple Twin Tube (CFTR)

* 1 × 13 watt (GX24q-1)


* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)

Trim Options

See pages 104-108

Dimensions

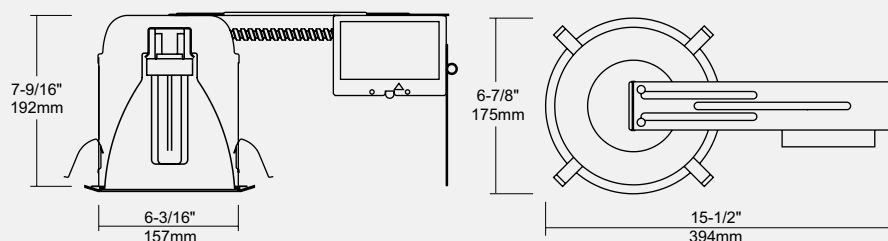

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 26W max.

Icon Features



6-3/8"
162mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



Airtight



UL
LISTED



TITLE
24
COMPLIANT

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6102	-	-
	N120 : 120V NPF	13 : 1 × 13 watt
	H120 : 120V HPF	18 : 1 × 18 watt
	H347 : 347V HPF	26 : 1 × 26 watt

Example: A6102-N120-13

Consult factory for more information on compatible dimmers.




AT109R-A

6" Specular Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]



HOUSING

P. 102-103

Ordering Guide

Reflector	Trim Ring
AT109R-A -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT16-A

6" Shower Drop Opal Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Damp
Location

HOUSING

P. 102-103

Ordering Guide

Reflector	Metal Trim Ring
AT16-A -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass
	MO : Mocha
	CA : Cappuccino
	CH : Chrome




AT16P-A

6" Shower Drop Opal Lens with Lexan® Trim Ring

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Damp
Location


HOUSING

P. 102-103

Ordering Guide

Reflector	Lexan® Trim Ring
AT16P-A -	
CL : Clear	WH : White
WH : White	
GD : Gold	
HC : Haze Clear	
CP : Champagne	
OR : Pewter	
MA : Matte Platinum	

Example: AT16P-A-CL-WH

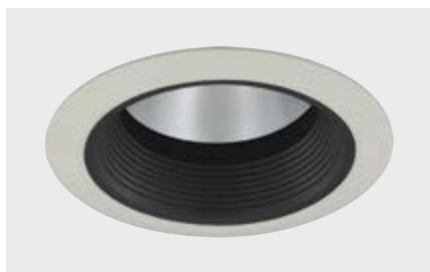


AT11-A

6" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]



Ordering Guide

Reflector	Baffle	Trim Ring
AT11-A -		
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		
	WP : White Plastic	AC : Antique Copper
	BP : Black Plastic	MO : Mocha
	WH : White	CA : Cappuccino
	BK : Black	CH : Chrome
	SN : Satin Nickel	UN : Natural Steel
	AN : Antique Nickel	PB : Polished Brass



P. 102-103




AT1916C-A

6" Lens in Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



Ordering Guide

Reflector	Trim Ring	Lens Type
AT1916C-A -		
CL : Clear	WP : White Plastic	AC : Antique Copper
WH : White	BP : Black Plastic	MO : Mocha
GD : Gold	WH : White	CA : Cappuccino
HC : Haze Clear	BK : Black	CH : Chrome
CP : Champagne	SN : Satin Nickel	UN : Natural Steel
OR : Pewter	AN : Antique Nickel	PB : Polished Brass
MA : Matte Platinum		
	FR : Fresnel Lens	
	AL : Albalite Lens	
	DR : Drop Opal Lens	
	CT : Frosted Clear Centre	
	SPL : Comfort Linear	



P. 102-103




AT1917-A

6" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]



Ordering Guide

Reflector	Trim Ring
AT1917-A -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel



P. 102-103

Example: AT1917-A-CL-WH



AT15-A


6" Fresnel Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]

- 1 × 18W (GX24q-2) [TTT]



Damp
Location



P. 102-103

Ordering Guide

Reflector	Trim Ring
AT15-A - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



AT15P-A


6" Fresnel Lens with Reflector and Lexan® Trim Ring

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]

- 1 × 18W (GX24q-2) [TTT]




Damp
Location



P. 102-103

Ordering Guide

Reflector	Lexan® Trim Ring
AT15P-A - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	
GD : Gold	
HC : Haze Clear	
CP : Champagne	
OR : Pewter	
MA : Matte Platinum	

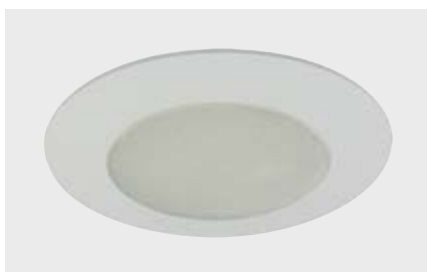

AT17-A


6" Albalite Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]

- 1 × 18W (GX24q-2) [TTT]



Damp
Location



P. 102-103

Ordering Guide

Reflector	Metal Trim Ring
AT17-A - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT17-A-WH-WH




AT17P-A

6" Albalite Lens with Reflector and Lexan® Trim Ring

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



P. 102-103

Ordering Guide

AT17P-A - **Reflector** - **Lexan® Trim Ring**

CL : Clear

WH : White

GD : Gold

HC : Haze Clear

CP : Champagne

OR : Pewter

MA : Matte Platinum

WH : White




AT1916B-A

6" Fresnel Lens with Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]



P. 102-103

Ordering Guide

AT1916B-A - **Reflector** - **Baffle** - **Trim Ring**

CL : Clear

WH : White

GD : Gold

HC : Haze Clear

CP : Champagne

OR : Pewter

MA : Matte Platinum

WH : White

BK : Black

SN : Satin Nickel

AN : Antique Nickel

AC : Antique Copper

MO : Mocha

CA : Cappuccino

CH : Chrome

UN : Natural Steel

PB : Polished Brass

WP : White Plastic

BP : Black Plastic

WH : White

BK : Black

SN : Satin Nickel

AN : Antique Nickel

AC : Antique Copper

MO : Mocha

CA : Cappuccino

CH : Chrome

UN : Natural Steel

PB : Polished Brass




AT102-A-SP

6" Full Baffle with Torsion Springs

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]



P. 102-103

Ordering Guide

AT102-A-SP - **Baffle** - **Trim Ring**

WH : White

BK : Black

SN : Satin Nickel

AN : Antique Nickel

AC : Antique Copper

MO : Mocha

CA : Cappuccino

CH : Chrome

UN : Natural Steel

PB : Polished Brass

WP : White Plastic

BP : Black Plastic

WH : White

BK : Black

SN : Satin Nickel

AN : Antique Nickel

AC : Antique Copper

MO : Mocha

CA : Cappuccino

CH : Chrome

UN : Natural Steel

PB : Polished Brass

Example: AT102-A-SP-WH-WP




AT102F-A-SP

6" Full Self-Flanged Baffle with Torsion Springs

Lamping Options

- Compact Fluorescent
- 1 × 13W (G24q-1) [DTT]
 - 1 × 18W (G24q-2) [DTT]
 - 1 × 26W (G24q-3) [DTT]



Ordering Guide

AT102F-A-SP -	Baffle
WH : White	MO : Mocha
BK : Black	CA : Cappuccino
SN : Satin Nickel	CH : Chrome
AN : Antique Nickel	UN : Natural Steel
AC : Antique Copper	PB : Polished Brass



P. 102-103




AT1054-A

6" Reflector with Wall Wash

Lamping Options

- Compact Fluorescent
- 1 × 13W (G24q-1) [DTT]
 - 1 × 18W (G24q-2) [DTT]
 - 1 × 26W (G24q-3) [DTT]




Ordering Guide

AT1054-A -	Reflector	Trim Ring
CL : Clear	WP : White Plastic	AC : Antique Copper
WH : White	BP : Black Plastic	MO : Mocha
GD : Gold	WH : White	CA : Cappuccino
HC : Haze Clear	BK : Black	CH : Chrome
CP : Champagne	SN : Satin Nickel	UN : Natural Steel
OR : Pewter	AN : Antique Nickel	PB : Polished Brass
MA : Matte Platinum		



P. 102-103

Example: AT1054-A-CL-WH

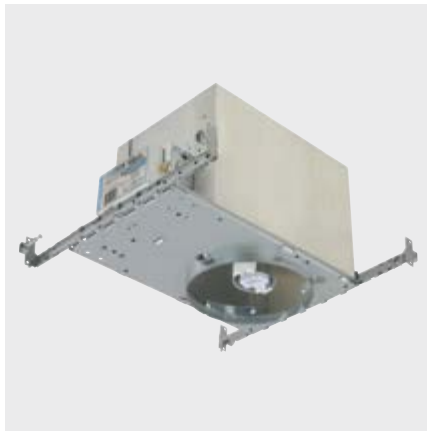

The A6111 is a 6" new construction housing designed for use in insulated ceilings and can be in direct contact with ceiling insulation. This airtight housing design prevents airflow through the ceiling to save heating and air conditioning costs. The A6111 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6111

6" Aperture Airtight Vertical New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated

lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)


* 1 × 32 watt (GX24q-3)

* 1 × 42 watt (GX24q-4)

Trim Options

See pages 110-112

Dimensions

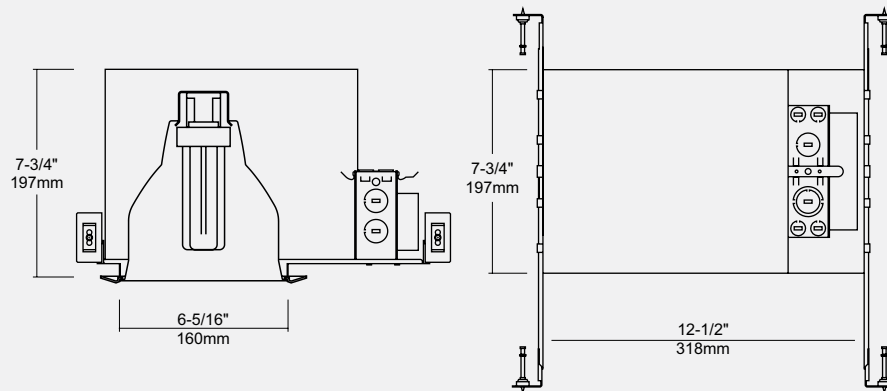

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 42W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



Dimmable
Fixture



Airtight



UL LISTED



Ordering Guide

	Ballast Voltage	Lamp Wattage
A6111	-	-
	H120 : 120V HPF	13 : 1 × 13 watt
	H347 : 347V HPF	18 : 1 × 18 watt
		26 : 1 × 26 watt
		32 : 1 × 32 watt
		42 : 1 × 42 watt

Example: A6111-H120-13

Consult factory for more information on compatible dimmers.




AT106R-A

6" Specular Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 109

Ordering Guide

Reflector	Trim Ring
AT106R-A - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT106RF-A

6" Specular Self-Flanged Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 109

Ordering Guide

Reflector
AT106RF-A - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT165B-A

6" Baffle with Convex Frosted Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 109

Ordering Guide

Reflector	Baffle	Trim Ring
AT165B-A - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel

Example: AT165B-A-CL-BK-WH




AT165C-A

6" Reflector with Convex Frosted Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Reflector Splay	Trim Ring
AT165C-A -	-	-
CL : Clear	CL : Clear	WP : White Plastic
WH : White	WH : White	BP : Black Plastic
GD : Gold	GD : Gold	WH : White
HC : Haze Clear	HC : Haze Clear	BK : Black
CP : Champagne	CP : Champagne	SN : Satin Nickel
OR : Pewter	OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	MA : Matte Platinum	AC : Antique Copper
		MO : Mocha
		CA : Cappuccino
		CH : Chrome
		UN : Natural Steel
		PB : Polished Brass



P. 109




AT164B-A

6" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Baffle	Trim Ring
AT164B-A -	-	-
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		WP : White Plastic
MA : Matte Platinum		BP : Black Plastic
		WH : White
		BK : Black
		SN : Satin Nickel
		AN : Antique Nickel
		AC : Antique Copper
		MO : Mocha
		CA : Cappuccino
		CH : Chrome
		UN : Natural Steel
		PB : Polished Brass



P. 109




AT163-A

6" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT163-A -	-
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel



P. 109

Example: AT163-A-CL-WH



AT1154-A

6" Reflector with Wall Wash Plate


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]

Ordering Guide

	Reflector	Trim Ring
AT1154-A -		
CL : Clear		WP : White Plastic
WH : White		BP : Black Plastic
GD : Gold		WH : White
HC : Haze Clear		BK : Black
CP : Champagne		SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		AC : Antique Copper
		MO : Mocha
		CA : Cappuccino
		CH : Chrome
		UN : Natural Steel
		PB : Polished Brass



P. 109



The A6201 is a 6" new construction housing for horizontal CFL lamp installation. The A6201 is designed for non-insulated ceilings. The A6201 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6201

6" Horizontal New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and

starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 2 × 13 watt (G24q-1)

* 2 × 18 watt (G24q-2)

* 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 26 watt (GX24q-3)


* 1 × 32 watt (GX24q-3)

Trim Options

See pages 117-121

NOT FOR USE IN INSULATED CEILINGS

Dimensions

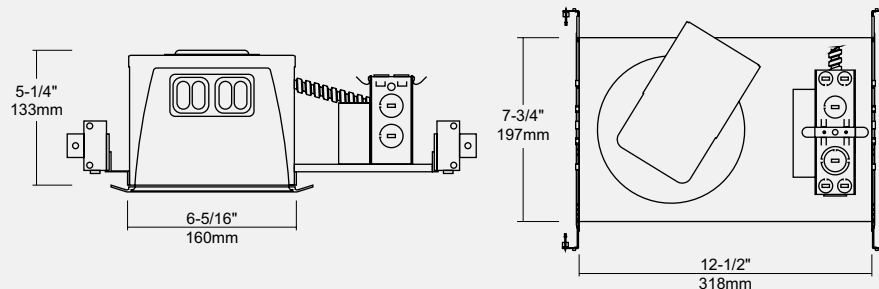

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 32W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



Dimmable
Fixture



UL US
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6201 -		
	H120 : 120V HPF	126 : 1 × 26 watt
	H347 : 347V HPF	132 : 1 × 32 watt
		213 : 2 × 13 watt
		218 : 2 × 18 watt
		226 : 2 × 26 watt

Example: A6201-H120-213

Consult factory for more information on compatible dimmers.



The A6201S is a 6" shallow new construction housing for horizontal CFL lamps. The A6201S is designed for non-insulated ceilings. The A6201S offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

NOT FOR USE IN INSULATED CEILINGS

A6201S

6" Shallow Horizontal New Construction Housing

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and

starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 2 × 13 watt (G24q-1)

* 2 × 18 watt (G24q-2)

* 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 26 watt (GX24q-3)


* 1 × 32 watt (GX24q-3)

Trim Options

Compatible only with AT693R trim.

See page 121

Dimensions

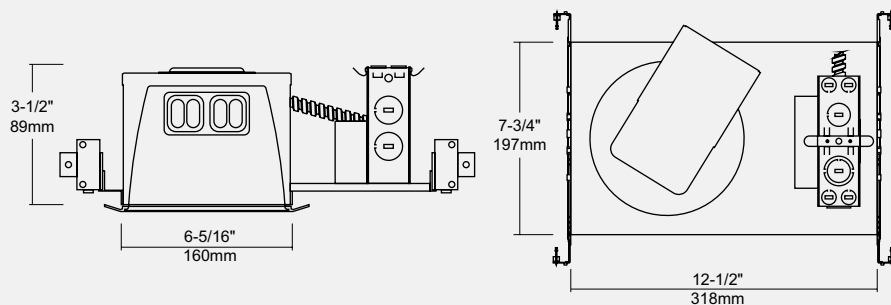

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 32W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



Dimmable
Fixture



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6201S	-	-
	H120 : 120V HPF	126 : 1 × 26 watt
	H347 : 347V HPF	132 : 1 × 32 watt
		213 : 2 × 13 watt
		218 : 2 × 18 watt
		226 : 2 × 26 watt

Example: A6201S-H120-126

Consult factory for more information on compatible dimmers.



The A6202 is a 6" remodel housing for horizontal CFL lamps. The A6202 is designed for non-insulated existing ceilings. The A6202 offers a wide choice of trim types including reflectors, lenses and wall wash trims.

A6202

6" Horizontal Remodel Housing

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Class P thermally protected electronic ballast, 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options

Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)

* 2 × 13 watt (G24q-1)

* 2 × 18 watt (G24q-2)

* 2 × 26 watt (G24q-3)

- TTT – Triple Twin Tube (CFTR)

* 1 × 26 watt (GX24q-3)


* 1 × 32 watt (GX24q-3)

Trim Options

See pages 117-121

NOT FOR USE IN INSULATED CEILINGS

Dimensions

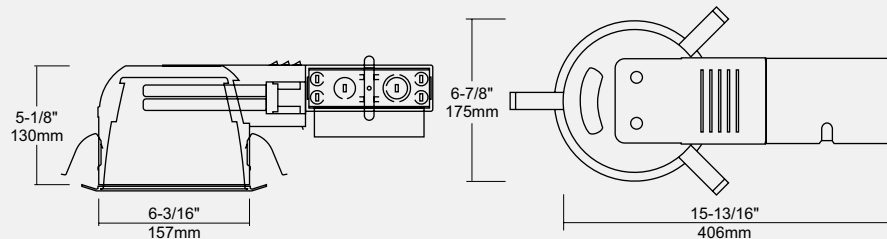

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 32W max.

Icon Features



6-5/8"
168mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



Dimmable
Fixture



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6202 -		
	H120 : 120V HPF	126 : 1 × 26 watt
	H347 : 347V HPF	132 : 1 × 32 watt
		213 : 2 × 13 watt
		218 : 2 × 18 watt
		226 : 2 × 26 watt

Example: A6202-H347-226

Consult factory for more information on compatible dimmers.



The A6205 is a 6" new construction housing for horizontal CFL lamps. The A6205 is designed for use in insulated ceilings and can be in direct contact with ceiling insulation. The A6205 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6205

6" Horizontal New Construction Housing for Insulated Ceilings

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar to provide a perfect fit with the ceiling hole. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Class P thermally protected electronic ballast, 120 or 347V High Power Factor (HPF). 120V electronic ballast dimmable 100~0%. Electronic ballast provides full light output and rated

lamp life. Provides flicker-free and noise-free operation and starting. End of lamp life protection is standard. Meets FCC EMT/RFI consumer level limits.

Socket Cup/Socket

It accommodates a G24q/GX24q socket for use with 4-pin DTT and TTT lamps.

Lamping Options


Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)
 - * 2 × 13 watt (G24q-1)
 - * 2 × 18 watt (G24q-2)
- TTT – Triple Twin Tube (CFTR)
 - * 1 × 26 watt (GX24q-3)
 - * 1 × 32 watt (GX24q-3)

Trim Options

See pages 117-121


Dimensions

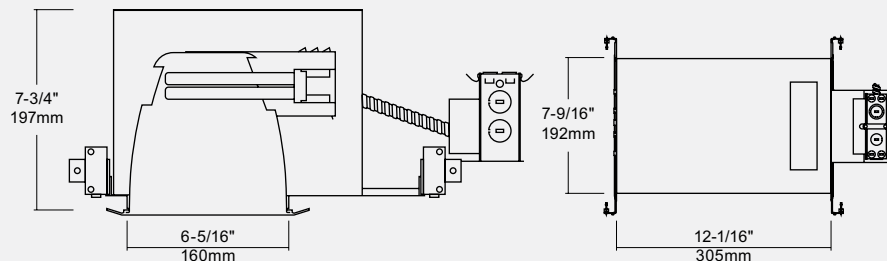

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 18W max.
- Triple Twin Tube (CFTR), 32W max.

Icon Features

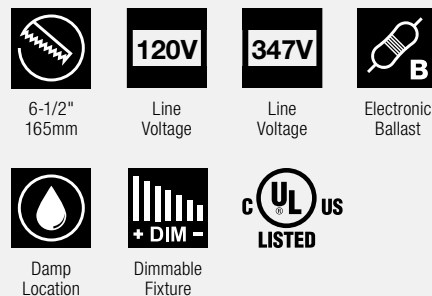

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6205	-	-
	H120 : 120V HPF	213 : 2 × 13 watt
	H347 : 347V HPF	218 : 2 × 18 watt
		126 : 1 × 26 watt
		132 : 1 × 32 watt

Example: A6205-H120-218

Consult factory for more information on compatible dimmers.




AT69R

6" Specular Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]



HOUSING

P. 113-116

Ordering Guide

Reflector	Trim Ring
AT69R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT69RF

6" Specular Self-Flanged Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]



HOUSING

P. 113-116

Ordering Guide

Reflector
AT69RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT69RT

6" Specular Reflector

Lamping Options

Compact Fluorescent

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



HOUSING

P. 113-116

Ordering Guide

Reflector	Trim Ring
AT69RT - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel

Example: AT69RT-WH-CH



AT5

6" Shower Fresnel Lens


Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]

Ordering Guide

AT5 -	Trim Ring
WP : White Plastic	AC : Antique Copper
BP : Black Plastic	MO : Mocha
WH : White	CA : Cappuccino
BK : Black	CH : Chrome
SN : Satin Nickel	UN : Natural Steel
AN : Antique Nickel	PB : Polished Brass



Damp Location

P. 113-116



AT5P

6" Shower Fresnel Lens with Lexan® Trim Ring


Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]

Ordering Guide

AT5P -	Lexan® Trim Ring
WH : White	



Damp Location

P. 113-116



AT6

6" Shower Drop Opal


Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]

Ordering Guide

AT6 -	Trim Ring
WP : White Plastic	AC : Antique Copper
BP : Black Plastic	MO : Mocha
WH : White	CA : Cappuccino
BK : Black	CH : Chrome
SN : Satin Nickel	UN : Natural Steel
AN : Antique Nickel	PB : Polished Brass



Damp Location

P. 113-116

Example: AT6-WP




AT6P

6" Shower Drop Opal with Lexan® Trim Ring

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



Damp Location

P. 113-116

Ordering Guide

AT6P - Lexan® Trim Ring
WH : White




AT7

6" Shower Albalite Lens

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



Damp Location

P. 113-116

Ordering Guide

AT7 - Trim Ring

WP : White Plastic	AC : Antique Copper
BP : Black Plastic	MO : Mocha
WH : White	CA : Cappuccino
BK : Black	CH : Chrome
SN : Satin Nickel	UN : Natural Steel
AN : Antique Nickel	PB : Polished Brass




AT7P

6" Shower Albalite Lens with Lexan® Trim Ring

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



Damp Location

P. 113-116

Ordering Guide

AT7P - Lexan® Trim Ring
WH : White

Example: AT7P-WH



AT61


6" Reflector with Baffle

Lamping Options

- Compact Fluorescent
- 2 × 13W (G24q-1) [DTT]
 - 2 × 18W (G24q-2) [DTT]
 - 2 × 26W (G24q-3) [DTT]

Ordering Guide

Reflector	Baffle	Trim Ring
AT61 -		
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		



HOUSING

P. 113-116



AT42B


6" Baffle with Regressed Lens

Lamping Options

- Compact Fluorescent
- 2 × 13W (G24q-1) [DTT]
 - 2 × 18W (G24q-2) [DTT]
 - 2 × 26W (G24q-3) [DTT]
 - 1 × 26W (GX24q-3) [TTT]
 - 1 × 32W (GX24q-3) [TTT]

Ordering Guide

Baffle	Trim Ring	Lens Type
AT42B -		
WH : White	MO : Mocha	WP : White Plastic
BK : Black	CA : Cappuccino	BP : Black Plastic
SN : Satin Nickel	CH : Chrome	WH : White
AN : Antique Nickel	UN : Natural Steel	BK : Black
AC : Antique Copper	PB : Polished Brass	SN : Satin Nickel
		AN : Antique Nickel
		AC : Antique Copper
		MO : Mocha
		CA : Cappuccino
		CH : Chrome
		UN : Natural Steel
		PB : Polished Brass
		FR : Fresnel Lens
		AL : Albalite Lens
		DR : Drop Opal Lens
		CT : Frosted Clear Centre
		SPL : Comfort Linear



HOUSING

P. 113-116



AT42C


6" Reflector with Regressed Lens

Lamping Options

- Compact Fluorescent
- 2 × 13W (G24q-1) [DTT]
 - 2 × 18W (G24q-2) [DTT]
 - 2 × 26W (G24q-3) [DTT]
 - 1 × 26W (GX24q-3) [TTT]
 - 1 × 32W (GX24q-3) [TTT]

Ordering Guide

Reflector	Trim Ring	Lens Type
AT42C -		
CL : Clear	WP : White Plastic	AC : Antique Copper
WH : White	BP : Black Plastic	MO : Mocha
GD : Gold	WH : White	CA : Cappuccino
HC : Haze Clear	BK : Black	CH : Chrome
CP : Champagne	SN : Satin Nickel	UN : Natural Steel
OR : Pewter	AN : Antique Nickel	PB : Polished Brass
MA : Matte Platinum		
		FR : Fresnel Lens
		AL : Albalite Lens
		DR : Drop Opal Lens
		CT : Frosted Clear Centre
		SPL : Comfort Linear



HOUSING

P. 113-116

Example: AT42C-CL-WH-FR




AT49B

6" Baffle with Regressed Lens

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



HOUSING

P. 113-116

Ordering Guide

AT49B -	Baffle	-	Trim Ring	-	Lens Type
	WH : White BK : Black SN : Satin Nickel AN : Antique Nickel AC : Antique Copper		MO : Mocha CA : Cappuccino CH : Chrome UN : Natural Steel PB : Polished Brass		WP : White Plastic BP : Black Plastic WH : White BK : Black SN : Satin Nickel AN : Antique Nickel
			AC : Antique Copper MO : Mocha CA : Cappuccino CH : Chrome UN : Natural Steel PB : Polished Brass		FR : Fresnel Lens AL : Albalite Lens DR : Drop Opal Lens CT : Frosted Clear Centre SPL : Comfort Linear




AT654

6" Wall Wash with Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]




HOUSING

P. 113-116

Ordering Guide

AT654 -	Reflector	-	Trim Ring
	CL : Clear WH : White GD : Gold HC : Haze Clear CP : Champagne OR : Pewter MA : Matte Platinum		WP : White Plastic BP : Black Plastic WH : White BK : Black SN : Satin Nickel AN : Antique Nickel
			AC : Antique Copper MO : Mocha CA : Cappuccino CH : Chrome UN : Natural Steel PB : Polished Brass

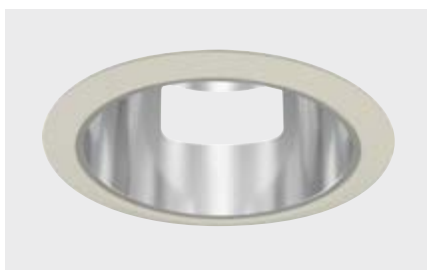


AT693R

6" Wall Wash with Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]



HOUSING

P. 114

Ordering Guide

AT693R -	Reflector	-	Trim Ring
	CL : Clear		WP : White Plastic

Example: AT693R-CL-WP



The A4301 is a 4" aperture flat frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A4301

4" Flat Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)


* 1 × 32 watt (GX24q-3)

Trim Options

See pages 125-127

NOT FOR USE IN INSULATED CEILINGS

Dimensions

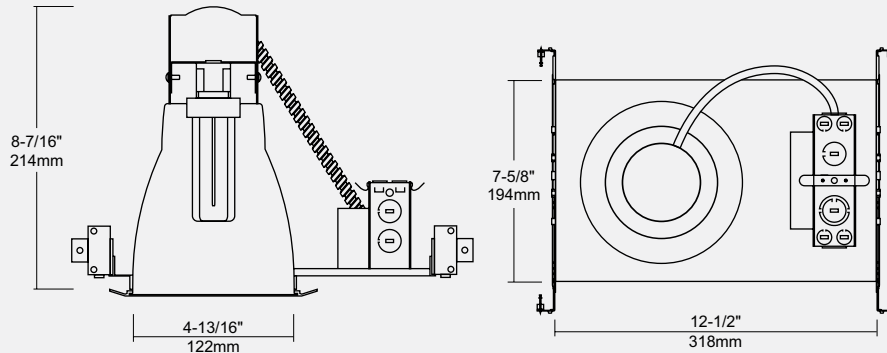

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 32W max.

Icon Features



5"
127mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



US
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A4301 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	

Example: A4301-H120-26

Consult factory for more information on compatible dimmers.



The A4302 is a 4" aperture remodeling frame-in kit for vertical CFL lamps. The A4302 is designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types.

NOT FOR USE IN INSULATED CEILINGS

A4302

4" Remodel Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
- * 1 × 13 watt (G24q-1)

- * 1 × 18 watt (G24q-2)
- * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
- * 1 × 18 watt (GX24q-2)
- * 1 × 26 watt (GX24q-3)
- * 1 × 32 watt (GX24q-3)

Trim Options

See pages 125-127


Dimensions

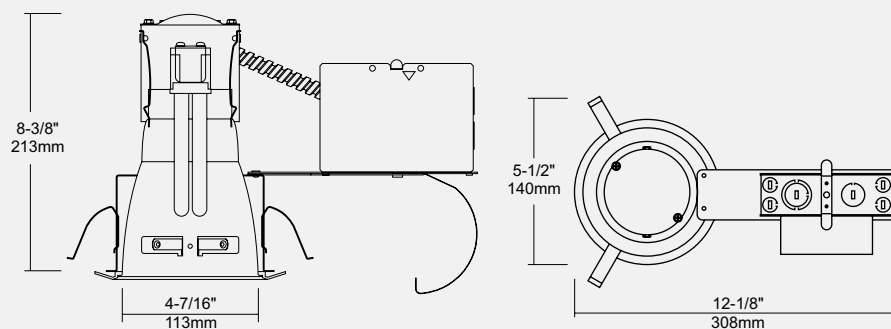

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 32W max.

Icon Features

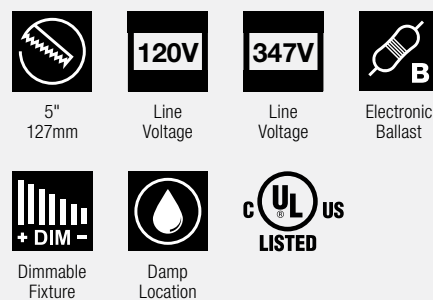

Ordering Guide

A4302	Ballast Voltage	Lamp Wattage
	H120 : 120V HPF	13 : 1 × 13 watt
	H347 : 347V HPF	18 : 1 × 18 watt
		26 : 1 × 26 watt
		32 : 1 × 32 watt

Example: A4302-H120-18

Consult factory for more information on compatible dimmers.



The A4306 is a 4" aperture architectural frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceiling. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types.

A4306

4" Architectural Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 125-127

NOT FOR USE IN INSULATED CEILINGS

Dimensions

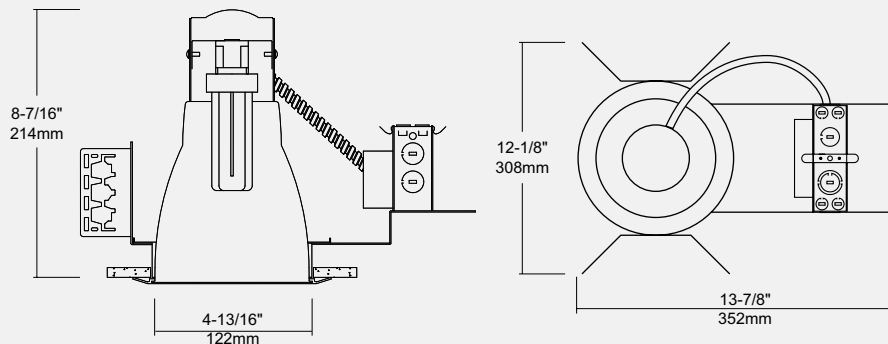

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 32W max.

Icon Features



5"
127mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A4306 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	

Example: A4306-H120-13

Consult factory for more information on compatible dimmers.




AT149R

4" Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



HOUSING

P. 122-124

Ordering Guide

Reflector	Trim Ring
AT149R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT149RF

4" Self-Flanged Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]




HOUSING

P. 122-124

Ordering Guide

Reflector
AT149RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

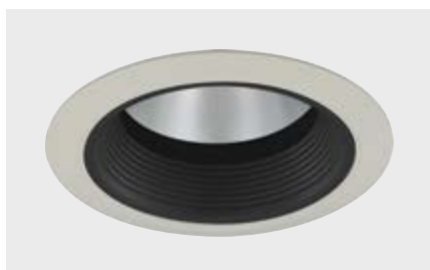


AT140B

4" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



HOUSING

P. 122-124

Ordering Guide

Reflector	Baffle	Trim Ring
AT140B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel

Example: AT140B-CL-BK-WP




AT146B

4" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]




HOUSING

P. 122-124

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT146B -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

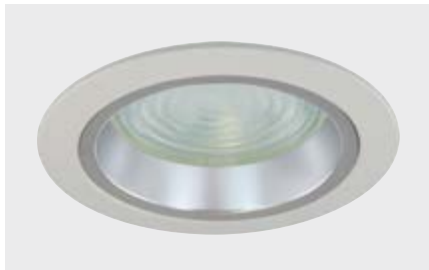


AT146C

4" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



HOUSING

P. 122-124

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT146C -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

Example: AT146C-CL-UN-WH-FR




AT148

4" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



P. 122-124

Ordering Guide

Reflector	Metal Trim Ring
AT148 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT148S

4" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



P. 122-124

Ordering Guide

Reflector	Metal Trim Ring
AT148S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT141

4" Reflector with Wall Wash Kickplate

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]



P. 122-124

Ordering Guide

Reflector	Trim Ring
AT141 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT141-CL-WH



The A6301 is a 6" aperture flat frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6301

6" Flat Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 × 13 watt (G24q-1)
 - * 1 × 18 watt (G24q-2)
 - * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 1 × 18 watt (GX24q-2)
 - * 1 × 26 watt (GX24q-3)
 - * 1 × 32 watt (GX24q-3)
 - * 1 × 42 watt (GX24q-4)
 - * 1 × 57 watt (GX24q-5)

Trim Options

See pages 131-134

NOT FOR USE IN INSULATED CEILINGS


Dimensions

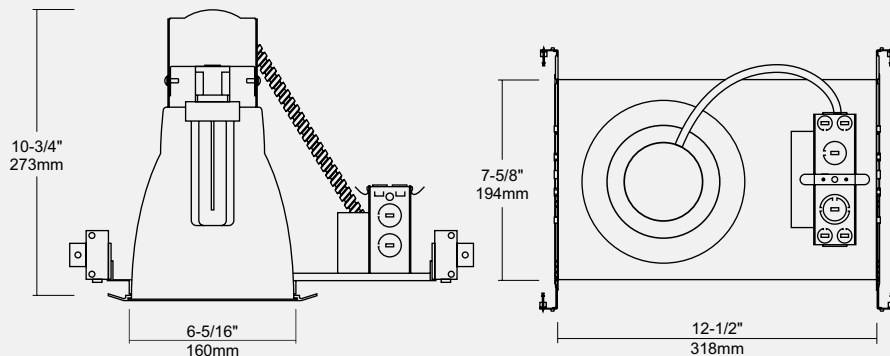

Compatible Lamps

- ◀ Double Twin Tube (Quad/CFQ), 26W max.
- ◀ Triple Twin Tube (CFTR), 57W max.

Icon Features

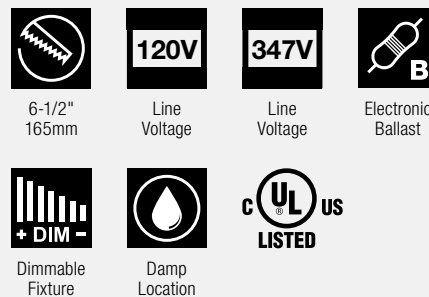

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6301 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	
	42 : 1 × 42 watt	
	57 : 1 × 57 watt	

Example: A6301-H120-26

Consult factory for more information on compatible dimmers.



The A6302 is a 6" aperture remodeling frame-in kit for vertical CFL lamps. The A6302 is designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types.

A6302

6" Remodel Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 × 13 watt (G24q-1)
 - * 1 × 18 watt (G24q-2)
 - * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 1 × 18 watt (GX24q-2)
 - * 1 × 26 watt (GX24q-3)
 - * 1 × 32 watt (GX24q-3)
 - * 1 × 42 watt (GX24q-4)
 - * 1 × 57 watt (GX24q-5)

Trim Options

See pages 131-134

NOT FOR USE IN INSULATED CEILINGS


Dimensions

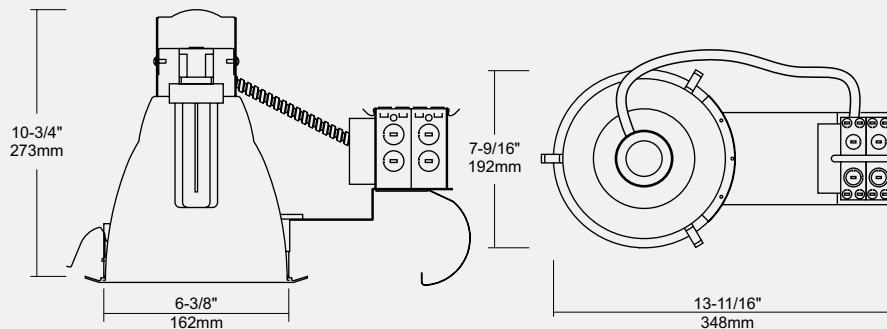

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 57W max.

Icon Features

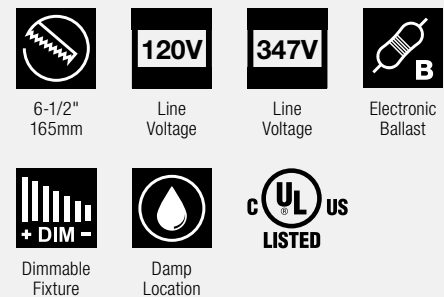

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6302		
	H120 : 120V HPF	13 : 1 × 13 watt
	H347 : 347V HPF	18 : 1 × 18 watt
		26 : 1 × 26 watt
		32 : 1 × 32 watt
		42 : 1 × 42 watt
		57 : 1 × 57 watt

Example: A6302-H120-18

Consult factory for more information on compatible dimmers.



The A6306 is a 6" aperture frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types.

A6306

6" Architectural Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)

* 1 × 42 watt (GX24q-4)

* 1 × 57 watt (GX24q-5)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 131-134

NOT FOR USE IN INSULATED CEILINGS

Dimensions

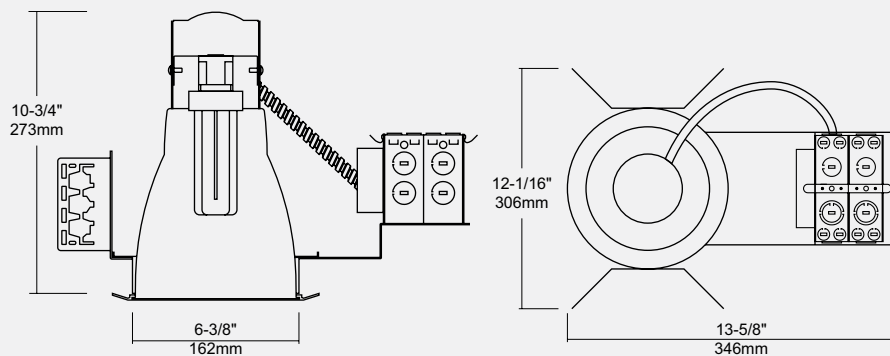

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 57W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

A6306	Ballast Voltage	Lamp Wattage	Options
	H120 : 120V HPF H347 : 347V HPF	13 : 1 × 13 watt 18 : 1 × 18 watt 26 : 1 × 26 watt 32 : 1 × 32 watt 42 : 1 × 42 watt 57 : 1 × 57 watt	EM : Emergency with remote test switch

Example: A6306-H120-13

Consult factory for more information on compatible dimmers.




AT169R

6" Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]



HOUSING

P. 128-130

Ordering Guide

Reflector	Trim Ring
AT169R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT169RF

6" Self-Flanged Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]




HOUSING

P. 128-130

Ordering Guide

Reflector
AT169RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

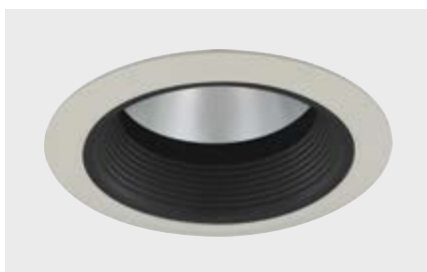


AT160B

6" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]



HOUSING

P. 128-130

Ordering Guide

Reflector	Baffle	Trim Ring
AT160B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
	PB : Polished Brass	UN : Natural Steel
		PB : Polished Brass

Example: AT160B-CL-WH-BP




AT166B

6" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]




HOUSING

P. 128-130

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT166B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

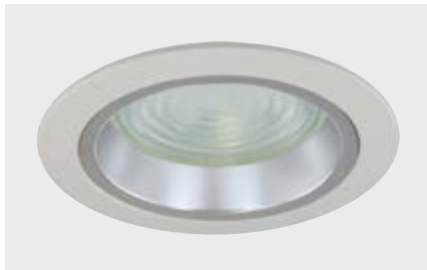


AT166C

6" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]



HOUSING

P. 128-130

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT166C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

Example: AT166C-CL-SN-WH-SPL




AT168

6" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]



HOUSING

P. 128-130

Ordering Guide

Reflector	Metal Trim Ring
AT168 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT168S

6" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]



HOUSING

P. 128-130

Ordering Guide

Reflector	Metal Trim Ring
AT168S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT161

6" Reflector with Wall Wash Kickplate

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]



HOUSING

P. 128-130

Ordering Guide

Reflector	Trim Ring
AT161 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT161-MA-BK



AT1654C

6" Reflector with Wall Wash Plate


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]

Ordering Guide

Reflector	Wall Wash Plate	Metal Trim Ring
AT1654C -		
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		



HOUSING

P. 128-130



AT1659R

6" Reflector with Cross Louver Blade


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]

Ordering Guide

Reflector	Trim Ring
AT1659R -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass



HOUSING

P. 128-130

Example: AT1659R-HC-WH



The A8301 is an 8" aperture flat frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A8301

8" Flat Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Constructed of aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)

* 1 × 42 watt (GX24q-4)

* 1 × 57 watt (GX24q-5)


* 1 × 70 watt (GX24q-6)

Trim Options

See pages 138-141

NOT FOR USE IN INSULATED CEILINGS

Dimensions

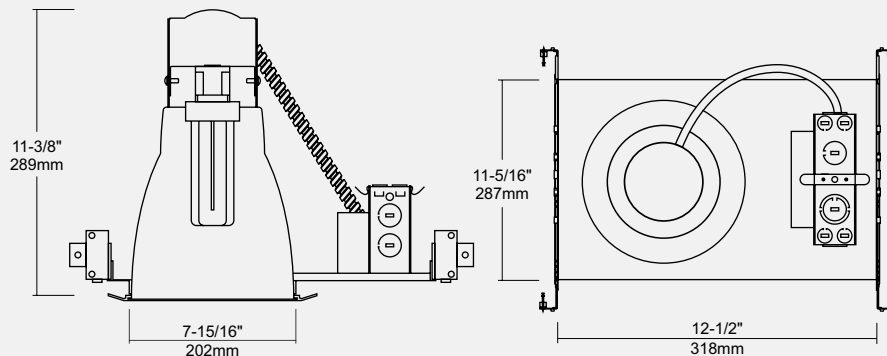

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 70W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8301 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	
	42 : 1 × 42 watt	
	57 : 1 × 57 watt	
	70 : 1 × 70 watt	

Example: A8301-H120-26

Consult factory for more information on compatible dimmers.



The A8302 is an 8" aperture remodeling frame-in kit for vertical CFL lamps. The A8302 is designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types.

A8302

8" Remodel Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
- * 1 × 13 watt (G24q-1)
- * 1 × 18 watt (G24q-2)
- * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
- * 1 × 18 watt (GX24q-2)
- * 1 × 26 watt (GX24q-3)
- * 1 × 32 watt (GX24q-3)
- * 1 × 42 watt (GX24q-4)
- * 1 × 57 watt (GX24q-5)
- * 1 × 70 watt (GX24q-6)

Trim Options

See pages 138-141

NOT FOR USE IN INSULATED CEILINGS


Dimensions

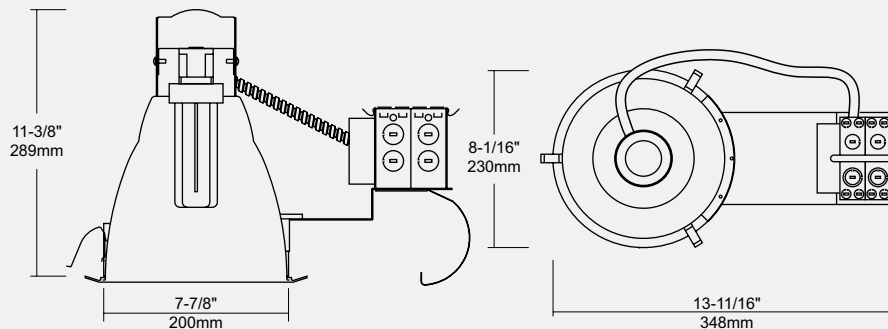

Compatible Lamps

- ◀ Double Twin Tube (Quad/CFQ), 26W max.
- ◀ Triple Twin Tube (CFTR), 70W max.

Icon Features

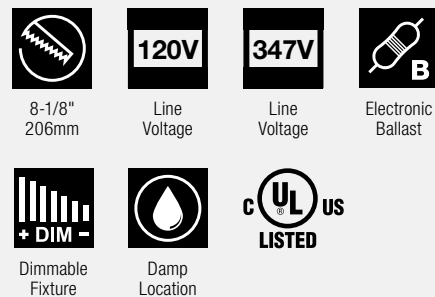

Ordering Guide

	Ballast Voltage	Lamp Wattage
A8302		
	H120 : 120V HPF	13 : 1 × 13 watt
	H347 : 347V HPF	18 : 1 × 18 watt
		26 : 1 × 26 watt
		32 : 1 × 32 watt
		42 : 1 × 42 watt
		57 : 1 × 57 watt
		70 : 1 × 70 watt

Example: A8302-H120-18

Consult factory for more information on compatible dimmers.



The A8306 is an 8" aperture frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. Heat sink aluminum socket housing with vertically adjustable lamp holder may produce various focuses for different lamp types.

A8306

8" Architectural Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)

* 1 × 42 watt (GX24q-4)

* 1 × 57 watt (GX24q-5)

* 1 × 70 watt (GX24q-6)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 138-141

NOT FOR USE IN INSULATED CEILINGS

Dimensions

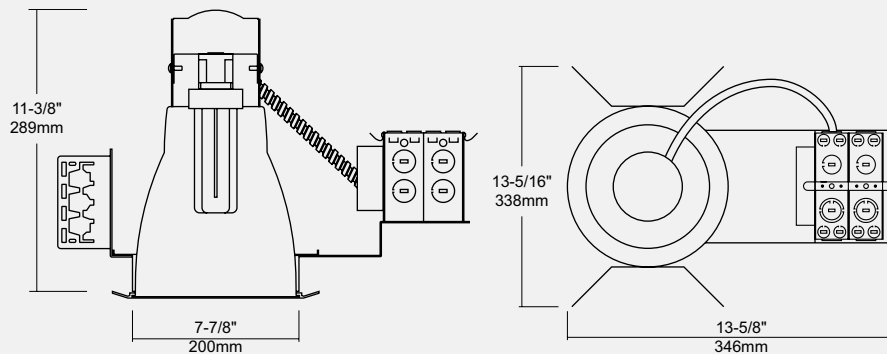

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 70W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8306 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	
	42 : 1 × 42 watt	
	57 : 1 × 57 watt	
	70 : 1 × 70 watt	

Example: A8306-H120-13

Consult factory for more information on compatible dimmers.



AT189R

8" Full Open Reflector


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]

Ordering Guide

Reflector	Trim Ring
AT189R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



HOUSING

P. 135-137



AT189RF

8" Self-Flanged Full Open Reflector


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]


Ordering Guide

Reflector
AT189RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



HOUSING

P. 135-137

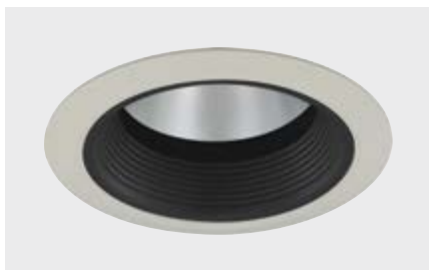

AT180B

8" Reflector with Baffle


Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]

Ordering Guide

Reflector	Baffle	Trim Ring
AT180B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel
		PB : Polished Brass



HOUSING

P. 135-137

Example: AT180B-CL-BK-WH




AT186B

8" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 135-137

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT186B -	-	-	-
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT186C

8" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 135-137

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT186C -	-	-	-
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT186C-CL-UN-WH-FR



AT188


8" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 135-137

Ordering Guide

Reflector	Metal Trim Ring
AT188 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



AT188S


8" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 135-137

Ordering Guide

Reflector	Metal Trim Ring
AT188S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



AT181


8" Reflector with Wall Wash Kickplate

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 135-137

Ordering Guide

Reflector	Trim Ring
AT181 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT181-CL-WH



AT1859R


8" Reflector with Cross Louver Blade

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



P. 135-137

Ordering Guide

Reflector	Trim Ring
AT1859R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT1859R-HC-WH



The A10301 is a 10" aperture flat frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. The heat sink aluminum socket housing, with vertically adjustable lamp holder, may produce various focuses for different lamp types. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A10301

10" Flat Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 × 13 watt (G24q-1)
 - * 1 × 18 watt (G24q-2)
 - * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 1 × 18 watt (GX24q-2)
 - * 1 × 26 watt (GX24q-3)
 - * 1 × 32 watt (GX24q-3)
 - * 1 × 42 watt (GX24q-4)
 - * 1 × 57 watt (GX24q-5)
 - * 1 × 70 watt (GX24q-6)

Trim Options

See pages 145-147

NOT FOR USE IN INSULATED CEILINGS


Dimensions

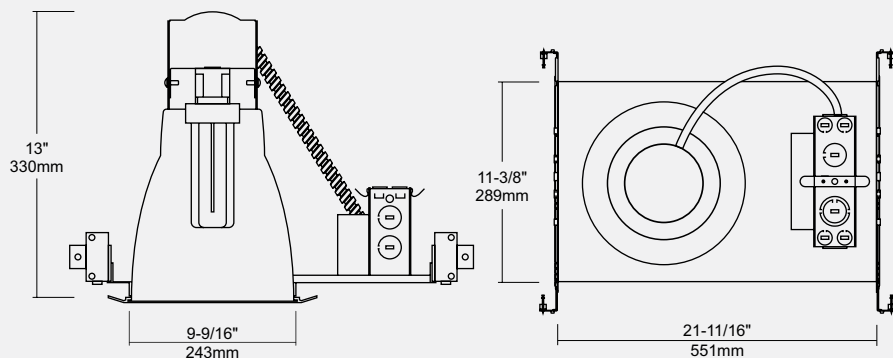

Compatible Lamps

- ◀ Double Twin Tube (Quad/CFQ), 26W max.
- ◀ Triple Twin Tube (CFTR), 70W max.

Icon Features

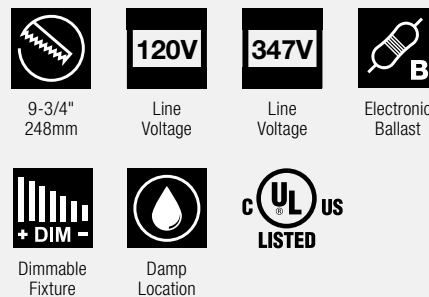

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10301 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	
	42 : 1 × 42 watt	
	57 : 1 × 57 watt	
	70 : 1 × 70 watt	

Example: A10301-H120-26

Consult factory for more information on compatible dimmers.



The A10302 is a 10" aperture remodeling frame-in kit for vertical CFL lamps. The A10302 is designed for use in non-insulated ceilings. The heat sink aluminum socket housing, with vertically adjustable lamp holder, may produce various focuses for different lamp types.

A10302

10" Remodel Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100-0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 × 13 watt (G24q-1)
 - * 1 × 18 watt (G24q-2)
 - * 1 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 1 × 18 watt (GX24q-2)
 - * 1 × 26 watt (GX24q-3)
 - * 1 × 32 watt (GX24q-3)
 - * 1 × 42 watt (GX24q-4)
 - * 1 × 57 watt (GX24q-5)
 - * 1 × 70 watt (GX24q-6)

Trim Options

See pages 145-147

NOT FOR USE IN INSULATED CEILINGS


Dimensions

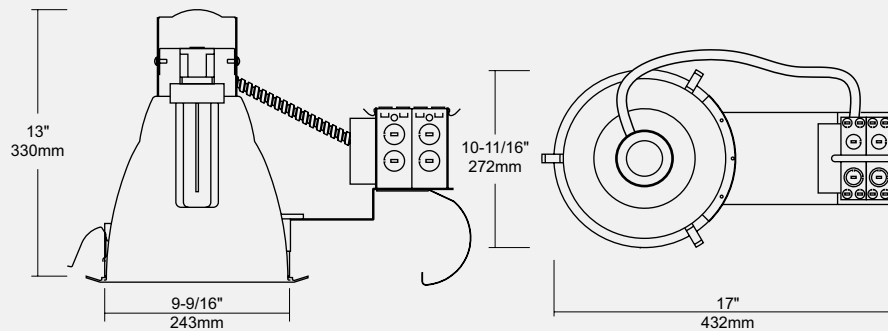

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 70W max.

Icon Features

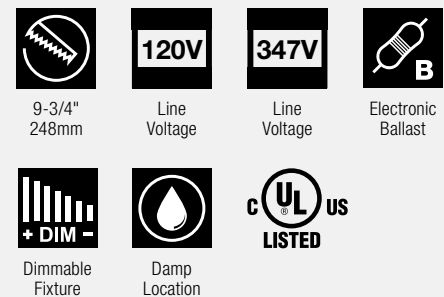

Ordering Guide

	Ballast Voltage	Lamp Wattage
A10302	-	-
	H120 : 120V HPF	13 : 1 × 13 watt
	H347 : 347V HPF	18 : 1 × 18 watt
		26 : 1 × 26 watt
		32 : 1 × 32 watt
		42 : 1 × 42 watt
		57 : 1 × 57 watt
		70 : 1 × 70 watt

Example: A10302-H120-18

Consult factory for more information on compatible dimmers.



The A10306 is a 10" aperture frame-in kit for vertical CFL lamps. These are designed for use in non-insulated ceilings. The heat sink aluminum socket housing, with vertically adjustable lamp holder, may produce various focuses for different lamp types.

A10306

10" Architectural Frame-in Kit for Vertical Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. It accommodates a G24q/GX24q socket and provides a height adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 × 13 watt (G24q-1)

* 1 × 18 watt (G24q-2)

* 1 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 18 watt (GX24q-2)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)

* 1 × 42 watt (GX24q-4)

* 1 × 57 watt (GX24q-5)

* 1 × 70 watt (GX24q-6)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 145-147

NOT FOR USE IN INSULATED CEILINGS

Dimensions

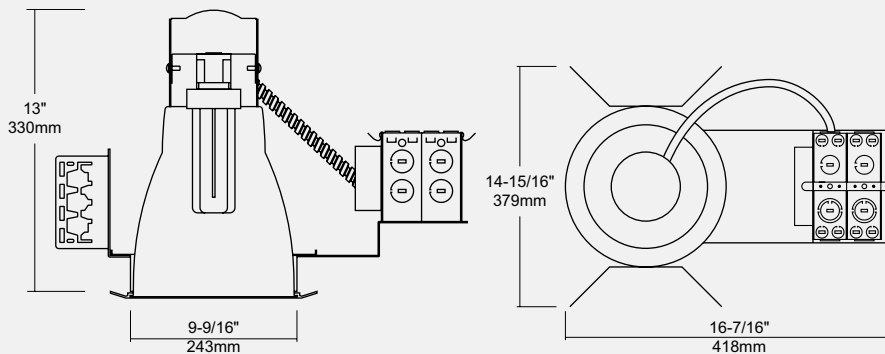

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 70W max.

Icon Features



9-3/4"
248mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10306 -	-	-
H120 : 120V HPF	13 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	18 : 1 × 18 watt	
	26 : 1 × 26 watt	
	32 : 1 × 32 watt	
	42 : 1 × 42 watt	
	57 : 1 × 57 watt	
	70 : 1 × 70 watt	

Example: A10306-H120-13

Consult factory for more information on compatible dimmers.




AT1109R

10" Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 142-144

Ordering Guide

Reflector	Trim Ring
AT1109R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT1109RF

10" Self-Flanged Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]




HOUSING

P. 142-144

Ordering Guide

Reflector
AT1109RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

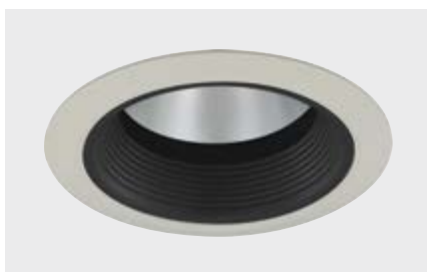


AT1100B

10" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 142-144

Ordering Guide

Reflector	Baffle	Trim Ring
AT1100B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel

Example: AT1100B-CL-BK-WP




AT196B

10" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]




HOUSING

P. 142-144

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT196B -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

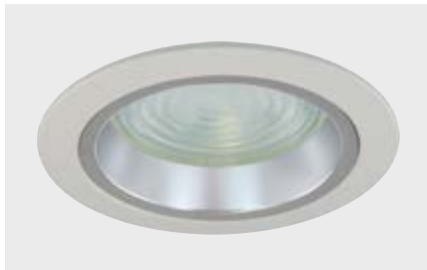


AT196C

10" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



HOUSING

P. 142-144

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT196C -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

Example: AT196C-CL-UN-WH-FR



AT198


10" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT198 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass

HOUSING

P. 142-144



AT198S


10" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 × 13W (G24q-1) [DTT]
- 1 × 18W (G24q-2) [DTT]
- 1 × 26W (G24q-3) [DTT]
- 1 × 18W (GX24q-2) [TTT]

- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]
- 1 × 57W (GX24q-5) [TTT]
- 1 × 70W (GX24q-6) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT198S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass

HOUSING

P. 142-144

Example: AT198S-CL-WH



The A6401 is a 6" aperture frame-in kit for new construction application with horizontal CFL lamps for wide beam area. The A6401 offers a wide selection of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A6401

6" Flat Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
- * 2 × 13 watt (G24q-1)
- * 2 × 18 watt (G24q-2)
- * 2 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
- * 1 × 26 watt (GX24q-3)
- * 1 × 32 watt (GX24q-3)
- * 1 × 42 watt (GX24q-4)

Trim Options

See pages 151-157

NOT FOR USE IN INSULATED CEILINGS


Dimensions

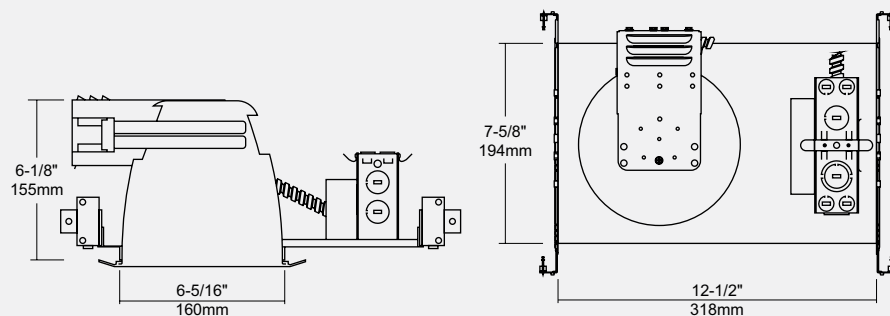

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 42W max.

Icon Features

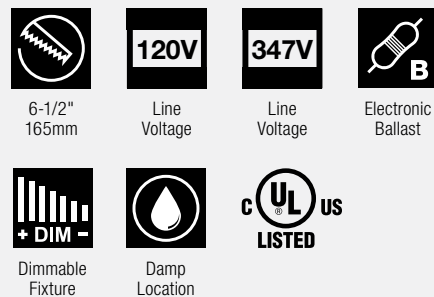

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6401 -	-	-
H120 : 120V HPF	126 : 1 × 26 watt	EM : Emergency with remote test switch
H347 : 347V HPF	132 : 1 × 32 watt	
	142 : 1 × 42 watt	
	213 : 2 × 13 watt	
	218 : 2 × 18 watt	
	226 : 2 × 26 watt	

Example: A6401-H120-126

Consult factory for more information on compatible dimmers.



The A6402 is a 6" aperture frame-in kit for remodeling applications for horizontal CFL lamps. The A6402 is designed for use in non-insulated existing ceilings. It can be installed from below the ceiling.

A6402

6" Remodel Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
- * 2 × 13 watt (G24q-1)
- * 2 × 18 watt (G24q-2)
- * 2 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
- * 1 × 26 watt (GX24q-3)
- * 1 × 32 watt (GX24q-3)
- * 1 × 42 watt (GX24q-4)

Trim Options

See pages 151-157

NOT FOR USE IN INSULATED CEILINGS


Dimensions

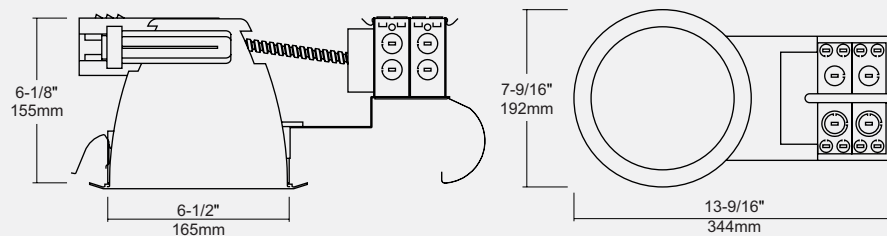

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 42W max.

Icon Features

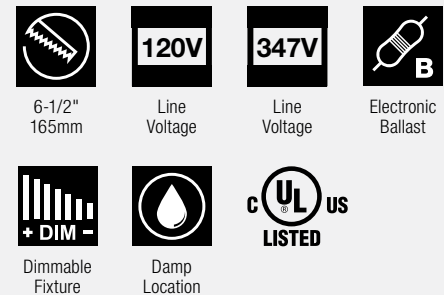

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6402 -		
	H120 : 120V HPF	126 : 1 × 26 watt
	H347 : 347V HPF	132 : 1 × 32 watt
		142 : 1 × 42 watt
		213 : 2 × 13 watt
		218 : 2 × 18 watt
		226 : 2 × 26 watt

Example: A6402-H120-218

Consult factory for more information on compatible dimmers.



The A6406 is a 6" aperture frame-in kit for horizontal CFL lamps for wide beam area. The A6406 offers a wide beam area and choice of trim types including reflectors, lenses and wall wash trims.

A6406

6" Architectural Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Built with 20ga cross-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 2 × 13 watt (G24q-1)

* 2 × 18 watt (G24q-2)

* 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)

* 1 × 42 watt (GX24q-4)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 151-157

NOT FOR USE IN INSULATED CEILINGS

Dimensions

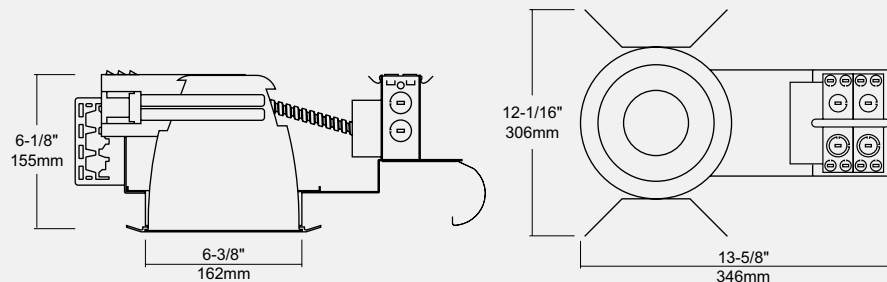

Compatible Lamps

◀ Double Twin Tube (Quad/CFQ), 26W max.

◀ Triple Twin Tube (CFTR), 42W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6406 -	-	-
H120 : 120V HPF	126 : 1 × 26 watt	EM : Emergency with remote test switch
H347 : 347V HPF	132 : 1 × 32 watt	
	142 : 1 × 42 watt	
	213 : 2 × 13 watt	
	218 : 2 × 18 watt	
	226 : 2 × 26 watt	

Example: A6406-H120-142

Consult factory for more information on compatible dimmers.




AT39R

6" Full Open Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 148-150

Ordering Guide

Reflector	Trim Ring
AT39R -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT39RF

6" Self Flange Open Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 148-150

Ordering Guide

Reflector
AT39RF -
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT30B

6" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 148-150

Ordering Guide

Reflector	Baffle	Trim Ring
AT30B -		
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
	PB : Polished Brass	UN : Natural Steel
		PB : Polished Brass

Example: AT30B-CL-WH-WH




AT36B

6" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT36B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	MO : Mocha	WH : White	DR : Drop Opal Lens
HC : Haze Clear	CA : Cappuccino	CA : Cappuccino	CT : Frosted Clear Centre
CP : Champagne	SN : Satin Nickel	CH : Chrome	SPL : Comfort Linear
OR : Pewter	AN : Antique Nickel	UN : Natural Steel	
MA : Matte Platinum	UN : Natural Steel	PB : Polished Brass	
	AC : Antique Copper	AN : Antique Nickel	
	PB : Polished Brass	PB : Polished Brass	




AT36C

6" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT36C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	MO : Mocha	WH : White	DR : Drop Opal Lens
HC : Haze Clear	CA : Cappuccino	CA : Cappuccino	CT : Frosted Clear Centre
CP : Champagne	SN : Satin Nickel	CH : Chrome	SPL : Comfort Linear
OR : Pewter	AN : Antique Nickel	UN : Natural Steel	
MA : Matte Platinum	UN : Natural Steel	PB : Polished Brass	
	AC : Antique Copper	AN : Antique Nickel	
	PB : Polished Brass	PB : Polished Brass	

Example: AT36C-CL-CH-WH-FR




AT38

6" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 148-150

Ordering Guide

Reflector	Metal Trim Ring
AT38 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT38S

6" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 148-150

Ordering Guide

Reflector	Metal Trim Ring
AT38S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT31

6" Reflector with Wall Wash Kickplate

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]




P. 148-150

Ordering Guide

Reflector	Trim Ring
AT31 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel

Example: AT31-CL-WP

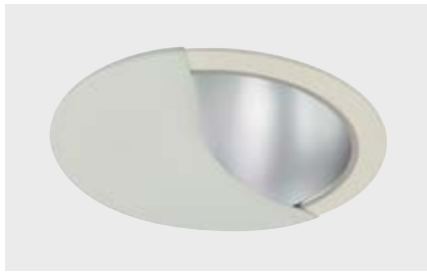


AT354C

6" Reflector with Wall Wash Plate

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Metal Trim Ring
AT354C -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT639R

6" Reflector with Cross Louver Blade

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Trim Ring
AT639R -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT39LR

6" Shallow Full Open Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]




HOUSING

P. 148-150

Ordering Guide

Reflector	Trim Ring
AT39LR -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT39LR-HC-WP

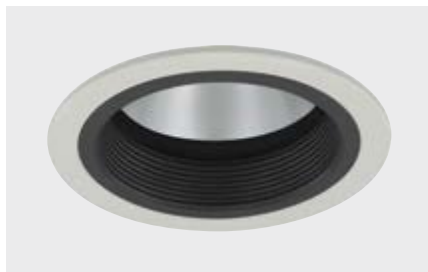


AT30LB

6" Shallow Reflector with Baffle

Lamping Options

Compact Fluorescent


- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Baffle	Trim Ring
AT30LB -		
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		

HOUSING
P. 148-150

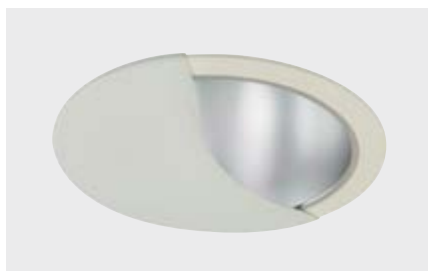


AT354LC

6" Shallow Reflector with Wall Wash Plate

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT354LC -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

HOUSING
P. 148-150




AT31L

6" Shallow Reflector with Wall Wash Kickplate

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Trim Ring
AT31L -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass

HOUSING
P. 148-150

Example: AT31L-CL-WP




AT36LB

6" Shallow Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT36LB - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	




AT36LC

6" Shallow Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT36LC - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

Example: AT36LC-WH-CH-WH-CT




AT38L

6" Shallow Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]




HOUSING

P. 148-150

Ordering Guide

Reflector	Metal Trim Ring
AT38L - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

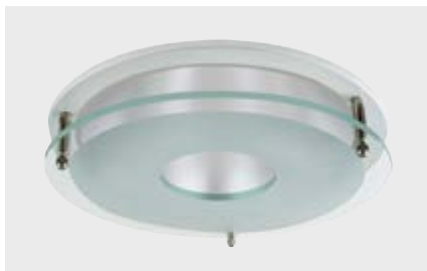


AT38LS

6" Shallow Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Metal Trim Ring
AT38LS - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT639LR

6" Shallow Reflector with Cross Louver Blade

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 148-150

Ordering Guide

Reflector	Trim Ring
AT639LR - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel

Example: AT639LR-CL-WP



The A8401 is an 8" aperture frame-in kit for horizontal CFL lamps for wide beam areas and task lighting. The A8401 offers a wide choice of trim types including reflectors, lenses and wall wash trims. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A8401

8" Flat Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 or 2 × 13 watt (G24q-1)

* 1 or 2 × 18 watt (G24q-2)

* 1 or 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 or 2 × 26 watt (GX24q-3)

* 1 or 2 × 32 watt (GX24q-3)


* 1 or 2 × 42 watt (GX24q-4)

Trim Options

See pages 161-167

NOT FOR USE IN INSULATED CEILINGS

Dimensions

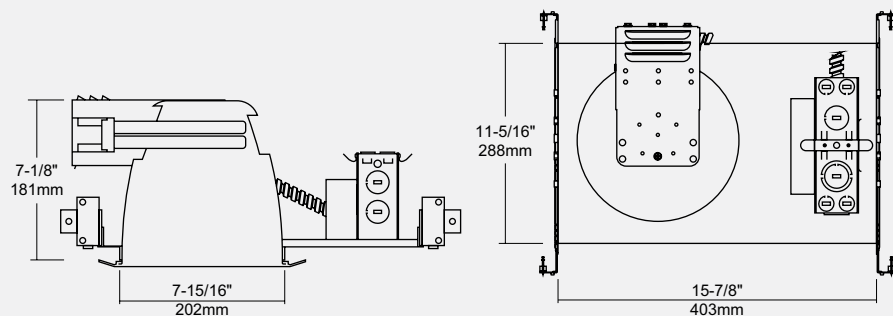

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 42W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8401 -	-	-
H120 : 120V HPF	113 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	118 : 1 × 18 watt	
	126 : 1 × 26 watt	
	132 : 1 × 32 watt	
	142 : 1 × 42 watt	
	213 : 2 × 13 watt	
	218 : 2 × 18 watt	
	226 : 2 × 26 watt	
	232 : 2 × 32 watt	
	242 : 2 × 42 watt	

Example: A8401-H120-113

Consult factory for more information on compatible dimmers.



The A8402 is an 8" aperture frame-in kit for remodeling for horizontal CFL lamps. The A8402 is designed for use in non-insulated existing ceilings. It can be installed from below the ceiling.

A8402

8" Remodel Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 3 remodel clips and 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 or 2 × 13 watt (G24q-1)
 - * 1 or 2 × 18 watt (G24q-2)
 - * 1 or 2 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 1 or 2 × 26 watt (GX24q-3)
 - * 1 or 2 × 32 watt (GX24q-3)
 - * 1 or 2 × 42 watt (GX24q-4)

Trim Options

See pages 161-167

NOT FOR USE IN INSULATED CEILINGS


Dimensions

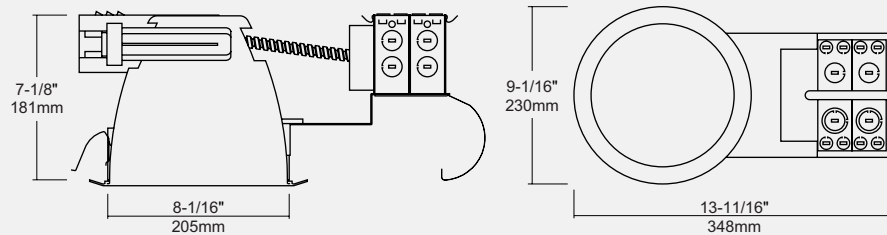

Compatible Lamps

- ◀ Double Twin Tube (Quad/CFQ), 26W max.
- ◀ Triple Twin Tube (CFTR), 42W max.

Icon Features

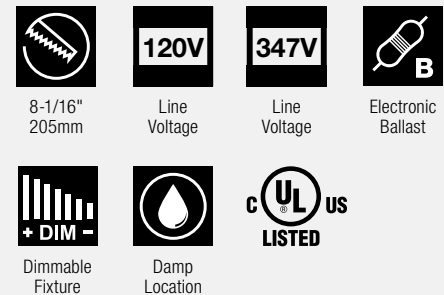

Ordering Guide

Ballast Voltage	Lamp Wattage	
A8402 -		
H120 : 120V HPF	113 : 1 × 13 watt	213 : 2 × 13 watt
H347 : 347V HPF	118 : 1 × 18 watt	218 : 2 × 18 watt
	126 : 1 × 26 watt	226 : 2 × 26 watt
	132 : 1 × 32 watt	232 : 2 × 32 watt
	142 : 1 × 42 watt	242 : 2 × 42 watt

Example: A8402-H120-218

Consult factory for more information on compatible dimmers.



The A8406 is an 8" aperture frame-in kit for horizontal CFL lamps for wide beam area and task lighting. The A8406 offers a wide selection of trim types including reflectors, lenses and wall wash trims.

A8406

8" Architectural Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 or 2 × 13 watt (G24q-1)

* 1 or 2 × 18 watt (G24q-2)

* 1 or 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 or 2 × 26 watt (GX24q-3)

* 1 or 2 × 32 watt (GX24q-3)

* 1 or 2 × 42 watt (GX24q-4)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 161-167

NOT FOR USE IN INSULATED CEILINGS

Dimensions

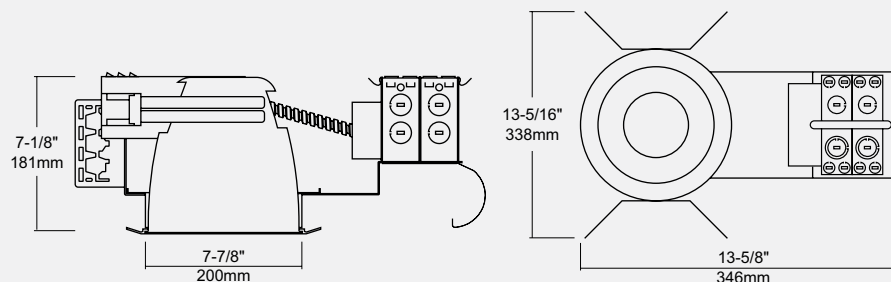

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 42W max.

Icon Features



8-1/16"
205mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8406 -		
H120 : 120V HPF	113 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	213 : 2 × 13 watt	
	118 : 1 × 18 watt	218 : 2 × 18 watt
	126 : 1 × 26 watt	226 : 2 × 26 watt
	132 : 1 × 32 watt	232 : 2 × 32 watt
	142 : 1 × 42 watt	242 : 2 × 42 watt

Example: A8406-H347-232

Consult factory for more information on compatible dimmers.




AT89R

8" Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Trim Ring
AT89R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT89RF

8" Self Flange Open Reflector

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector
AT89RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT80B

8" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Baffle	Trim Ring
AT80B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel

Example: AT80B-CL-WH-WP




AT86B

8" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT86B -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	MO : Mocha	AN : Antique Nickel	
MA : Matte Platinum	CA : Cappuccino	PB : Polished Brass	
	CH : Chrome		
	UN : Natural Steel		




AT86C

8" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT86C -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	MO : Mocha	AN : Antique Nickel	
MA : Matte Platinum	CA : Cappuccino	PB : Polished Brass	
	CH : Chrome		
	UN : Natural Steel		

Example: AT86C-CL-WH-WH-AL



AT87


8" Reflector with Frosted Lens on Surface

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]

- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



P. 158-160

Ordering Guide

Reflector	Trim Ring
AT87 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



AT88


8" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]

- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



P. 158-160

Ordering Guide

Reflector	Metal Trim Ring
AT88 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	MO : Mocha
MA : Matte Platinum	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



AT88S


8" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]

- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



P. 158-160

Ordering Guide

Reflector	Metal Trim Ring
AT88S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	MO : Mocha
MA : Matte Platinum	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT88S-HC-WH




AT81

8" Reflector with Wall Wash Kickplate

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Trim Ring
AT81 - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT859R

8" Reflector with Cross Louver Blade

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Trim Ring
AT859R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT89LR

8" Shallow Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Trim Ring
AT89LR - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT89LR-HC-WH




AT80LB

8" Shallow Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Baffle	Trim Ring
AT80LB -		
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		




AT88L

8" Shallow Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT88L -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT88LS

8" Shallow Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



Ordering Guide

Reflector	Metal Trim Ring
AT88LS -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



Example: AT88LS-OR-CH




AT86LB

8" Shallow Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT86LB - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	




AT86LC

8" Shallow Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 158-160

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT86LC - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	AN : Antique Nickel	
MA : Matte Platinum	PB : Polished Brass	PB : Polished Brass	

Example: AT86LC-CL-CH-WP-CT



AT859LR


8" Shallow Reflector with Cross Louver Blade

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]

- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



P. 158-160

Ordering Guide

Reflector	Trim Ring
AT859LR - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass



AT87L


8" Shallow Reflector with Frosted Lens on Surface

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]

- 1 or 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]



P. 158-160

Ordering Guide

Reflector	Trim Ring
AT87L - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass

Example: AT87L-CL-WP



The A10401 is a 10" aperture frame-in kit for horizontal CFL lamps for wide beam area. The A10401 is designed for use in existing non-insulated ceilings or for existing insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings. The A10401 offers a wide choice of trim types including reflectors, lenses and wall wash trims.

A10401

10" Flat Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent


- DTT – Double Twin Tube (Quad/CFQ)
 - * 1 or 2 × 13 watt (G24q-1)
 - * 1 or 2 × 18 watt (G24q-2)
 - * 1 or 2 × 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
 - * 2 × 26 watt (GX24q-3)
 - * 1 or 2 × 32 watt (GX24q-3)
 - * 1 or 2 × 42 watt (GX24q-4)
 - * 1 or 2 × 57 watt (GX24q-5)

Trim Options

See pages 170-172

NOT FOR USE IN INSULATED CEILINGS


Dimensions

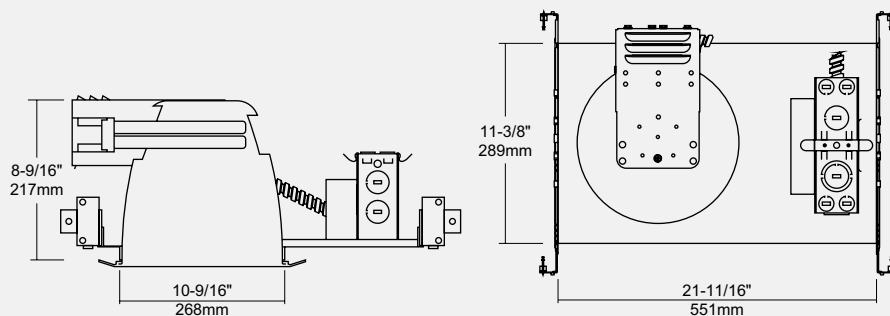

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 57W max.

Icon Features

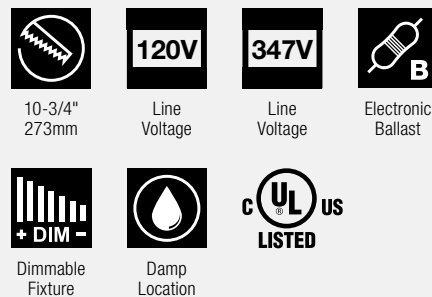

Ordering Guide

Ballast Voltage	Lamp Wattage
A10401 -	
H120 : 120V HPF	113 : 1 × 13 watt 213 : 2 × 13 watt
H347 : 347V HPF	118 : 1 × 18 watt 218 : 2 × 18 watt
	126 : 1 × 26 watt 226 : 2 × 26 watt
	132 : 1 × 32 watt 232 : 2 × 32 watt
	142 : 1 × 42 watt 242 : 2 × 42 watt
	157 : 1 × 57 watt 257 : 2 × 57 watt

Example: A10401-H120-213

Consult factory for more information on compatible dimmers.



The A10406 is a 10" aperture frame-in kit for horizontal CFL lamps for wide beam area. The A10406 offers a wide choice of trim types including reflectors, lenses and wall wash trim.

A10406

10" Architectural Frame-in Kit for Horizontal Fluorescent Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse. 120V electronic ballast dimmable 100~0%.

Socket Cup/Socket

Plastic lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 or 2 × 13 watt (G24q-1)

* 1 or 2 × 18 watt (G24q-2)

* 1 or 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 2 × 26 watt (GX24q-3)

* 1 or 2 × 32 watt (GX24q-3)

* 1 or 2 × 42 watt (GX24q-4)

* 1 or 2 × 57 watt (GX24q-5)

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 170-172

NOT FOR USE IN INSULATED CEILINGS

Dimensions

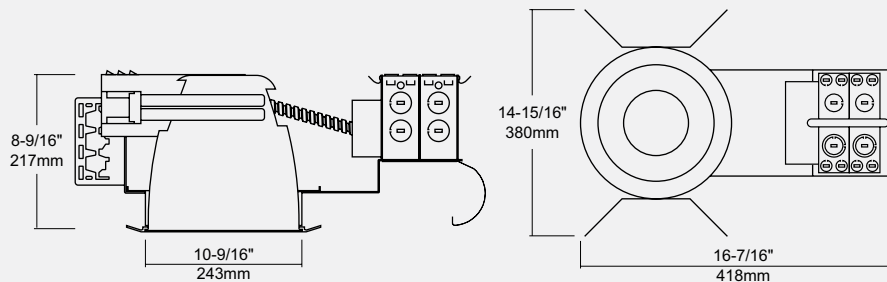

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 57W max.

Icon Features



10-3/4"
273mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Dimmable
Fixture



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10406 -		
H120 : 120V HPF	113 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	118 : 1 × 18 watt	
	126 : 1 × 26 watt	
	132 : 1 × 32 watt	
	142 : 1 × 42 watt	
	157 : 1 × 57 watt	
	213 : 2 × 13 watt	
	218 : 2 × 18 watt	
	226 : 2 × 26 watt	
	232 : 2 × 32 watt	
	242 : 2 × 42 watt	
	257 : 2 × 57 watt	

Example: A10406-H347-157

Consult factory for more information on compatible dimmers.




AT99R

10" Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



HOUSING

P. 168-169

Ordering Guide

Reflector	Trim Ring
AT99R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel
	PB : Polished Brass




AT99RF

10" Full Open Self-Flanged Reflector

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



HOUSING

P. 168-169

Ordering Guide

Reflector
AT99RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT90B

10" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



HOUSING

P. 168-169

Ordering Guide

Reflector	Baffle	Trim Ring
AT90B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel
		PB : Polished Brass

Example: AT90B-CL-WH-WH




AT96B

10" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



P. 168-169

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT96B -	-	-	-
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	MO : Mocha	AN : Antique Nickel	
MA : Matte Platinum	CA : Cappuccino	PB : Polished Brass	
	CH : Chrome		
	UN : Natural Steel		




AT96C

10" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



P. 168-169

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT96C -	-	-	-
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	MO : Mocha	AN : Antique Nickel	
MA : Matte Platinum	CA : Cappuccino	PB : Polished Brass	
	CH : Chrome		
	UN : Natural Steel		

Example: AT96C-CL-CH-WH-FR




AT98

10" Reflector with Frosted Drop Lens

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



HOUSING

P. 168-169

Ordering Guide

Reflector	Metal Trim Ring
AT98 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT98S

10" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 2 × 26W (GX24q-3) [TTT]
- 1 or 2 × 32W (GX24q-3) [TTT]
- 1 or 2 × 42W (GX24q-4) [TTT]
- 1 or 2 × 57W (GX24q-5) [TTT]



HOUSING

P. 168-169

Ordering Guide

Reflector	Metal Trim Ring
AT98S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT98S-CL-WH



The A7406S is a 7" aperture super shallow housing for wide beam distribution. The A7406S offers a wide choice of trim types including reflectors with lenses and cross louvers. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A7406S

7" Super Shallow Horizontal Housing for CFL Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes a 1/2" (13mm) deep collar. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse.

Socket Cup/Socket

Lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 1 or 2 × 13 watt (G24q-1)

* 1 or 2 × 18 watt (G24q-2)

* 1 or 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 1 × 26 watt (GX24q-3)

* 1 × 32 watt (GX24q-3)


* 1 × 42 watt (GX24q-4)

Trim Options

See pages 174-175

NOT FOR USE IN INSULATED CEILINGS

Dimensions

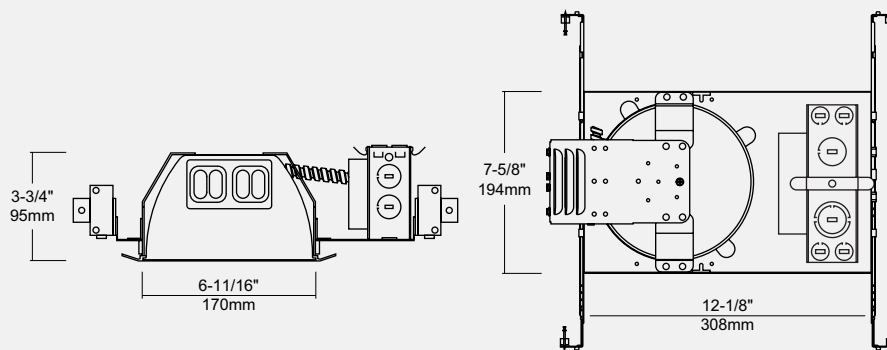

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 42W max.

Icon Features



6-7/8"
175mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A7406S -		
H120 : 120V HPF	113 : 1 × 13 watt	EM : Emergency with remote test switch
H347 : 347V HPF	118 : 1 × 18 watt	
	126 : 1 × 26 watt	
	132 : 1 × 32 watt	
	142 : 1 × 42 watt	
	213 : 2 × 13 watt	
	218 : 2 × 18 watt	
	226 : 2 × 26 watt	

Example: A7406S-H120-226




AT26B

7" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 173

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT26B -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	MO : Mocha	AN : Antique Nickel	
MA : Matte Platinum	CA : Cappuccino	PB : Polished Brass	
	CH : Chrome		
	UN : Natural Steel		




AT26C

7" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



HOUSING

P. 173

Ordering Guide

Reflector	Reflector Splay	Trim Ring	Lens Type
AT26C -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	MO : Mocha	AN : Antique Nickel	
MA : Matte Platinum	CA : Cappuccino	PB : Polished Brass	
	CH : Chrome		
	UN : Natural Steel		

Example: AT26C-CL-WH-WH-CT




AT29R

7" Full Open Reflector

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 173

Ordering Guide

Reflector	Trim Ring
AT29R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass
	AC : Antique Copper
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel




AT20B

7" Reflector with Baffle

Lamping Options

Compact Fluorescent

- 1 or 2 × 13W (G24q-1) [DTT]
- 1 or 2 × 18W (G24q-2) [DTT]
- 1 or 2 × 26W (G24q-3) [DTT]
- 1 × 26W (GX24q-3) [TTT]
- 1 × 32W (GX24q-3) [TTT]
- 1 × 42W (GX24q-4) [TTT]



P. 173

Ordering Guide

Reflector	Baffle	Trim Ring
AT20B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic
WH : White	BK : Black	BP : Black Plastic
GD : Gold	SN : Satin Nickel	WH : White
HC : Haze Clear	AN : Antique Nickel	BK : Black
CP : Champagne	AC : Antique Copper	SN : Satin Nickel
OR : Pewter		AN : Antique Nickel
MA : Matte Platinum		PB : Polished Brass
	MO : Mocha	AC : Antique Copper
	CA : Cappuccino	MO : Mocha
	CH : Chrome	CA : Cappuccino
	UN : Natural Steel	CH : Chrome
		UN : Natural Steel

Example: AT20B-CL-WH-WP



The A8406S is an 8" aperture super shallow housing for wide beam distribution. The A8406S offers a wide choice of trim types including reflectors with lenses. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

NOT FOR USE IN INSULATED CEILINGS

A8406S

8" Super Shallow Horizontal Housing for CFL Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation. Class P thermally protected by internal fuse.

Socket Cup/Socket

Lamp holders in stamped galvanized steel housing attached on the reflector top. It accommodates a G24q/GX24q socket for use with 4-pin lamps.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 2 × 13 watt (G24q-1)

* 2 × 18 watt (G24q-2)

* 2 × 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 2 × 18 watt (GX24q-2)

* 2 × 26 watt (GX24q-3)


* 2 × 32 watt (GX24q-3)

* 2 × 42 watt (GX24q-4)

Trim Options

See pages 177-178

Dimensions

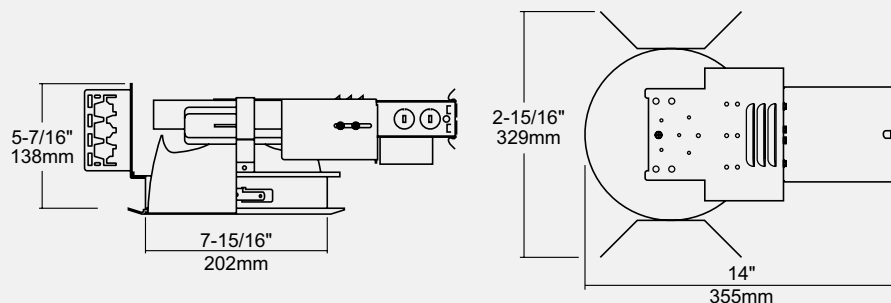

Compatible Lamps

Double Twin Tube (Quad/CFQ), 2 × 26W max.

Triple Twin Tube (CFTR), 2 × 42W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

A8406S	Ballast Voltage	Lamp Wattage	Options
	H120 : 120V HPF H347 : 347V HPF	213 : 2 × 13 watt 218 : 2 × 18 watt 226 : 2 × 26 watt 232 : 2 × 32 watt 242 : 2 × 42 watt	EM : Emergency with remote test switch

Example: A8406S-H120-226




AT850R

8" Full Open Reflector

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 2 × 18W (GX24q-2) [TTT]
- 2 × 26W (GX24q-3) [TTT]
- 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 176

Ordering Guide

Reflector	Trim Ring
AT850R - <input type="text"/>	<input type="text"/>
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass




AT840B

8" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 2 × 18W (GX24q-2) [TTT]
- 2 × 26W (GX24q-3) [TTT]
- 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 176

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT840B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter	PB : Polished Brass	AN : Antique Nickel	
MA : Matte Platinum		PB : Polished Brass	

Example: AT840B-CL-WH-BK-FR




AT849R

8" Reflector with Cross Louver Blade

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 2 × 26W (G24q-3) [TTT]
- 2 × 32W (GX24q-3) [TTT]
- 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 176

Ordering Guide

Reflector	Trim Ring
AT849R -	
CL : Clear	WP : White Plastic
WH : White	BP : Black Plastic
GD : Gold	WH : White
HC : Haze Clear	BK : Black
CP : Champagne	SN : Satin Nickel
OR : Pewter	AN : Antique Nickel
MA : Matte Platinum	PB : Polished Brass




AT846

8" Reflector with Regressed Lens and Baffle

Lamping Options

Compact Fluorescent

- 2 × 13W (G24q-1) [DTT]
- 2 × 18W (G24q-2) [DTT]
- 2 × 26W (G24q-3) [DTT]
- 2 × 26W (G24q-3) [TTT]
- 2 × 32W (GX24q-3) [TTT]
- 2 × 42W (GX24q-4) [TTT]



HOUSING

P. 176

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT846 -			
CL : Clear	WH : White	WP : White Plastic	FR : Fresnel Lens
WH : White	BK : Black	BP : Black Plastic	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	WH : White	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	BK : Black	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	SN : Satin Nickel	SPL : Comfort Linear
OR : Pewter		AN : Antique Nickel	
MA : Matte Platinum		PB : Polished Brass	

Example: AT846-HC-WH-AN-FR



The A4501 is a 4" aperture flat frame-in kit for vertical PAR type metal halide lamps. These are designed for use in non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A4501

4" Flat Frame-in Kit for Vertical HID Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks can be mounted on four sides to allow long-side or short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based PAR type lamps.

Lamping Options

Metal Halide

• PAR20, MR16 Types

* 20 watt


* 39 watt

Trim Options

See pages 183-187

NOT FOR USE IN INSULATED CEILINGS

Dimensions

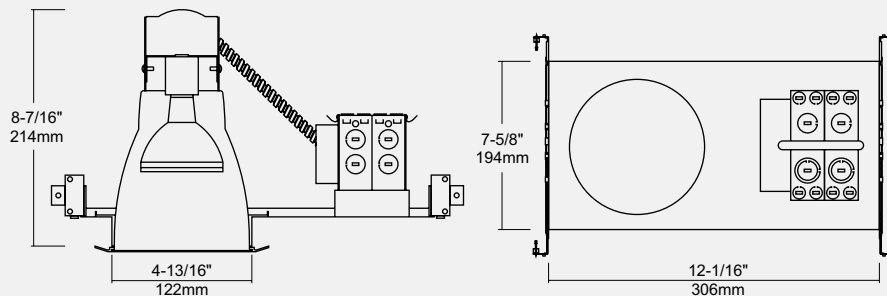

Compatible Lamps

PAR20 (MH), 39W max.

MR16 (MH), 39W max.

Icon Features



5"
127mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A4501 - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
H120 : 120V HPF H347 : 347V HPF	39 : 39 watt	BLANK : Medium base 0 : Open rated

Example: A4501-H120-39



The A4502 is a 4" aperture remodel frame-in kit for vertical PAR type metal halide lamps. These are designed for use in non-insulated ceilings. These housing offers a wide choice of trim types including reflectors, lenses and wall wash trims.

NOT FOR USE IN INSULATED CEILINGS

A4502

4" Remodel Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based PAR type lamps.


Lamping Options

- Metal Halide
- PAR20, MR16 Types
- * 20 watt
- * 39 watt

Trim Options

See pages 183-187


Dimensions

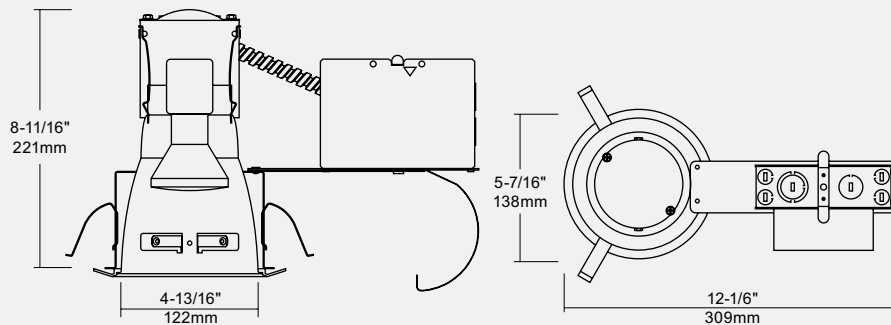

Compatible Lamps

- PAR20 (MH), 39W max.
- MR16 (MH), 39W max.

Icon Features

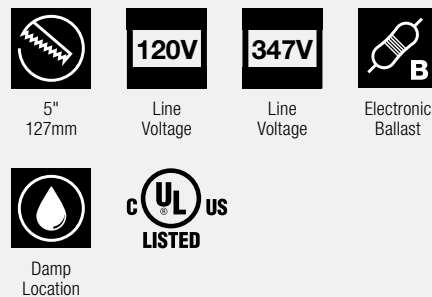

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A4502 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF		0 : Open rated

Example: A4502-H120-39



The A4502C is a 4" aperture model housing with screw down "C" style clips for use in remodelling applications to provide accent and task lighting. For use with a vertical MR16CMH and PAR20CMH lamps.

A4502C

4" Remodel Screw Down Vertical Metal Halide Housing for MR16CMH and PAR20CMH Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. Steel clips provided for quick mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

It accommodates medium-based or GX10-based lamps for use with PAR, MR16 types.

Lamping Options

Metal Halide

- PAR, MR16/GU10 Types
- * 20 watt
- * 39 watt

Optional Accessories


P-4000 / P-4010 new construction mounting plate for use with A4502C housing.

Trim Options

See pages 183-187


NOT FOR USE IN INSULATED CEILINGS

Dimensions

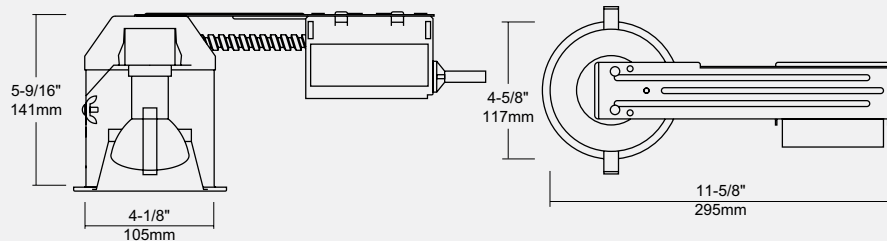

Optional Accessories


P-4000 / P-4010

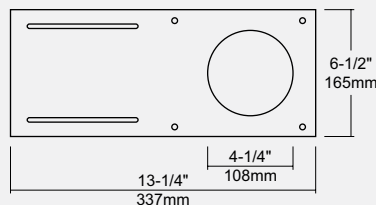

Compatible Lamps

- PAR20 (MH), 39W max.
- MR16 (MH), 39W max.

Icon Features

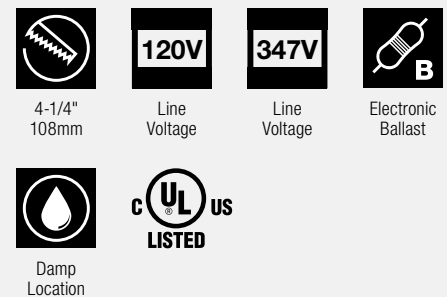

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A4502C - []	- []	- []
H120 : 120V HPF	20 : 20 watt	M : Medium base
	39 : 39 watt	G : GX10 base

Example: A4502C-H120-20



The A4506 is a 4" aperture frame-in kit for vertical PAR type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A4506

4" Architectural Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based PAR type lamps.

Lamping Options

Metal Halide

• PAR20, MR16 Types

* 20 watt

* 39 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 183-187

NOT FOR USE IN INSULATED CEILINGS

Dimensions

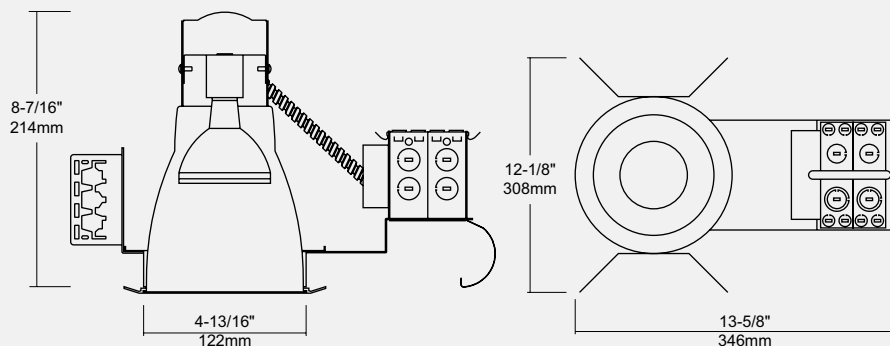

Compatible Lamps

PAR20 (MH), 39W max.

MR16 (MH), 39W max.

Icon Features



5"
127mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage	Options
A4506	-	-	-
	H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
	H347 : 347V HPF		0 : Open rated

Example: A4506-H120-39




AT149R

4" Full Open Reflector

Lamping Options

- Metal Halide
- PAR20 MH, 39W max.
 - MR16 MH, 39W max.



HOUSING

P. 179-182

Ordering Guide

Reflector	Metal Trim Ring
AT149R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT149RF

4" Full Open Self-Flanged Reflector

Lamping Options

- Metal Halide
- PAR20 MH, 39W max.
 - MR16 MH, 39W max.




HOUSING

P. 179-182

Ordering Guide

Reflector
AT149RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

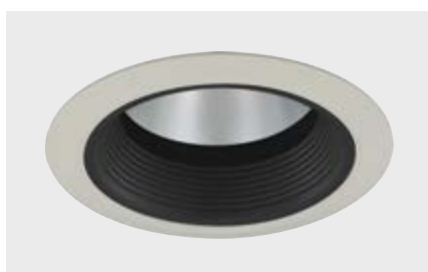


AT140B

4" Reflector with Baffle

Lamping Options

- Metal Halide
- PAR20 MH, 39W max.
 - MR16 MH, 39W max.



HOUSING

P. 179-182

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT140B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		

Example: AT140B-CL-BK-WH




AT146B

4" Reflector with Regressed Lens and Baffle

Lamping Options

- Metal Halide
- PAR20 MH, 39W max.
 - MR16 MH, 39W max.
 - ED17 MH, 70W max.



HOUSING

P. 179-182

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT146B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT146C

4" Reflector with Regressed Lens and Reflector Splay

Lamping Options

- Metal Halide
- PAR20 MH, 39W max.
 - MR16 MH, 39W max.
 - ED17 MH, 70W max.



HOUSING

P. 179-182

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT146C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT146C-CL-CH-WH-FR




AT148

4" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide

- PAR20 MH, 39W max.
- MR16 MH, 39W max.
- ED17 MH, 70W max.



HOUSING

P. 179-182

Ordering Guide

Reflector	Metal Trim Ring
AT148 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT148S

4" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Metal Halide

- PAR20 MH, 39W max.
- MR16 MH, 39W max.
- ED17 MH, 70W max.



HOUSING

P. 179-182

Ordering Guide

Reflector	Metal Trim Ring
AT148S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT141

4" Reflector with Wall Wash Kickplate

Lamping Options

Metal Halide

- PAR20 MH, 39W max.
- MR16 MH, 39W max.
- ED17 MH, 70W max.




HOUSING

P. 179-182

Ordering Guide

Reflector	Metal Trim Ring
AT141 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT141-HC-WH

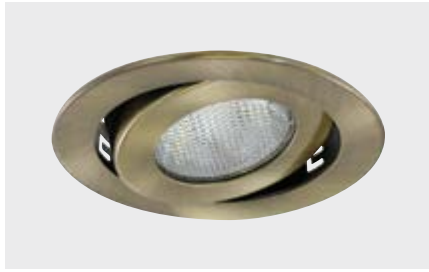

HV4-TH4018

4" Tilting Round Gimbal

Lamping Options

Metal Halide

- PAR20 MH, 39W max.

Ordering Guide

HV4-TH4018 -


WH : White

BK : Black

AB : Antique Brass


BB : Brushed Brass

BN : Brushed Nickel



35°

P. 179-182

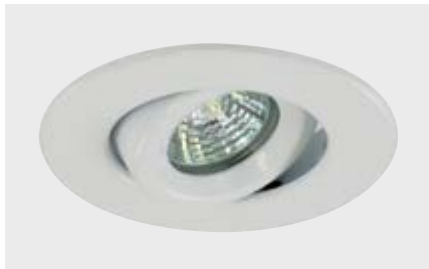

GR-TH18R

4" Tilting Gimbal

Lamping Options

Metal Halide

- MR16 MH, 39W max.

Ordering Guide

GR-TH18R -

WH : White


BK : Black

AB : Antique Brass

BN : Brushed Nickel

FWH : Matte White

STS : Stainless Steel



35°

P. 179-182



GR-TH19

4" Egress / Regress Rotating Downlight or Wall Washer

Lamping Options


Metal Halide

- MR16 MH, 39W max.

Ordering Guide

GR-TH19 -

WH : White



35°

P. 179-182

Example: GR-TH19-WH



GR-TH04

4" Adjustable Eyeball

Lamping Options

Metal Halide

- MR16 MH, 39W max.


Ordering Guide

GR-TH04 -

Metal Trim Ring

WH : White

BK : Black



35°



P. 179-182

Example: GR-TH19



The A6501 is a 6" aperture flat frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings.

A6501

6" Flat Frame-in Kit for Vertical HID Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

- PAR30, ED17, B17 HPS Types

* 39 watt

* 50 watt

* 70 watt


* 100 watt

Trim Options

See pages 191-194

NOT FOR USE IN INSULATED CEILINGS

Dimensions

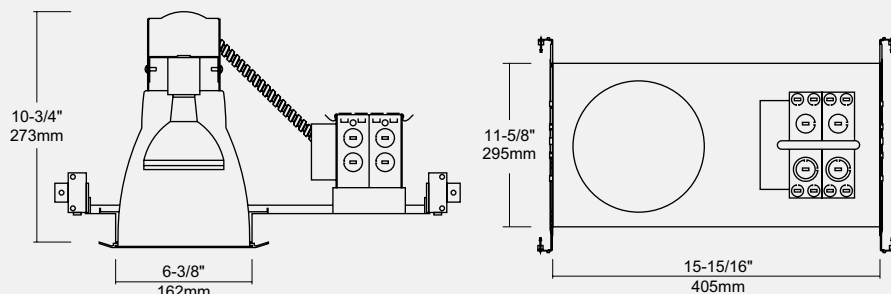

Compatible Lamps

- PAR30 (MH), 100W max.
- HID BD17 (HPS), 100W max.
- HID ED17 (MH), 100W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage	Options
A6501	-	-	-
	H120 : 120V HPF H347 : 347V HPF	39 : 39 watt 50 : 50 watt 70 : 70 watt 100 : 100 watt	BLANK : Medium base 0 : Open rated

Example: A6501-H120-39



The A6502 is a 6" aperture remodel frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

NOT FOR USE IN INSULATED CEILINGS

A6502

6" Remodel Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

- PAR30, ED17, BD17 HPS Types

* 39 watt


* 50 watt

* 70 watt

Trim Options

See pages 191-194


Dimensions

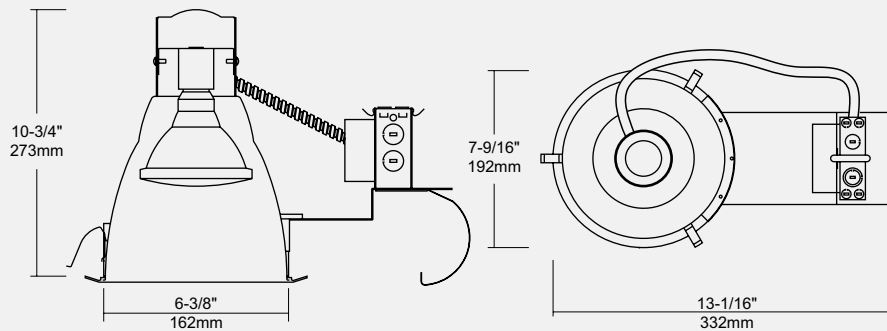

Compatible Lamps

- PAR30 (MH), 70W max.
- HID BD17 (HPS), 70W max.
- HID ED17 (MH), 70W max.

Icon Features

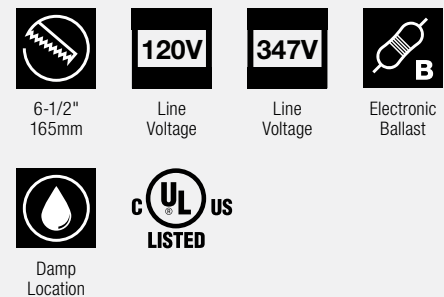

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6502 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	

Example: A6502-H120-39



The A6506 is a 6" aperture frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A6506

6" NON-IC Architectural Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 85°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• PAR30, ED17, BD17 HPS Types

* 39 watt

* 50 watt

* 70 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 191-194

NOT FOR USE IN INSULATED CEILINGS

Dimensions

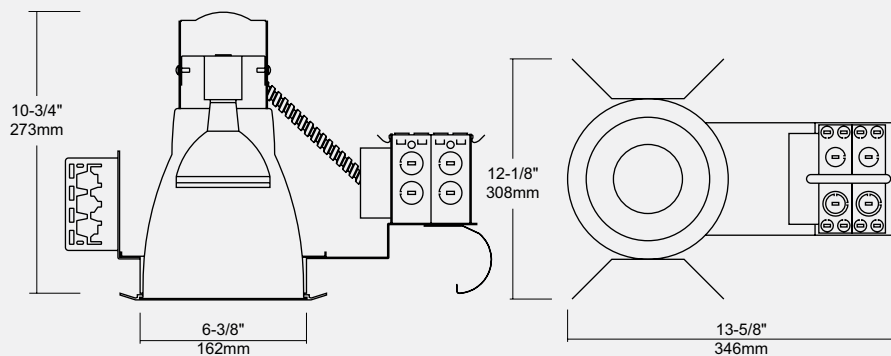

Compatible Lamps

PAR30 (MH), 70W max.

HID BD17 (HPS), 70W max.

HID ED17 (MH), 70W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6506 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	

Example: A6506-H120-39



AT169R

6" Full Open Reflector


Lamping Options

Metal Halide

- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.

Ordering Guide

Reflector	Metal Trim Ring
AT169R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING
P. 188-190



AT169RF

6" Full Open Self-Flanged Reflector


Lamping Options

Metal Halide


- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.

Ordering Guide

Reflector
AT169RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



HOUSING
P. 188-190

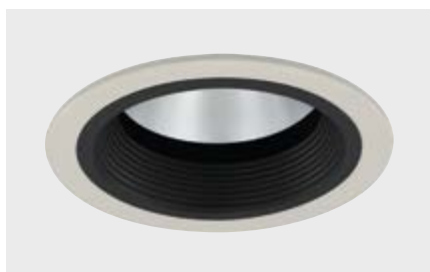

AT160B

6" Reflector with Baffle


Lamping Options

Metal Halide

- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT160B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		



HOUSING
P. 188-190

Example: AT160B-CL-BK-WH




AT166B

6" Reflector with Regressed Lens and Baffle

Lamping Options

- Metal Halide
- PAR30 MH, 70W max.
 - ED17 HPS, 70W max.
 - B17 MH, 70W max.



HOUSING

P. 188-190

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT166B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT166C

6" Reflector with Regressed Lens and Reflector Splay

Lamping Options

- Metal Halide
- PAR30 MH, 70W max.
 - ED17 HPS, 70W max.
 - B17 MH, 70W max.



HOUSING

P. 188-190

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT166C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT166C-CL-CH-WH-FR




AT168

6" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide

- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.



HOUSING

P. 188-190

Ordering Guide

Reflector	Metal Trim Ring
AT168 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT168S

6" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Metal Halide

- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.



HOUSING

P. 188-190

Ordering Guide

Reflector	Metal Trim Ring
AT168S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT161

6" Reflector with Wall Wash Kickplate

Lamping Options

Metal Halide

- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.



HOUSING

P. 188-190

Ordering Guide

Reflector	Metal Trim Ring
AT161 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT161-HC-WH




AT1659R

6" Reflector with Cross Louver Blade

Lamping Options

Metal Halide

- PAR30 MH, 70W max.
- ED17 HPS, 70W max.
- B17 MH, 70W max.



Ordering Guide

	Reflector		Metal Trim Ring
AT1659R	-		-
	CL : Clear		WH : White
	WH : White		BK : Black
	GD : Gold		SN : Satin Nickel
	HC : Haze Clear		AN : Antique Nickel
	CP : Champagne		AC : Antique Copper
	OR : Pewter		UN : Natural Steel
	MA : Matte Platinum		PB : Polished Brass
			MO : Mocha
			CA : Cappuccino
			CH : Chrome

HOUSING

P. 188-190



The A8501 is an 8" aperture flat frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A8501

8" Flat Frame-in Kit for Vertical HID Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

- PAR38, ED17, BD17 HPS Types

* 39 watt

* 50 watt

* 70 watt

* 100 watt

* 150 watt


* 175 watt

Trim Options

See pages 198-201

NOT FOR USE IN INSULATED CEILINGS


Dimensions

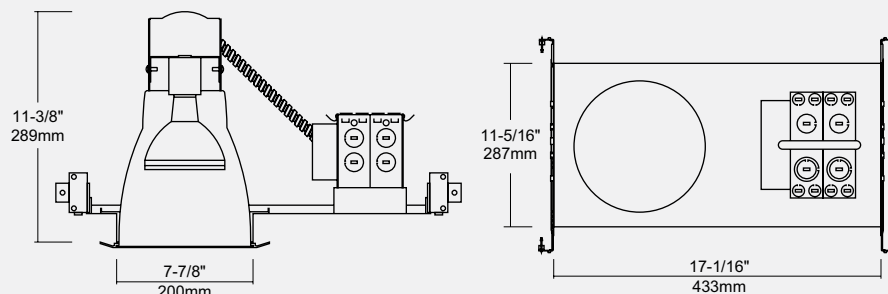

Compatible Lamps

- PAR38 (MH), 100W max.
- HID BD17 (HPS), 150W max.
- HID ED17 (MH), 175W max.

Icon Features

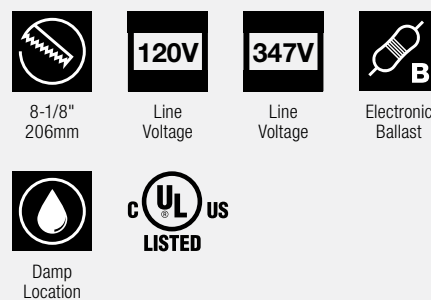

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8501 - - - 		
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	
	100 : 100 watt	
	150 : 150 watt	
	175 : 175 watt	

Example: A8501-H120-39



The A8502 is an 8" aperture remodel frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

NOT FOR USE IN INSULATED CEILINGS

A8502

8" Remodel Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• PAR38, ED17, B17 HPS Types

* 39 watt

* 50 watt

* 70 watt


* 100 watt

* 150 watt

Trim Options

See pages 198-201

Dimensions

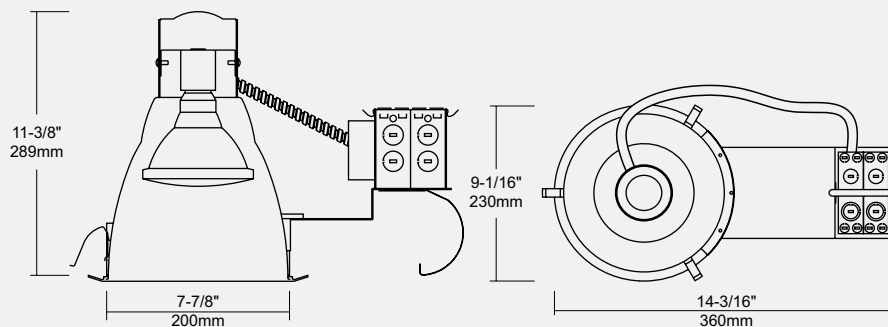

Compatible Lamps



PAR38 (MH), 100W max.



HID B17 (HPS), 150W max.



HID ED17 (MH), 70W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8502 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	
	100 : 100 watt	
	150 : 150 watt	

Example: A8502-H120-39



The A8506 is an 8" aperture frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A8506

8" NON-IC Architectural Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• PAR38, ED17, BD17 HPS Types

* 39 watt

* 50 watt

* 70 watt

* 100 watt

* 150 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 198-201

NOT FOR USE IN INSULATED CEILINGS

Dimensions

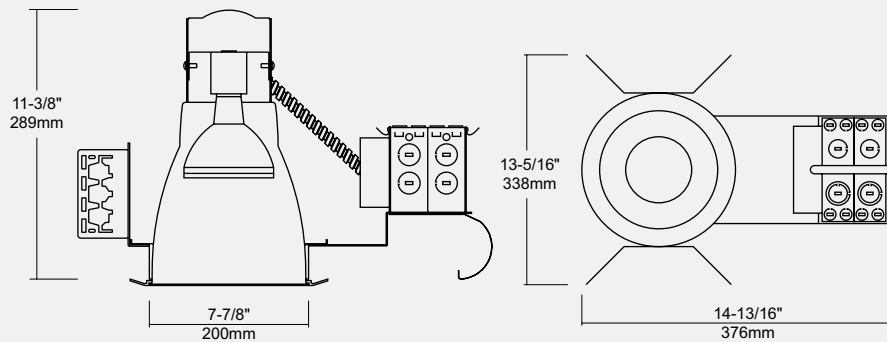

Compatible Lamps

PAR38 (MH), 100W max.

HID BD17 (HPS), 150W max.

HID ED17 (MH), 70W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8506 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	
	100 : 100 watt	
	150 : 150 watt	

Example: A8506-H120-39



AT189R

8" Full Open Reflector


Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

Ordering Guide

Reflector	Metal Trim Ring
AT189R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 195-197



AT189RF

8" Full Open Self-Flanged Reflector


Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

Ordering Guide

Reflector
AT189RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



HOUSING

P. 195-197



AT180B

8" Reflector with Baffle


Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT180B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		



HOUSING

P. 195-197

Example: AT180B-CL-BK-WH




AT186B

8" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.



P. 195-197

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT186B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT186C

8" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.




P. 195-197

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT186C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT186C-CL-CH-WH-FR

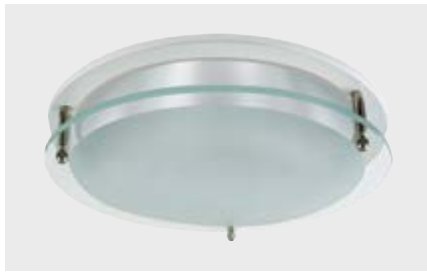

AT188

8" Reflector with Frosted Drop Lens


Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

Ordering Guide

Reflector	Metal Trim Ring
AT188 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 195-197



AT188S

8" Reflector with Frosted Centre Hole Drop Lens


Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

Ordering Guide

Reflector	Metal Trim Ring
AT188S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 195-197



AT181

8" Reflector with Wall Wash Kickplate


Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

Ordering Guide

Reflector	Metal Trim Ring
AT181 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 195-197

Example: AT181-HC-WH




AT1859R

8" Reflector with Cross Louver Blade

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.



HOUSING

P. 197-199

Ordering Guide

Reflector	Metal Trim Ring
AT1859R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT187

8" Reflector with Frosted Lens

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.



HOUSING

P. 195-197

Ordering Guide

Reflector	Metal Trim Ring
AT187 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT187-CL-WH



The A10501 is a 10" aperture flat frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A10501

10" Flat Frame-in Kit for Vertical HID Lamps

Mounting Frame

Constructed of 22ga galvanized steel for optimum rigidity. The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 60°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• PAR38, ED17, BD17 HPS, ED28 Types

* 39 watt

* 50 watt

* 70 watt

* 100 watt

* 150 watt

* 175 watt


* 250 watt

Trim Options

See pages 205-207

NOT FOR USE IN INSULATED CEILINGS


Dimensions

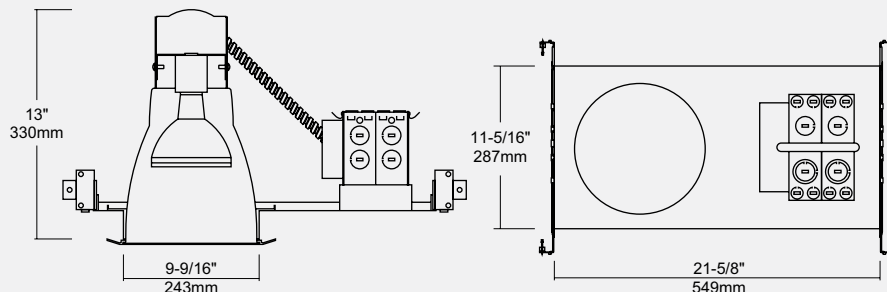

Compatible Lamps

- PAR38 (MH), 100W max.
- HID BD17 (HPS), 150W max.
- HID ED17 (MH), 175W max.
- HID ED28 (MH), 250W max.

Icon Features

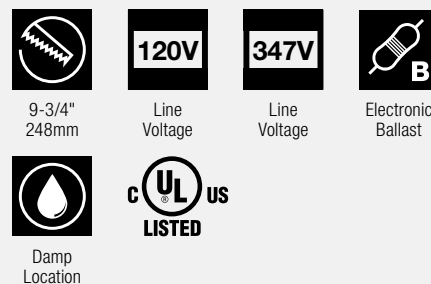

Ordering Guide

A10501	Ballast Voltage	Lamp Wattage	Options
	H120 : 120V HPF H347 : 347V HPF	39 : 39 watt 50 : 50 watt 70 : 70 watt 100 : 100 watt	150 : 150 watt 175 : 175 watt 250 : 250 watt
			BLANK : Medium base MOG : Mogul base 0 : Open rated

Example: A10501-H120-39



The A10502 is a 10" aperture remodel frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

NOT FOR USE IN INSULATED CEILINGS

A10502

10" Remodel Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 60°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• PAR38, ED17, BD17 HPS Types

* 39 watt

* 50 watt

* 70 watt

* 100 watt


* 150 watt

* 175 watt

Trim Options

See pages 205-207

Dimensions

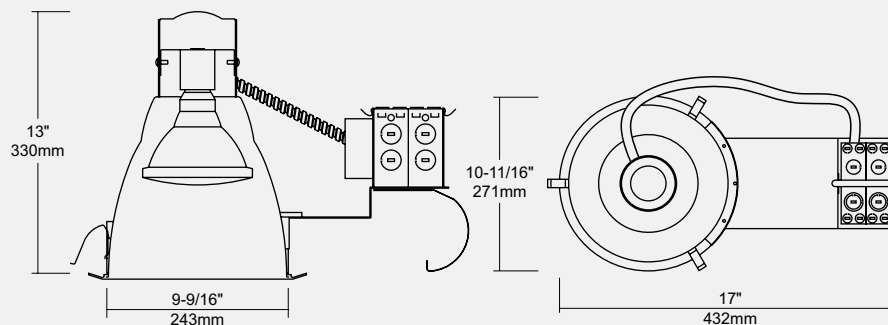

Compatible Lamps

PAR38 (MH), 100W max.

HID BD17 (HPS), 150W max.

HID ED17 (MH), 175W max.

Icon Features



9-3/4"
248mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
US
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10502 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	
	100 : 100 watt	
	150 : 150 watt	
	175 : 175 watt	

Example: A10502-H120-39



The A10506 is a 10" aperture frame-in kit for vertical PAR, ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. These housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A10506

10" NON-IC Architectural Frame-in Kit for Vertical HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 60°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Includes a vertically adjustable lamp holder. It accommodates medium-based lamps for use with PAR, ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• PAR38, ED, BD HPS Types

- * 39 watt
- * 50 watt
- * 70 watt
- * 100 watt
- * 150 watt
- * 175 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 205-207

NOT FOR USE IN INSULATED CEILINGS


Dimensions

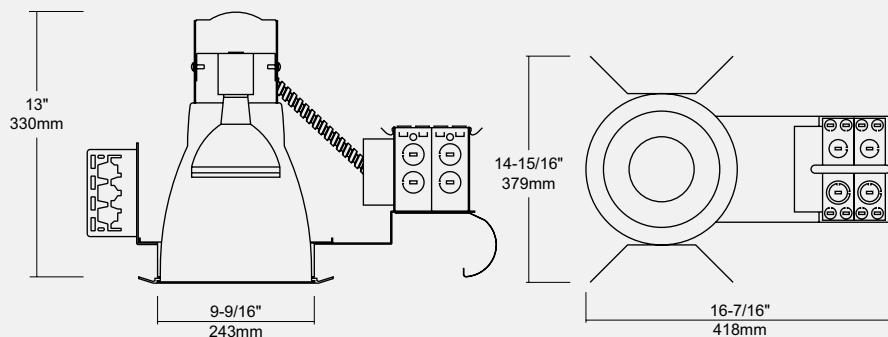

Compatible Lamps

- PAR38 (MH), 100W max.
- HID BD17 (HPS), 150W max.
- HID ED17 (MH), 175W max.

Icon Features

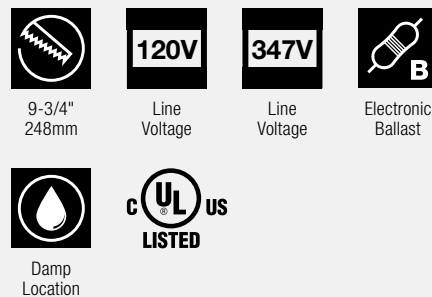

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10506 -	-	-
H120 : 120V HPF	39 : 39 watt	BLANK : Medium base
H347 : 347V HPF	50 : 50 watt	0 : Open rated
	70 : 70 watt	
	100 : 100 watt	
	150 : 150 watt	
	175 : 175 watt	

Example: A10506-H120-39



AT1109R


10" Full Open Reflector

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

- ED28 HPS/MH, 250W max.



P. 202-204

Ordering Guide

Reflector	Metal Trim Ring
AT1109R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



AT1109RF


10" Full Open Self-Flanged Reflector

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.


- ED28 HPS/MH, 250W max.



P. 202-204

Ordering Guide

Reflector
AT1109RF - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

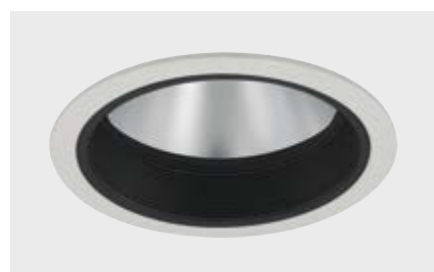

AT1100B


10" Reflector with Baffle

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

- ED28 HPS/MH, 250W max.



P. 202-204

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT1100B - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		

Example: AT1100B-CL-BK-WH



AT196B


10" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

- ED28 HPS/MH, 250W max.




HOUSING

P. 202-204

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT196B - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

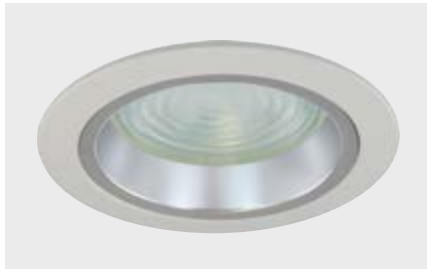

AT196C


10" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

- ED28 HPS/MH, 250W max.



HOUSING

P. 202-204

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT196C - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT196C-CL-CH-WH-FR



AT198


10" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

- ED28 HPS/MH, 250W max.



HOUSING

P. 202-204

Ordering Guide

Reflector	Metal Trim Ring
AT198 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



AT198S


10" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Metal Halide

- PAR38 MH, 100W max.
- ED17 HPS, 150W max.
- B17 MH, 175W max.

- ED28 HPS/MH, 250 watt max.



HOUSING

P. 202-204

Ordering Guide

Reflector	Metal Trim Ring
AT198S - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT198S-CL-WH



The A6601 is a 6" aperture flat frame-in kit for horizontal metal halide lamps. These are designed for use in non-insulated ceilings for natural coloured general or task lighting with an even light beam. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

NOT FOR USE IN INSULATED CEILINGS

A6601

6" Flat Frame-in Kit for Horizontal HID Lamps

Mounting Frame

The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt


* 70 watt

* 100 watt

Trim Options

See pages 211-214

Dimensions

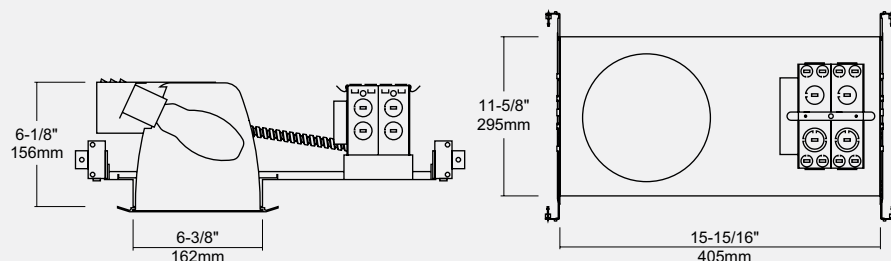

Compatible Lamps

• HID ED17 (MH), 70W max.

• HID BD17 (HPS), 100W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6601 -	-	-
H120 : 120V HPF	50 : 50 watt	BLANK : Medium base
H347 : 347V HPF	70 : 70 watt	0 : Open rated
	100 : 100 watt	

Example: A6601-H120-39



The A6602 is a 6" aperture remodel frame-in kit for horizontal ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. The housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

A6602

6" Remodel Frame-in Kit for Horizontal HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt


* 100 watt

Trim Options

See pages 211-214

NOT FOR USE IN INSULATED CEILINGS

Dimensions

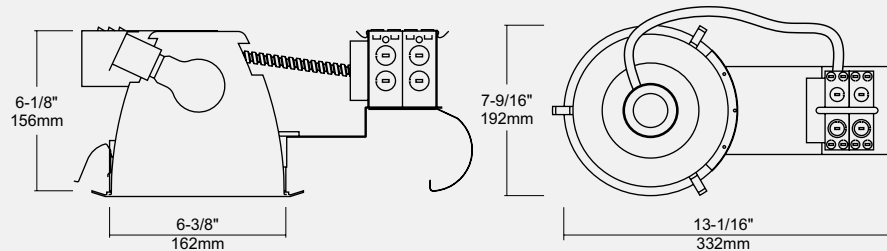

Compatible Lamps

HID ED17 (MH), 70W max.

HID BD17 (HPS), 100W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6602 - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
H120 : 120V HPF H347 : 347V HPF	50 : 50 watt 70 : 70 watt 100 : 100 watt	BLANK : Medium base 0 : Open rated

Example: A6602-H120-50



The A6606 is a 6" aperture frame-in kit for horizontal ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings for general lights on floor and task lighting with a deep concealed lamp.

A6606

6" Architectural Frame-in Kit for Horizontal HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt

* 100 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 211-214

NOT FOR USE IN INSULATED CEILINGS

Dimensions

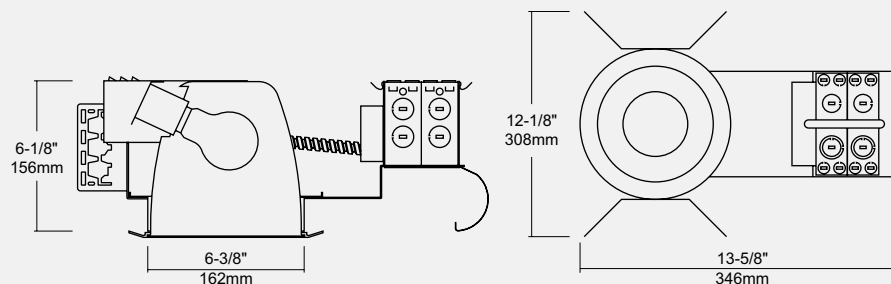

Compatible Lamps

HID ED17 (MH), 70W max.

HID BD17 (HPS), 100W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A6606 -	-	-
H120 : 120V HPF H347 : 347V HPF	50 : 50 watt 70 : 70 watt 100 : 100 watt	BLANK : Medium base 0 : Open rated

Example: A6606-H120-70




AT39R-H

6" Full Open Reflector

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



P. 208-210

Ordering Guide

Reflector	Metal Trim Ring
AT39R-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT39RF-H

6" Full Open Self-Flanged Reflector

Lamping Options

Metal Halide


- ED17 MH, 70W max.
- BD17 HPS, 100W max.



P. 208-210

Ordering Guide

Reflector
AT39RF-H - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

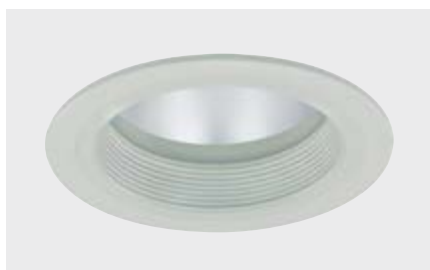


AT30B-H

6" Reflector with Baffle

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



P. 208-210

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT30B-H - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		

Example: AT30B-H-CL-WH-WH




AT36B-H

6" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



HOUSING

P. 208-210

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT36B-H - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			




AT36C-H

6" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



HOUSING

P. 208-210

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT36C-H - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT36C-H-HC-UN-UN-FR




AT38-H

6" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



P. 208-210

Ordering Guide

Reflector	Metal Trim Ring
AT38-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT38S-H

6" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



P. 208-210

Ordering Guide

Reflector	Metal Trim Ring
AT38S-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT31-H

6" Reflector with Wall Wash Kickplate

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.



P. 208-210

Ordering Guide

Reflector	Metal Trim Ring
AT31-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT31-H-CL-WH



AT31F-H

6" Self-Flanged Reflector with Wall Wash Kickplate

Lamping Options


Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 100W max.

Ordering Guide

AT31F-H - Reflector

CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



P. 208-210

Example: AT31F-H-CL



The A8601 is an 8" aperture flat frame-in kit for horizontal metal halide lamps. These are designed for use in non-insulated ceilings for natural coloured general or task lighting. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

A8601

8" Flat Frame-in Kit for Horizontal HID Lamps

Mounting Frame

The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt

* 100 watt


* 150 watt

Trim Options

See pages 218-221

NOT FOR USE IN INSULATED CEILINGS

Dimensions

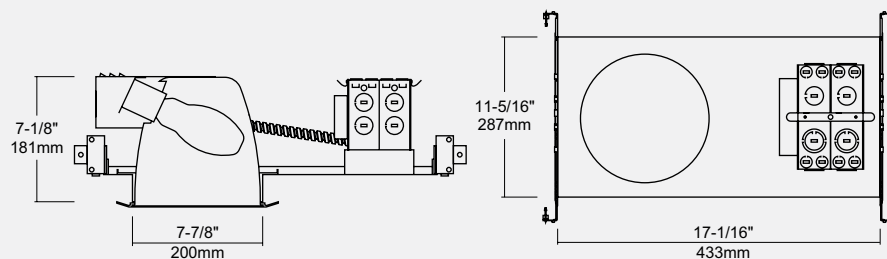

Compatible Lamps

• HID ED17 (MH), 70W max.

• HID BD17 (HPS), 150W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8601 -	-	-
H120 : 120V HPF	50 : 50 watt	BLANK : Medium base
H347 : 347V HPF	70 : 70 watt	0 : Open rated
	100 : 100 watt	
	150 : 150 watt	

Example: A8601-H120-150



The A8602 is an 8" aperture remodel frame-in kit for horizontal ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. The housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

NOT FOR USE IN INSULATED CEILINGS

A8602

8" Remodel Frame-in Kit for Horizontal HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt


* 100 watt

* 150 watt

Trim Options

See pages 218-221

Dimensions

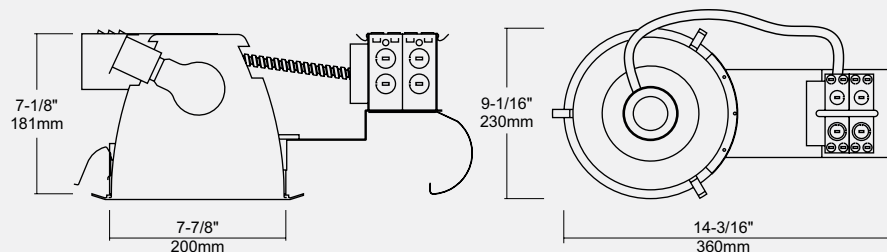

Compatible Lamps

HID ED17 (MH), 70W max.

HID BD17 (HPS), 150W max.

Icon Features



8-1/8"
206mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8602 -	-	-
H120 : 120V HPF	50 : 50 watt	BLANK : Medium base
H347 : 347V HPF	70 : 70 watt	0 : Open rated
	100 : 100 watt	
	150 : 150 watt	

Example: A8602-H347-100



The A8606 is an 8" aperture frame-in kit for horizontal ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings.

A8606

8" Architectural Frame-in Kit for Horizontal HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

- ED17, BD17 Types
- * 50 watt
- * 70 watt
- * 100 watt
- * 150 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 218-221

NOT FOR USE IN INSULATED CEILINGS


Dimensions

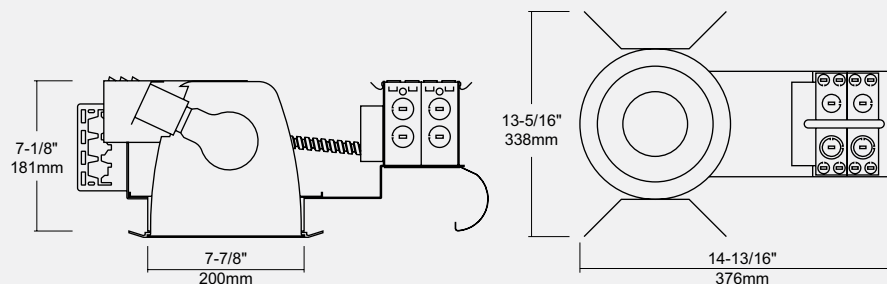

Compatible Lamps

- HID ED17 (MH), 70W max.
- HID BD17 (HPS), 150W max.

Icon Features

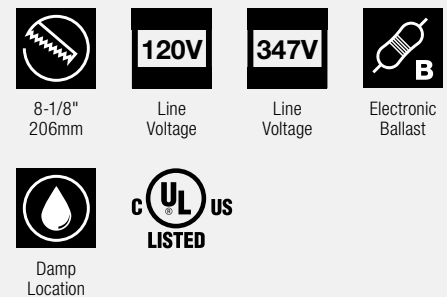

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8606 - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
H120 : 120V HPF H347 : 347V HPF	50 : 50 watt 70 : 70 watt 100 : 100 watt 150 : 150 watt	BLANK : Medium base 0 : Open rated

Example: A8606-H120-50



AT89R-H

8" Full Open Reflector


Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.

Ordering Guide

Reflector	Metal Trim Ring
AT89R-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	UN : Natural Steel
MA : Matte Platinum	PB : Polished Brass



HOUSING

P. 215-217



AT89RF-H

8" Full Open Self-Flanged Reflector


Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.


Ordering Guide

Reflector
AT89RF-H - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum



HOUSING

P. 215-217

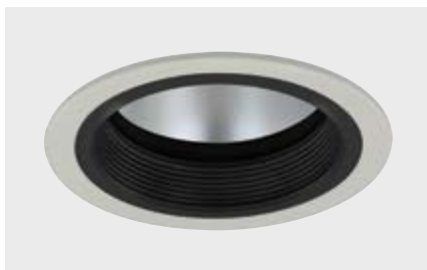

AT80B-H

8" Reflector with Baffle


Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT80B-H - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	UN : Natural Steel
MA : Matte Platinum		PB : Polished Brass



HOUSING

P. 215-217

Example: AT80B-H-HC-WH-WH




AT86B-H

8" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide


- ED17 MH, 70W max.
- BD17 HPS, 150W max.



P. 215-217

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT86B-H - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White	FR : Fresnel Lens
WH : White	BK : Black	BK : Black	AL : Albalite Lens
GD : Gold	CA : Cappuccino	CA : Cappuccino	DR : Drop Opal Lens
HC : Haze Clear	SN : Satin Nickel	SN : Satin Nickel	CT : Frosted Clear Centre
CP : Champagne	CH : Chrome	CH : Chrome	SPL : Comfort Linear
OR : Pewter	AN : Antique Nickel	AN : Antique Nickel	
MA : Matte Platinum	UN : Natural Steel	UN : Natural Steel	
	AC : Antique Copper	AC : Antique Copper	
	PB : Polished Brass	PB : Polished Brass	

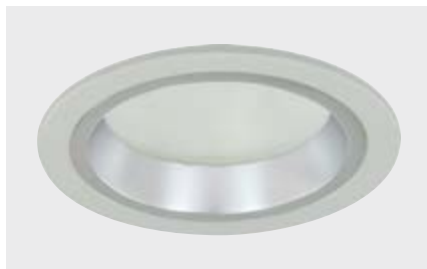


AT86C-H

8" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



P. 215-217

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT86C-H - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White	FR : Fresnel Lens
WH : White	BK : Black	BK : Black	AL : Albalite Lens
GD : Gold	CA : Cappuccino	CA : Cappuccino	DR : Drop Opal Lens
HC : Haze Clear	SN : Satin Nickel	SN : Satin Nickel	CT : Frosted Clear Centre
CP : Champagne	CH : Chrome	CH : Chrome	SPL : Comfort Linear
OR : Pewter	AN : Antique Nickel	AN : Antique Nickel	
MA : Matte Platinum	UN : Natural Steel	UN : Natural Steel	
	AC : Antique Copper	AC : Antique Copper	
	PB : Polished Brass	PB : Polished Brass	

Example: AT86C-H-CL-CH-WH-FR




AT88-H

8" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



HOUSING

P. 215-217

Ordering Guide

Reflector	Metal Trim Ring
AT88-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT88S-H

8" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



HOUSING

P. 215-217

Ordering Guide

Reflector	Metal Trim Ring
AT88S-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT81-H

8" Reflector with Wall Wash Kickplate

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



HOUSING

P. 215-217

Ordering Guide

Reflector	Metal Trim Ring
AT81-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT81-H-CL-WH




AT81F-H

8" Self-Flanged Reflector with Wall Wash Kickplate

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



P. 215-217

Ordering Guide

AT81F-H - **Reflector**

CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum

Example: AT81F-H-CL



The A10601 is a 10" aperture flat frame-in kit for horizontal metal halide lamps. These are designed for use in non-insulated ceilings for natural coloured general or task lighting. Hanger bars with integral T-bar support clip allow for fast and secure installation to T-bar ceilings.

NOT FOR USE IN INSULATED CEILINGS

A10601

10" Flat Frame-in Kit for Horizontal HID Lamps

Mounting Frame

The frame includes cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt


* 100 watt

* 150 watt

Trim Options

See pages 225-227

Dimensions

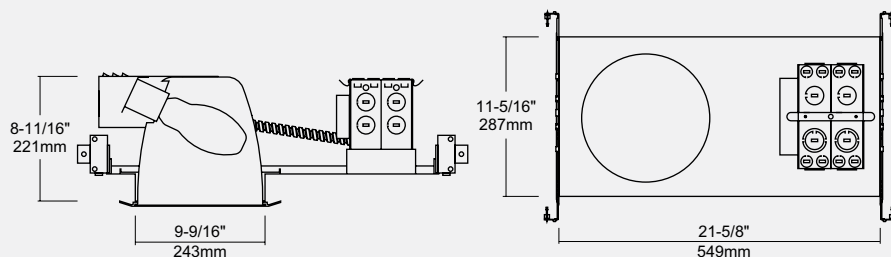

Compatible Lamps

HID ED17 (MH), 70W max.

HID BD17 (HPS), 150W max.

Icon Features



9-3/4"
248mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10601 -	-	-
H120 : 120V HPF	50 : 50 watt	BLANK : Medium base
H347 : 347V HPF	70 : 70 watt	0 : Open rated
	100 : 100 watt	
	150 : 150 watt	

Example: A10601-H347-70



The A10602 is a 10" aperture remodel frame-in kit for horizontal ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings. The housings offer a wide choice of trim types including reflectors, lenses and wall wash trims.

NOT FOR USE IN INSULATED CEILINGS

A10602

10" Remodel Frame-in Kit for Horizontal HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt


* 100 watt

* 150 watt

Trim Options

See pages 225-227

Dimensions

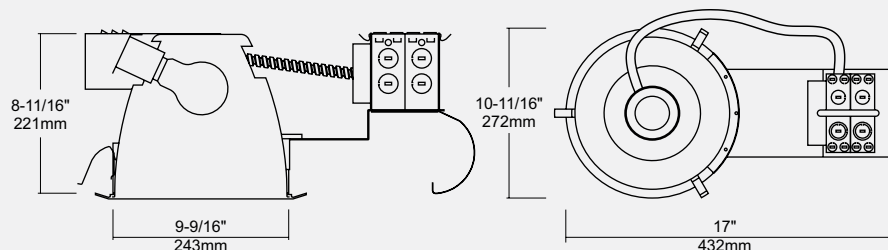

Compatible Lamps

• HID ED17 (MH), 70W max.

• HID BD17 (HPS), 150W max.

Icon Features



9-3/4"
248mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10602 -	-	-
H120 : 120V HPF	50 : 50 watt	BLANK : Medium base
H347 : 347V HPF	70 : 70 watt	0 : Open rated
	100 : 100 watt	
	150 : 150 watt	

Example: A10602-H120-70



The A10606 is a 10" aperture frame-in kit for horizontal ED and BD type metal halide lamps. These are designed for use in non-insulated ceilings.

A10606

10" Architectural Frame-in Kit for Horizontal HID Lamps

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Medium-base ceramic socket. Horizontally positioned lamp holder. It accommodates medium-based lamps for use with ED and BD types.

Lamping Options

Metal Halide / High Pressure Sodium (HPS)

• ED17, BD17 Types

* 50 watt

* 70 watt

* 100 watt

* 150 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 225-227

NOT FOR USE IN INSULATED CEILINGS

Dimensions

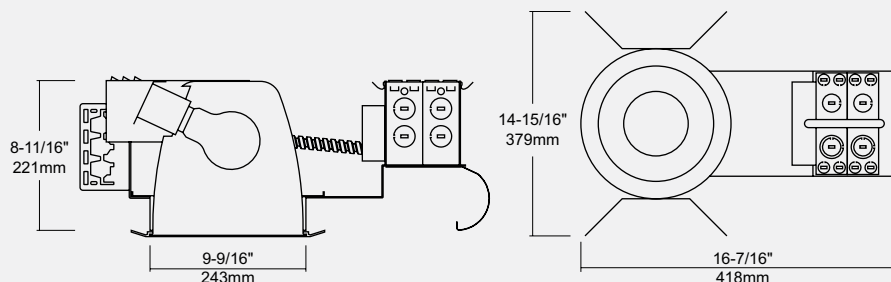

Compatible Lamps

HID ED17 (MH), 70W max.

HID BD17 (HPS), 150W max.

Icon Features



9-3/4"
248mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A10606 -	-	-
H120 : 120V HPF	50 : 50 watt	BLANK : Medium base
H347 : 347V HPF	70 : 70 watt	0 : Open rated
	100 : 100 watt	
	150 : 150 watt	

Example: A10606-H120-150




AT99R-H

10" Full Open Reflector

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.


HOUSING

P. 222-224

Ordering Guide

Reflector	Metal Trim Ring
AT99R-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT99RF-H

10" Full Open Self-Flanged Reflector

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.


HOUSING

P. 222-224

Ordering Guide

Reflector
AT99RF-H - <input type="text"/>
CL : Clear
WH : White
GD : Gold
HC : Haze Clear
CP : Champagne
OR : Pewter
MA : Matte Platinum




AT90B-H

10" Reflector with Baffle

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.


HOUSING

P. 222-224

Ordering Guide

Reflector	Baffle	Metal Trim Ring
AT90B-H - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	WH : White
WH : White	BK : Black	BK : Black
GD : Gold	SN : Satin Nickel	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel
CP : Champagne	AC : Antique Copper	AC : Antique Copper
OR : Pewter	PB : Polished Brass	PB : Polished Brass
MA : Matte Platinum		

Example: AT90B-H-CL-WH-WH




AT96B-H

10" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.




HOUSING

P. 222-224

Ordering Guide

Reflector	Baffle	Metal Trim Ring	Lens Type
AT96B-H - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

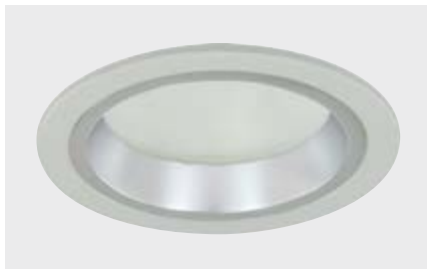


AT96C-H

10" Reflector with Regressed Lens and Reflector Splay

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



HOUSING

P. 222-224

Ordering Guide

Reflector	Reflector Splay	Metal Trim Ring	Lens Type
AT96C-H - <input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT96C-H-HC-CH-WH-FR




AT98-H

10" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



P. 222-224

Ordering Guide

Reflector	Metal Trim Ring
AT98-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT98S-H

10" Reflector with Frosted Centre Hole Drop Lens

Lamping Options

Metal Halide

- ED17 MH, 70W max.
- BD17 HPS, 150W max.



P. 222-224

Ordering Guide

Reflector	Metal Trim Ring
AT98S-H - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT98S-H-CL-WH



The A4706 is a 4-1/2" aperture frame-in kit with upper reflectors for various beam spreads for general and task lighting. A vertical T4.5 (G8.5 base) ceramic metal halide lamp.

NOT FOR USE IN INSULATED CEILINGS

A4706

4" Architectural Frame-in Kit for Vertical T4.5 CMH Lamp

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

G8.5 base ceramic socket acts as a heat sink. Vertically positioned lamp holder controls beam spreads. It accommodates G8.5-based ceramic metal halide for use with T4 lamp.

Upper Reflector

Clear upper reflector is designed with maximum lumen efficiency to reduce glare and rainbow effects. Available in four beam spreads, Pin (10°), Narrow (12°), Medium (25°) and Wide (46°). Upper reflectors are shipped with the housing.

Lamping Options

Metal Halide

- T4.5
- * 39 watt
- * 70 watt


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 229-230

Dimensions

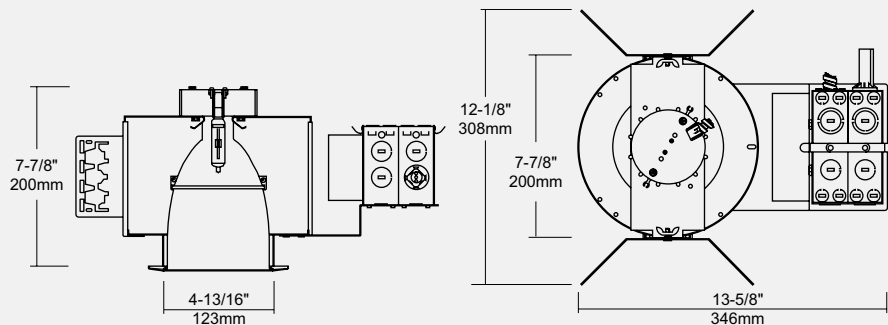

Compatible Lamps

⚡ Metal Halide, T4.5, 70W max.

Icon Features



5"
127mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage	Beam Spread
A4706	-	-	-
	H120 : 120V HPF	39 : 39 watt	PSP : Pin Spot (10°)
	H347 : 347V HPF	70 : 70 watt	NSP : Narrow Spot Beam (12°)
			MED : Medium Spread Beam (25°)
			WFL : Wide Flood (46°)

Example: A4706-H120-39-WFL




AT249R

4" Reflector with Regressed Lens

Lamping Options

Metal Halide
• T4.5, 70W max.



Ordering Guide

Reflector	Trim Ring	Lens Type
AT249R - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		
		FR : Fresnel Lens
		AL : Albalite Lens
		DR : Drop Opal Lens
		CT : Frosted Clear Centre
		SPL : Comfort Linear



P. 228




AT249RF

4" Self-Flanged Reflector with Regressed Lens

Lamping Options

Metal Halide
• T4.5, 70W max.



Ordering Guide

Reflector	Lens Type
AT249RF - <input type="text"/>	<input type="text"/>
CL : Clear	FR : Fresnel Lens
WH : White	AL : Albalite Lens
GD : Gold	DR : Drop Opal Lens
HC : Haze Clear	CT : Frosted Clear Centre
CP : Champagne	SPL : Comfort Linear
OR : Pewter	
MA : Matte Platinum	



P. 228




AT248

4" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide
• T4.5, 70W max.



Ordering Guide

Reflector	Metal Trim Ring
AT248 - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	
	MO : Mocha
	CA : Cappuccino
	CH : Chrome
	UN : Natural Steel



P. 228

Example: AT248-HC-WH




AT246B

4" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide

- T4.5, 70W max.



HOUSING

P. 228

Ordering Guide

Reflector	Baffle	Trim Ring	Lens Type
AT246B -			
CL : Clear	WH : White	WH : White	FR : Fresnel Lens
WH : White	BK : Black	BK : Black	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	SN : Satin Nickel	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	AN : Antique Nickel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	AC : Antique Copper	SPL : Comfort Linear
OR : Pewter	UN : Natural Steel	UN : Natural Steel	
MA : Matte Platinum	CH : Chrome	CH : Chrome	
	PB : Polished Brass	PB : Polished Brass	
	MO : Mocha	MO : Mocha	
	CA : Cappuccino	CA : Cappuccino	

Example: AT246B-HC-WH-WH-FR



The A6706 is a 6" aperture frame-in kit with upper reflectors for various beam spreads for general and task lighting. It accommodates a vertical T6 (G12 base) ceramic metal halide lamp.

A6706

6" Architectural Frame-in Kit for Vertical T6 CMH Lamp

Mounting Frame

Built with 20ga cold-rolled steel mounting ring, painted in black with 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Dimpled spring clips firmly hold reflector in place without damaging the surface of the reflector.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation and Class A sound rated.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against misuse of insulation around the fixture and overheating of the fixture.

Socket Cup/Socket

Aluminum socket cup acts as a heat sink. Vertically positioned lamp holder controls beam spreads. It accommodates G12-based ceramic metal halide for use with T6 lamp.

Upper Reflector

Clear upper reflector is designed with maximum lumen efficiency to reduce glare and rainbow effects. Available in four beam spreads, Pin (10°), Narrow (12°), Medium (25°) and Wide (46°). Upper reflectors are shipped with the housing.

Lamping Options

Metal Halide

- T6
- * 39 watt
- * 70 watt
- * 100 watt

Optional Accessories


ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 232-233

NOT FOR USE IN INSULATED CEILINGS


Dimensions

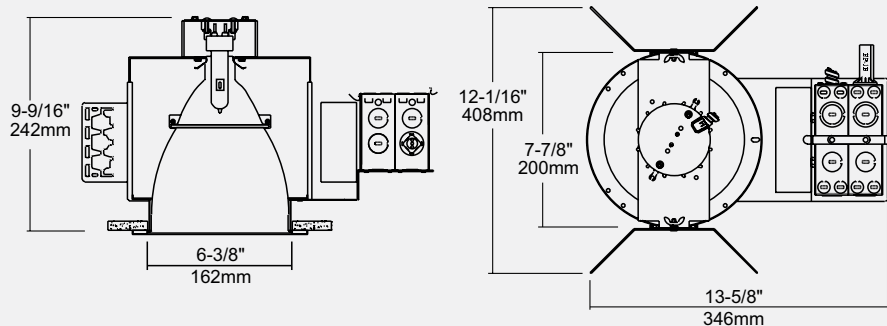

Compatible Lamps

Metal Halide, T6, 100W max.

Icon Features

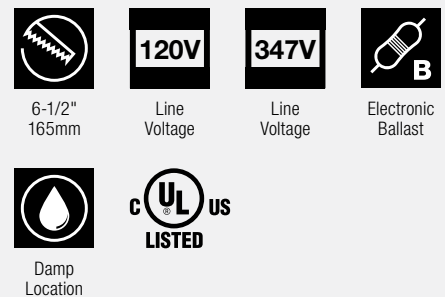

Ordering Guide

	Ballast Voltage	Lamp Wattage	Beam Spread
A6706	-	-	-
	H120 : 120V HPF H347 : 347V HPF	39 : 39 watt 70 : 70 watt 100 : 100 watt	PSP : Pin Spot (10°) NSP : Narrow Spot Beam (12°) MED : Medium Spread Beam (25°) WFL : Wide Flood (46°)

Example: A6706-H120-70-NSP




AT269R

6" Reflector with Regressed Lens

Lamping Options

Metal Halide
• T6, 100W max.



HOUSING

P. 231

Ordering Guide

Reflector	Trim Ring	Lens Type
AT269R -		
CL : Clear	WH : White	MO : Mocha
WH : White	BK : Black	CA : Cappuccino
GD : Gold	SN : Satin Nickel	CH : Chrome
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel
CP : Champagne	AC : Antique Copper	PB : Polished Brass
OR : Pewter		
MA : Matte Platinum		

FR : Fresnel Lens
AL : Albalite Lens
DR : Drop Opal Lens
CT : Frosted Clear Centre
SPL : Comfort Linear




AT269RF

6" Self-Flanged Reflector with Regressed Lens

Lamping Options

Metal Halide
• T6, 100W max.



HOUSING

P. 231

Ordering Guide

Reflector	Lens Type
AT269RF -	
CL : Clear	FR : Fresnel Lens
WH : White	AL : Albalite Lens
GD : Gold	DR : Drop Opal Lens
HC : Haze Clear	CT : Frosted Clear Centre
CP : Champagne	SPL : Comfort Linear
OR : Pewter	
MA : Matte Platinum	




AT268

6" Reflector with Frosted Drop Lens

Lamping Options

Metal Halide
• T6, 100W max.



HOUSING

P. 231

Ordering Guide

Reflector	Metal Trim Ring
AT268 -	
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT268-CL-WH




AT266B

6" Reflector with Regressed Lens and Baffle

Lamping Options

Metal Halide

- T6, 100W max.



P. 231

Ordering Guide


Reflector	Baffle	Trim Ring	Lens Type
AT266B -	-	-	-
CL : Clear	WH : White	MO : Mocha	FR : Fresnel Lens
WH : White	BK : Black	CA : Cappuccino	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	CH : Chrome	DR : Drop Opal Lens
HC : Haze Clear	AN : Antique Nickel	UN : Natural Steel	CT : Frosted Clear Centre
CP : Champagne	AC : Antique Copper	PB : Polished Brass	SPL : Comfort Linear
OR : Pewter			
MA : Matte Platinum			

Example: AT266B-CL-BK-WH-AL



The A5801 is a NON-IC 5" flat frame housing with an internally adjustable lamp holder for PAR20 lamps, which provides directional and wall wash lighting.

Optional Mounting Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A5801

5" Flat Frame Internally Adjustable Wall Wash & Directional for PAR20 Lamps

Mounting Frame

Black painted heavy metal housing and compact frame designed to fit in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Halogen

- PAR20, 50 watt



Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 240-241

Dimensions

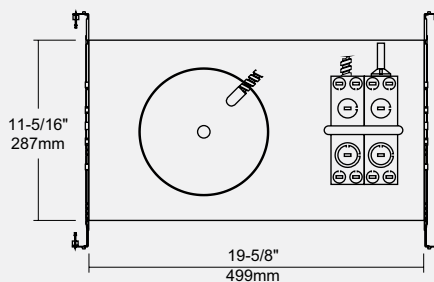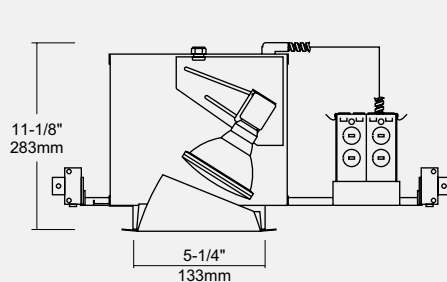

Compatible Lamps

Halogen, PAR20, 50W max.

Icon Features



5-5/16"
135mm



120V
Line
Voltage



Damp
Location





The A5806 is a NON-IC 5" architectural frame with an internally adjustable lamp holder for PAR20 lamps, which provides directional and wall wash lighting.

NOT FOR USE IN INSULATED CEILINGS

A5806

5" Architectural Frame Internally Adjustable Wall Wash & Directional for PAR20 Lamps

Mounting Frame

Black painted heavy metal housing and compact frame designed to fit in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Halogen
• PAR20, 50 watt


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar


Trim Options

See pages 240-241

Dimensions

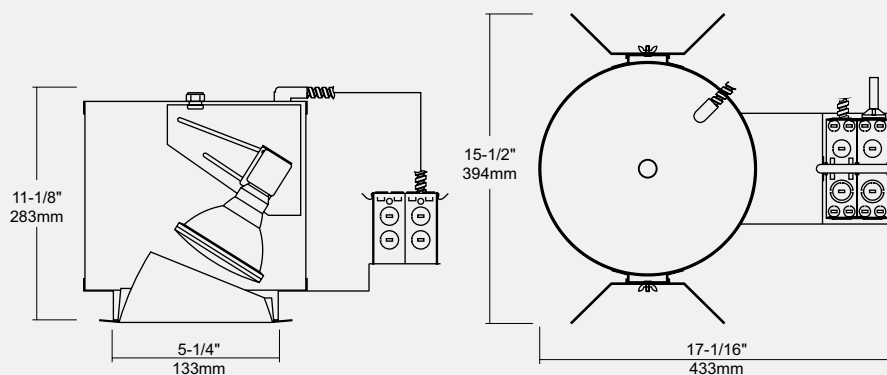

Compatible Lamps

 Halogen, PAR20, 50W max.

Icon Features



5-5/16"
135mm



120V
Line
Voltage




Damp
Location





The A5901 is a NON-IC 5" flat frame housing with an internally adjustable lamp holder for MR16 and PAR20 metal halide lamps, which provides directional and wall wash lighting.

Optional Mounting
Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A5901

5" Flat Frame Internally Adjustable Wall Wash & Directional for MR16, PAR 20 CMH Lamps

Mounting Frame

Black painted heavy metal housing and compact frame designed to fit in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

- Ceramic Metal Halide (CMH)
- MR16, 20 watt
 - PAR20, 39 watt


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 240-241


Dimensions

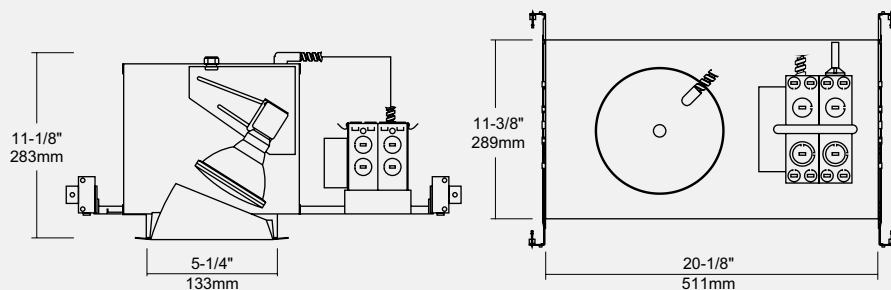

Compatible Lamps

- Ceramic Metal Halide, MR16, 20W max.
- Ceramic Metal Halide, PAR20, 39W max.

Icon Features

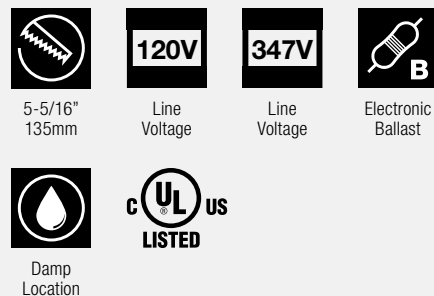

Ordering Guide

	Ballast Voltage	Lamp Wattage	Options
A5901	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H120 : 120V HPF H347 : 347V HPF	20 : 20 watt 39 : 39 watt	CB : Channel Bracket

Example: A5901-H120-39



The A5906 is a NON-IC 5" architectural frame with an internally adjustable lamp holder for PAR20 metal halide lamps, which provides directional and wall wash lighting.

A5906

5" Architectural Frame Internally Adjustable Wall Wash & Directional for PAR20 CMH Lamps

Mounting Frame

Black painted heavy metal housing and compact frame designed to fit in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options


Ceramic Metal Halide (CMH)
• PAR20, 39 watt

Trim Options

See pages 240-241

NOT FOR USE IN INSULATED CEILINGS

Dimensions

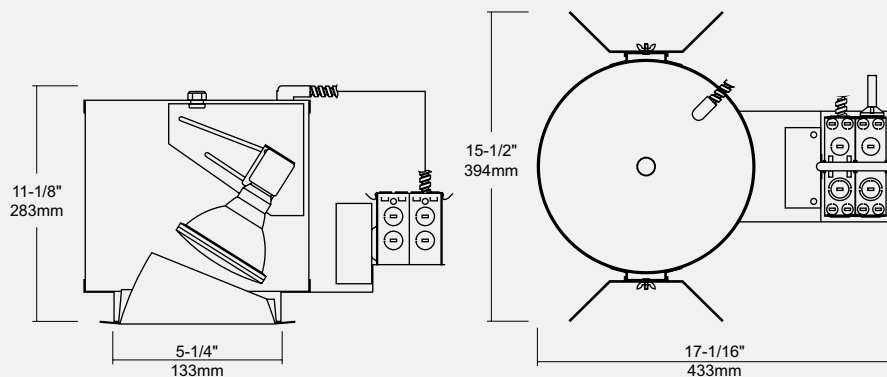

Compatible Lamps

Ceramic Metal Halide, PAR20, 39W max.

Icon Features



5-5/16"
135mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
US
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage
A5906 -		
	H120 : 120V HPF	39 : 39 watt
	H347 : 347V HPF	

Example: A5906-H120-39



The A5916 is a NON-IC 5" architectural frame with an internally adjustable lamp holder for T4.5 metal halide lamps, which provides directional and wall wash lighting.

A5916

5" Architectural Frame Internally Adjustable Wall Wash & Directional for T4.5 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

G8.5-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Reflector

Specular clear reflector available with various beam spreads (pin spot – 10°, narrow spot – 12°, medium spread – 25°, wide flood – 46°).

Lamping Options

Ceramic Metal Halide (CMH)


- T4.5
- * 39 watt
- * 70 watt

Trim Options

See pages 240-241

NOT FOR USE IN INSULATED CEILINGS

Dimensions

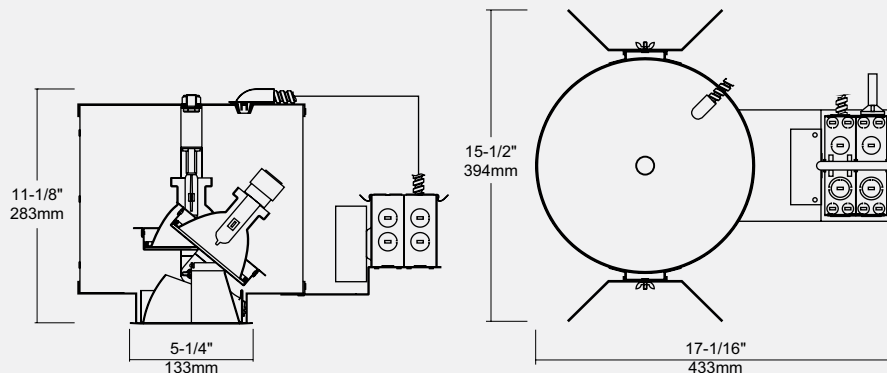

Compatible Lamps

⚡ Ceramic Metal Halide, T4.5, 70W max.

Icon Features



5-5/16"
135mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A5916 -	-	-
H120 : 120V HPF	39 : 39 watt	PSP : Pin Spot (10°)
H347 : 347V HPF	70 : 70 watt	NSP : Narrow Spot Beam (12°)
		MED : Medium Spread Beam (25°)
		WFL : Wide Flood (46°)

Example: A5916-H120-70-NSP



The A5826 is a NON-IC 5" architectural frame housing with an internally adjustable lamp holder for MR16 12V lamps, which provides directional and wall wash lighting.

A5826

5" Architectural Frame Internally Adjustable Wall Wash & Directional for MR16 12V Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Magnetic metal halide 120V High Power Factor ballast with 120V input at 50/60 Hz operation and Class A sound-rated.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Constructed aluminum bi-pin socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Halogen


- MR16 12V
- * 50 watt
- * 75 watt

Trim Options

See pages 240-241

NOT FOR USE IN INSULATED CEILINGS


Dimensions

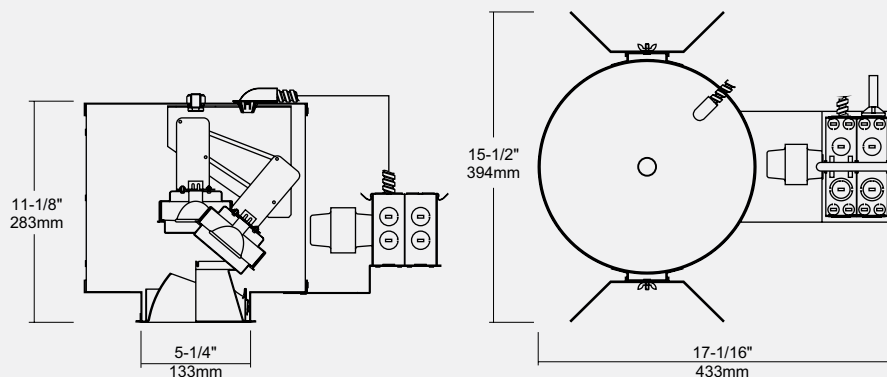

Compatible Lamps

Halogen, MR16 (GU5.3), 75W max.

Icon Features

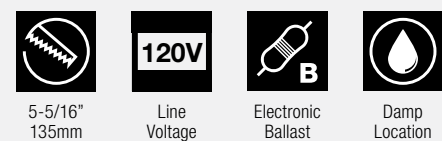

Ordering Guide

	Ballast Voltage	Lamp Wattage
A5826 -		
	H120 : 120V Magnetic	50 : 50 watt 75 : 75 watt

Example: A5826-H120-50



AT525R


5" Slope Reflector

Lamping Options

- PAR20 Halogen, 50W max.
- PAR20 CMH, 39W max.
- T4.5 CMH, 70W max.
- MR16 12V Halogen, 75W max.

Ordering Guide

Reflector	Metal Trim Ring
AT525R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING

P. 234-239



AT525RG


5" Slope Reflector with Lens

Lamping Options

- PAR20 Halogen, 50W max.
- PAR20 CMH, 39W max.
- T4.5 CMH, 70W max.
- MR16 12V Halogen, 75W max.

Ordering Guide

Reflector	Metal Trim Ring	Lens Type
AT525RG - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	FR : Fresnel Lens
WH : White	BK : Black	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	AS : All Sanded Lens
HC : Haze Clear	AN : Antique Nickel	CL : Clear Lens
CP : Champagne	AC : Antique Copper	CV : Convex Prismatic Lens
OR : Pewter	PB : Polished Brass	SPL : Comfort Linear
MA : Matte Platinum		



HOUSING

P. 234-239



AT550R


5" Straight Reflector

Lamping Options

- PAR20 Halogen, 50W max.
- PAR20 CMH, 39W max.
- T4.5 CMH, 70W max.
- MR16 12V Halogen, 75W max.

Ordering Guide

Reflector	Metal Trim Ring
AT550R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	



HOUSING


P. 234-239

Example: AT550R-CL-BK



The A6801 is a NON-IC 6" flat frame housing with an internally adjustable lamp holder for PAR30 lamps, which provides directional and wall wash lighting.

Optional Mounting
Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A6801

6" Flat Frame Internally Adjustable Wall Wash & Directional for PAR30 Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Halogen

- PAR30
- * 150 watt



Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 247-248

Dimensions

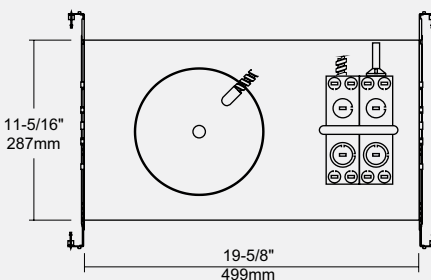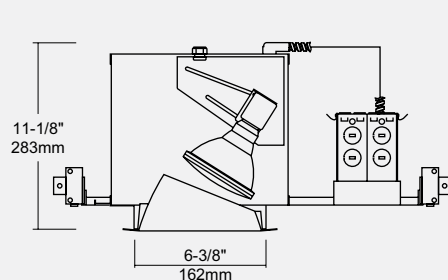

Compatible Lamps

Halogen, PAR30, 150W max.

Icon Features



5-5/16"
135mm



120V
Line
Voltage



Damp
Location



c **UL** **US**
LISTED



The A6806 is a NON-IC 6" architectural frame with an internally adjustable lamp holder for PAR30 lamps, which provides directional and wall wash lighting.

NOT FOR USE IN INSULATED CEILINGS

A6806

6" Architectural Frame Internally Adjustable Wall Wash & Directional for PAR30 Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options


Halogen

- PAR30
- * 150 watt


Trim Options

See pages 247-248


Dimensions

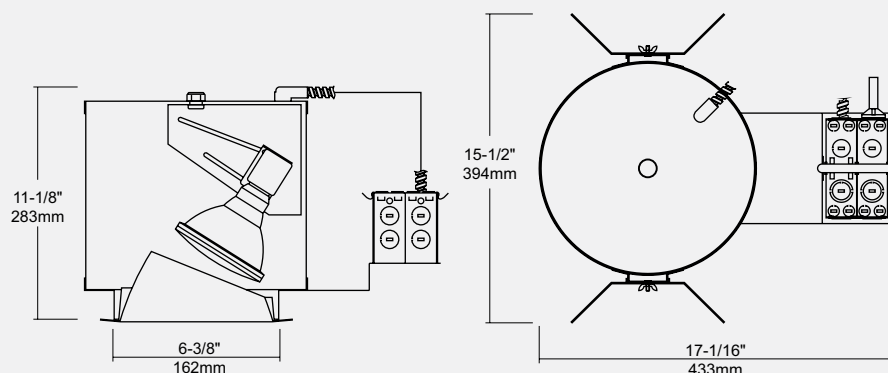

Compatible Lamps

 Halogen, PAR30, 150W max.


Icon Features





The A6901 is a NON-IC 6" flat frame housing with an internally adjustable lamp holder for PAR30 metal halide lamps, which provides directional and wall wash lighting.

Optional Mounting Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A6901

6" Flat Frame Internally Adjustable Wall Wash & Directional Metal Halide for PAR30 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side tracks.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Ceramic Metal Halide (CMH)

- PAR30
- * 39 watt
- * 70 watt


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 247-248


Dimensions

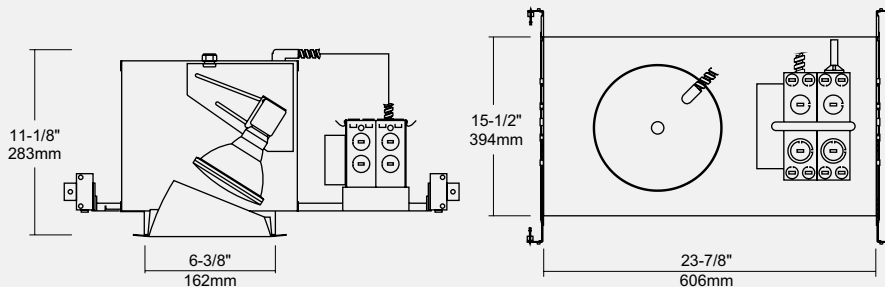

Compatible Lamps

Ceramic Metal Halide, PAR30, 70W max.

Icon Features

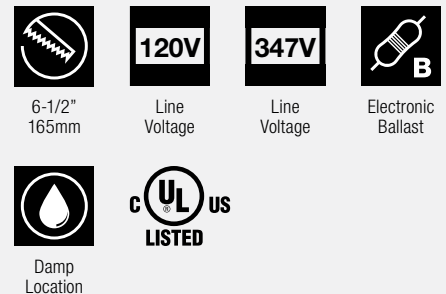

Ordering Guide

	Ballast Voltage	Lamp Wattage	Options
A6901	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H120 : 120V HPF H347 : 347V HPF	39 : 39 watt 70 : 70 watt	CB : Channel Bracket

Example: A6901-H120-50



The A6906 is a NON-IC 6" architectural frame with an internally adjustable lamp holder for PAR30 metal halide lamps, which provides directional and wall wash lighting.

A6906

6" Architectural Frame Internally Adjustable Wall Wash & Directional for PAR30 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Ceramic Metal Halide (CMH)

• PAR30

* 39 watt


* 70 watt

Trim Options

See pages 247-248

NOT FOR USE IN INSULATED CEILINGS

Dimensions

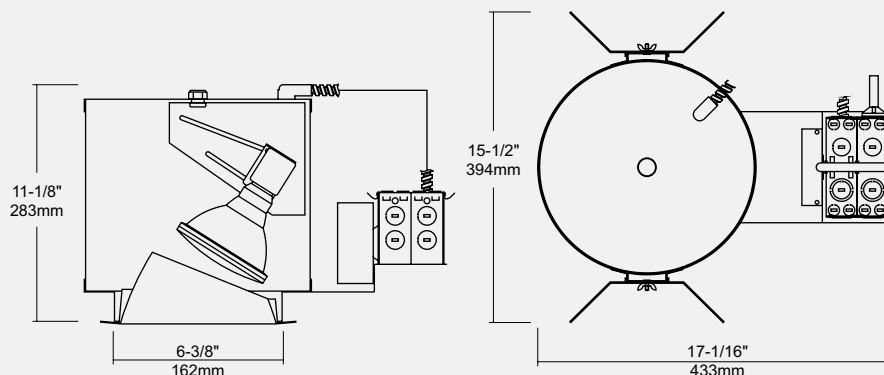

Compatible Lamps

Ceramic Metal Halide, PAR30, 70W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
US
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage
A6906 -		
	H120 : 120V HPF	39 : 39 watt
	H347 : 347V HPF	70 : 70 watt

Example: A6906-H120-50



The A6916 is a NON-IC 6" architectural frame with an internally adjustable lamp holder for T4.5 and T6 metal halide lamps, which provides directional and wall wash lighting.

A6916

6" Architectural Frame Internally Adjustable Wall Wash & Directional for T4.5 or T6 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

G8.5 and G12-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Reflector

Specular clear reflector available with various beam spreads (pin spot – 10°, narrow spot – 12°, medium spread – 25°, wide flood – 46°).

Lamping Options

Ceramic Metal Halide (CMH)

- T4.5, T6

* 39 watt

* 70 watt


* 150 watt

Trim Options

See pages 247-248

NOT FOR USE IN INSULATED CEILINGS

Dimensions

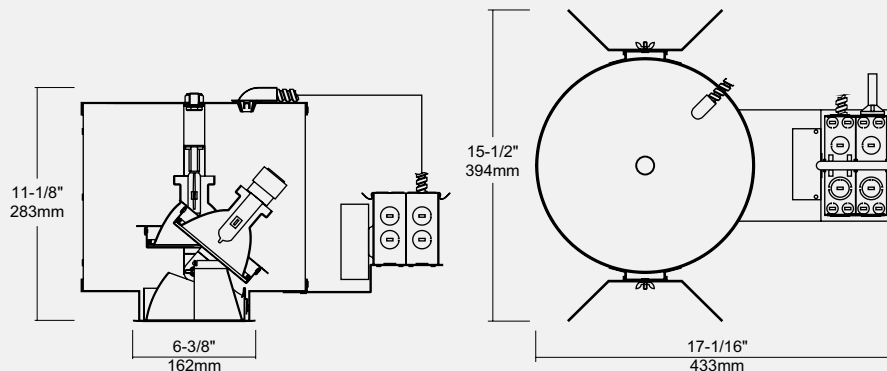

Compatible Lamps

⚡ Ceramic Metal Halide, T4.5, 70W max.

⚡ Ceramic Metal Halide, T6, 150W max.

Icon Features



6-1/2"
165mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

Ballast Voltage	Lamp Type	Lamp Wattage	Options
A6916 -	-	-	-
H120 : 120V HPF H347 : 347V HPF	T4 : T4.5 CMH T6 : T6 CMH	39 : 39 watt 70 : 70 watt 150 : 150 watt	PSP : Pin Spot (10°) NSP : Narrow Spot Beam (12°) MED : Medium Spread Beam (25°) WFL : Wide Flood (46°)

Example: A6916-H120-T4-70-WFL




AT625R

6" Slope Reflector

Lamping Options

- PAR30 Halogen, 150W max.
- PAR30 CMH, 70W max.
- T4.5 CMH, 70W max.
- T6 CMH, 150W max.



Ordering Guide

Reflector	Metal Trim Ring
AT625R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

HOUSING

P. 242-246




AT625RG

6" Slope Reflector with Lens

Lamping Options

- PAR30 Halogen, 150W max.
- PAR30 CMH, 70W max.
- T4.5 CMH, 70W max.
- T6 CMH, 150W max.



Ordering Guide

Reflector	Metal Trim Ring	Lens Type
AT625RG - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	FR : Fresnel Lens
WH : White	BK : Black	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	AS : All Sanded Lens
HC : Haze Clear	AN : Antique Nickel	CL : Clear Lens
CP : Champagne	AC : Antique Copper	CV : Convex Prismatic Lens
OR : Pewter	PB : Polished Brass	SPL : Comfort Linear
MA : Matte Platinum		

HOUSING

P. 242-246




AT655R

6" Straight Reflector

Lamping Options

- PAR30 Halogen, 150W max.
- PAR30 CMH, 70W max.
- T4.5 CMH, 70W max.
- T6 CMH, 150W max.



Ordering Guide

Reflector	Metal Trim Ring
AT655R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

HOUSING


P. 242-246

Example: AT655R-CL-BK



The A8801 is a NON-IC 8" flat frame housing with an internally adjustable lamp holder for PAR38 lamps, which provides directional and wall wash lighting.

Optional Mounting Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A8801

8" Flat Frame Internally Adjustable Wall Wash & Directional for PAR38 Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Halogen

- PAR38
- * 150 watt



Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 254-255

Dimensions

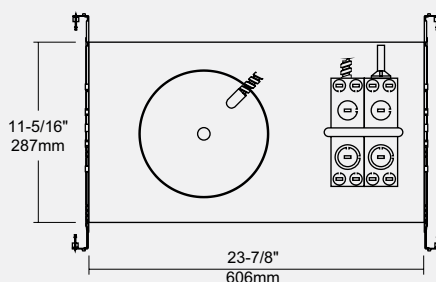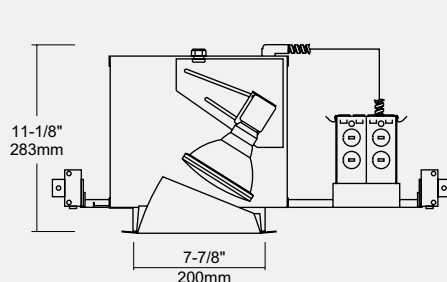

Compatible Lamps

- Halogen, PAR38, 150W max.

Icon Features



8-1/16"
205mm



Line
Voltage



Damp
Location





The A8806 is a NON-IC 8" architectural frame with an internally adjustable lamp holder for PAR38 lamps, which provides directional and wall wash lighting.

NOT FOR USE IN INSULATED CEILINGS

A8806

8" Architectural Frame Internally Adjustable Wall Wash & Directional for PAR38 Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.


Lamping Options

Halogen
• PAR38
* 150 watt

Trim Options

See pages 254-255

Dimensions

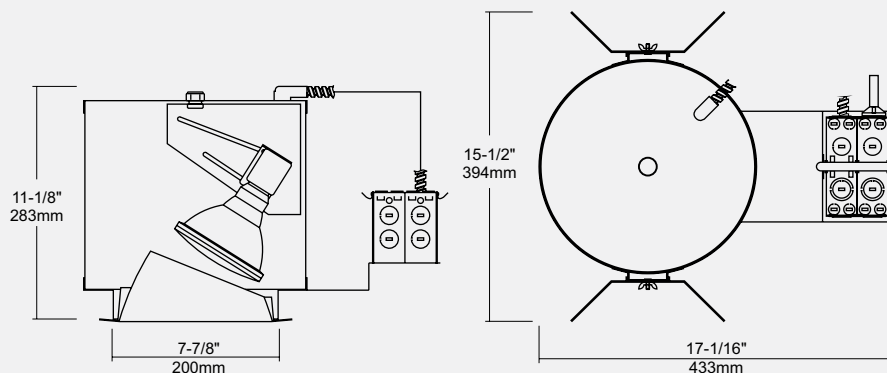

Compatible Lamps

Halogen, PAR38, 150W max.

Icon Features



8-1/16"
205mm



Line
Voltage




Damp
Location





The A8901 NON-IC 8" flat frame housing with an internally adjustable lamp holder for PAR38 metal halide lamps, which provides directional and wall wash lighting.

Optional Mounting Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A8901

8" Flat Frame Internally Adjustable Wall Wash & Directional Metal Halide for PAR38 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Ceramic Metal Halide (CMH)

- PAR38
- * 70 watt
- * 100 watt


Optional Accessories

ALB-27 : 27" A-line linear hanger bar

Trim Options

See pages 254-255

Dimensions

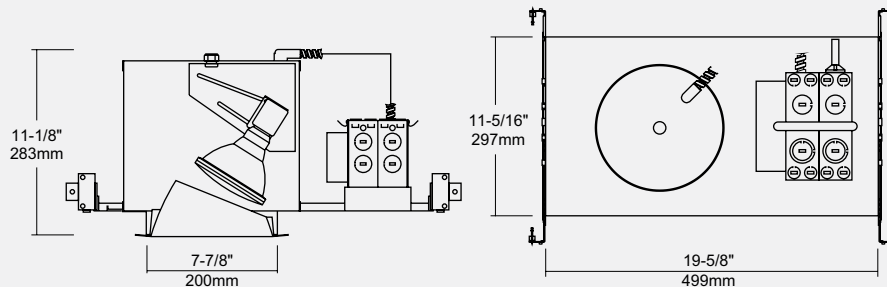

Compatible Lamps

Ceramic Metal Halide, PAR38, 100W max.

Icon Features



8-1/16"
205mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage	Options
A8901	-	-	-
	H120 : 120V HPF H347 : 347V HPF	70 : 70 watt 100 : 100 watt	CB : Channel Bracket

Example: A8901-H120-50



The A8906 is a NON-IC 8" architectural frame with an internally adjustable lamp holder for PAR38 metal halide lamps, which provides directional and wall wash lighting.

A8906

8" Architectural Frame Internally Adjustable Wall Wash & Directional for PAR38 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

Medium-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Lamping Options

Ceramic Metal Halide (CMH)

• PAR38

* 70 watt


* 100 watt

Trim Options

See pages 254-255

NOT FOR USE IN INSULATED CEILINGS

Dimensions

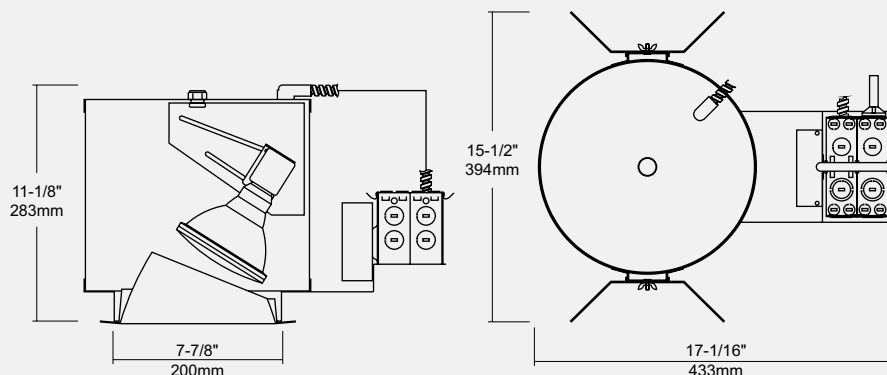

Compatible Lamps

Ceramic Metal Halide, PAR38, 100W max.

Icon Features



8-1/16"
205mm



Line
Voltage



Line
Voltage



Electronic
Ballast



Damp
Location



UL
LISTED

Ordering Guide

	Ballast Voltage	Lamp Wattage
A8906 -		
	H120 : 120V HPF	70 : 70 watt
	H347 : 347V HPF	100 : 100 watt

Example: A8906-H120-50



The A8916 is a NON-IC 8" architectural frame with an internally adjustable lamp holder for T6 metal halide lamps, which provides directional and wall wash lighting.

A8916

8" Architectural Frame Internally Adjustable Wall Wash & Directional for T6 CMH Lamps

Mounting Frame

Black-painted heavy metal housing and compact frame design fits in commercial / architectural construction. It has 1-5/8" (41mm) deep collar that can be used for various thicknesses of ceiling material.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 75°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Vertical adjustable architectural frame bracket accepts C-channel, EMT conduit, and ALB-27 A-Line hanger bars.

Electrical

Integral High Power Factor (HPF) class A electronic ballast with 120 or 347V input at 50/60 Hz operation.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

G12-base ceramic socket, attached to adjustable bracket, provides 358° rotation and 0 ~ 42° tilt with positive locking.

Reflector

Specular clear reflector available with various beam spreads (pin spot – 10°, narrow spot – 12°, medium spread – 25°, wide flood – 46°).

Lamping Options

Ceramic Metal Halide (CMH)


- T6
- * 39 watt
- * 70 watt
- * 150 watt

Trim Options

See pages 254-255

NOT FOR USE IN INSULATED CEILINGS


Dimensions

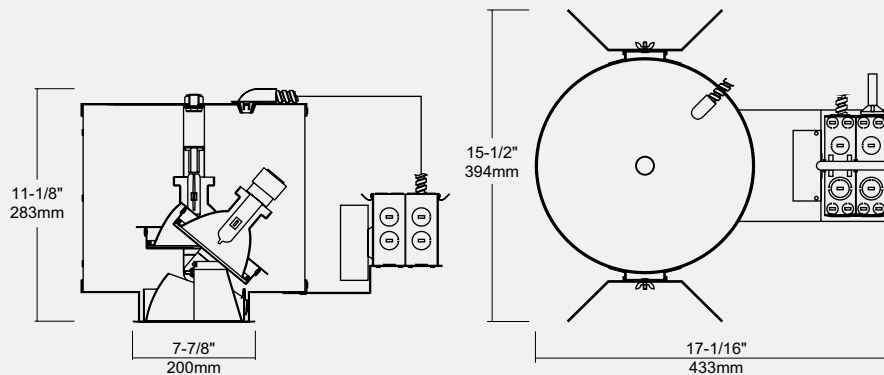

Compatible Lamps

Ceramic Metal Halide, T6, 150W max.

Icon Features

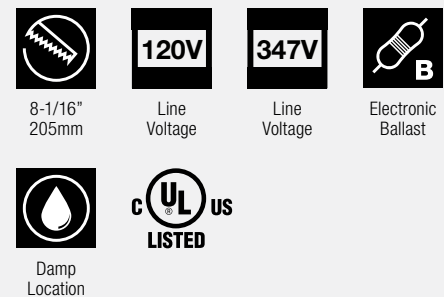

Ordering Guide

Ballast Voltage	Lamp Wattage	Options
A8916 -	-	-
H120 : 120V HPF	39 : 39 watt	PSP : Pin Spot (10°)
H347 : 347V HPF	70 : 70 watt	NSP : Narrow Spot Beam (12°)
	150 : 150 watt	MED : Medium Spread Beam (25°)
		WFL : Wide Flood (46°)

Example: A8916-H120-70




AT825R

8" Slope Reflector

Lamping Options

- PAR38 Halogen, 150W max.
- PAR38 CMH, 100W max.
- T6 CMH, 150W max.



HOUSING

P. 249-253

Ordering Guide

Reflector	Metal Trim Ring
AT825R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	




AT825RG

8" Slope Reflector with Lens

Lamping Options

- PAR38 Halogen, 150W max.
- PAR38 CMH, 100W max.
- T6 CMH, 150W max.



HOUSING

P. 249-253

Ordering Guide

Reflector	Metal Trim Ring	Lens Type
AT825RG - <input type="text"/>	<input type="text"/>	<input type="text"/>
CL : Clear	WH : White	FR : Fresnel Lens
WH : White	BK : Black	AL : Albalite Lens
GD : Gold	SN : Satin Nickel	AS : All Sanded Lens
HC : Haze Clear	AN : Antique Nickel	CL : Clear Lens
CP : Champagne	AC : Antique Copper	CV : Convex Prismatic Lens
OR : Pewter	PB : Polished Brass	SPL : Comfort Linear
MA : Matte Platinum		




AT855R

8" Straight Reflector

Lamping Options

- PAR38 Halogen, 150W max.
- PAR38 CMH, 100W max.
- T6 CMH, 150W max.



HOUSING

P. 249-253

Ordering Guide


Reflector	Metal Trim Ring
AT855R - <input type="text"/>	<input type="text"/>
CL : Clear	WH : White
WH : White	BK : Black
GD : Gold	SN : Satin Nickel
HC : Haze Clear	AN : Antique Nickel
CP : Champagne	AC : Antique Copper
OR : Pewter	PB : Polished Brass
MA : Matte Platinum	

Example: AT855R-CL-BK



The A3016 is a 3" flat frame housing for MR16 12V or MR16 metal halide lamps.

Optional Mounting
Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

A3016

3" Housing for MR16 12V 50W Max. & MR16 CMH 39W Max. Lamps

Mounting Frame

Constructed with single wall steel black-painted housing with a compact frame designed to fit in commercial / architectural construction. It has 1" (25mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral Electronic or Magnetic Transformer (E/M) with 120 or 347V input at 50/60 Hz operation and Class A sound-rated. 120V electronic transformer dimmable 100~0% in halogen lamp only.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

GU5.3 socket to accommodate 2-pin based MR16 12V lamps, or GX10 socket to accommodate MR16 CMH lamps.

Lamping Options

- MR16 12V Halogen
 - * 50 watt
- MR16 CMH
 - * 20 watt
 - * 39 watt
- LED MR16 12V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 257-259


Dimensions

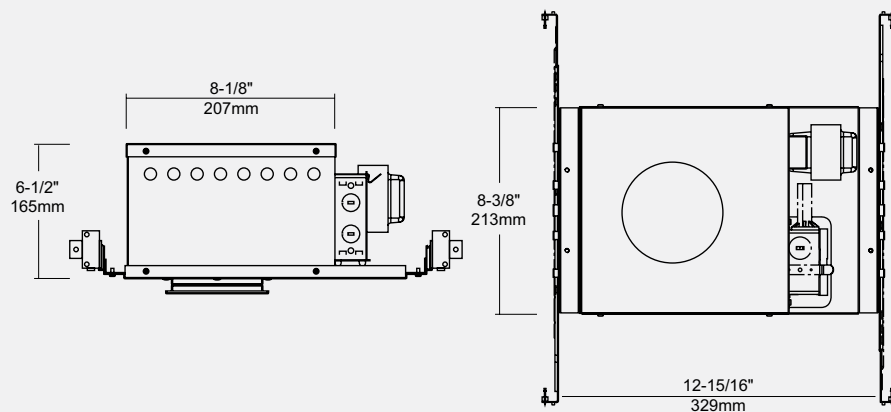

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- Metal Halide, MR16 (GX10), 39W max.
- LED, MR16 12V.

Icon Features

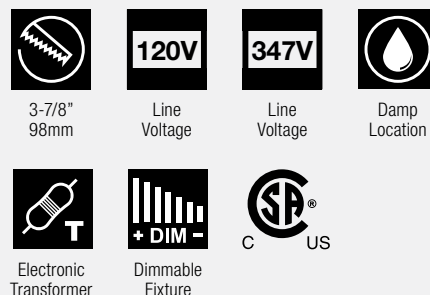

Ordering Guide

	Transformer	Lamp Wattage
A3016 -		
	E120 : 120V Electronic	20 : 20 watt
	M120 : 120V Magnetic	39 : 39 watt
	M347 : 347V Magnetic	50 : 50 watt

Example: A3016-E120-39

Consult factory for more information on compatible dimmers.




AT324R-ST

3" Straight Reflector Cone

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



P. 256

Ordering Guide

Reflector	Trim Ring
AT324R-ST -	-
CL : Clear Specular	WH : White
HC : Haze Clear	PB : Polished Brass
CG : Champagne Gold	SF : Self Flange
	CF : Custom Flange




AT324RG-ST

3" Shower Lens Trim

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



P. 256

Ordering Guide

Reflector	Trim Ring	Option
AT324RG-ST -	-	-
CL : Clear Specular	WH : White	LSL : Linear Spread Lens
HC : Haze Clear	PB : Polished Brass	HCL : Hex Cell Louver
CG : Champagne Gold	SF : Self Flange	FC : Frosted Lens
	CF : Custom Flange	



AT309P-AJ


3" Slotted Wall Wash

* 2" slotted oval aperture.

* Adjustable to 45° with wall wash slope reflector.

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



P. 256

Ordering Guide

Reflector	Trim Ring
AT309P-AJ -	-
CL : Clear Specular	WH : White
HC : Haze Clear	PB : Polished Brass
CG : Champagne Gold	SF : Self Flange
	CF : Custom Flange

Example: AT309P-AJ-SM-PB



AT334-AJ

3" Pin-hole

* 1-1/4" pin-hole aperture.


* Adjustable to 45° with wall wash slope reflector.

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.

Ordering Guide

	Reflector	Trim Ring
AT334-AJ		
	CL : Clear Specular	WH : White
	HC : Haze Clear	PB : Polished Brass
	CG : Champagne Gold	SF : Self Flange
		CF : Custom Flange



HOUSING

P. 256



AT337-ST

3" Pin-hole

* 1-1/4" pin-hole aperture.


* Deeply recessed concealed lamp (40° beam spread).

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.

Ordering Guide

	Reflector	Trim Ring
AT337-ST		
	CL : Clear Specular	WH : White
	HC : Haze Clear	PB : Polished Brass
	CG : Champagne Gold	SF : Self Flange
		CF : Custom Flange



HOUSING

P. 256



AT3341-ST

3" Pin-hole

* 1-1/4" pin-hole aperture.


* Deep cone reflector.

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.

Ordering Guide

	Reflector	Trim Ring
AT3341-ST		
	CL : Clear Specular	WH : White
	HC : Haze Clear	PB : Polished Brass
	CG : Champagne Gold	SF : Self Flange
		CF : Custom Flange



HOUSING

P. 256

Example: AT337-ST-CL-SF



AT3253-RG-AJ

3" Angle Cut Wall Wash Reflector


* Adjustable to 45°.

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.

Ordering Guide

	Reflector	Trim Ring
AT3253-RG-AJ		
	CL : Clear Specular	WH : White
	HC : Haze Clear	PB : Polished Brass
	CG : Champagne Gold	SF : Self Flange
		CF : Custom Flange



P. 256



AT325-RG-AJ

3" Angle Cut Wall Wash Reflector

* Adjustable to 45°.


* With wet location lens.

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.

Ordering Guide

	Reflector	Trim Ring
AT325-RG-AJ		
	CL : Clear Specular	WH : White
	HC : Haze Clear	PB : Polished Brass
	CG : Champagne Gold	SF : Self Flange
		CF : Custom Flange




P. 256

Example: AT325-RG-AJ-CL-WH



The AS3516 is a 3.6" flat frame housing for MR16 12V or MR16 metal halide lamps. It features a square trim opening.

Optional Mounting
Channel Bracket



NOT FOR USE IN INSULATED CEILINGS

AS3516

3.6" x 3.6" Square Aperture Housing for MR16 12V 50W Max. & MR16 CMH 39W Max. Lamps

Mounting Frame

Constructed with single wall steel black-painted housing with a compact frame designed to fit in commercial / architectural construction. It has 1" (25mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral Electronic or Magnetic Transformer (E/M) with 120 or 347V input at 50/60 Hz operation and Class A sound rated.

120V electronic transformer dimmable 100~0% in halogen lamp only.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

GU5.3 socket to accommodate 2-pin based MR16 12V lamps, or GX10 socket to accommodate MR16 CMH lamps.

Lamping Options

- MR16 12V Halogen
- * 50 watt
- MR16 CMH
- * 20 watt
- * 39 watt
- LED MR16 12V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See page 261


Dimensions

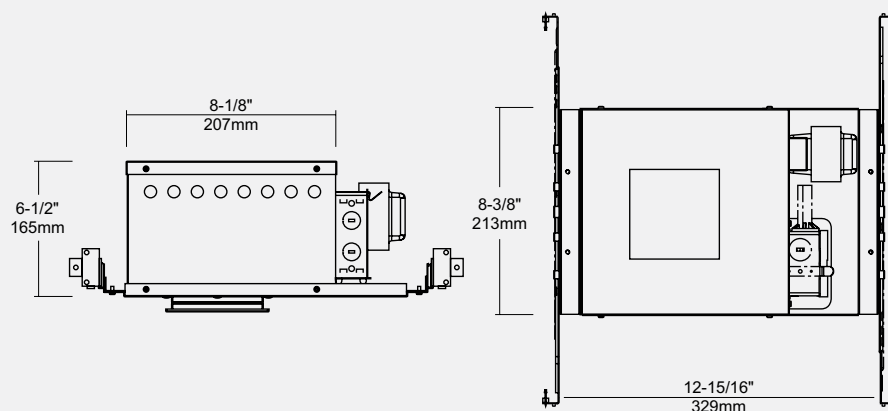

Compatible Lamps

- Halogen, MR16 (GU5.3), 50W max.
- Metal Halide, MR16 (GX10), 39W max.
- LED, MR16 12V.

Icon Features

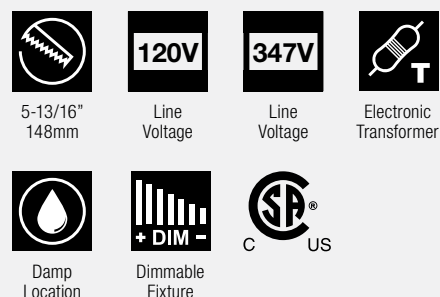

Ordering Guide

AS3516	Transformer	Lamp Wattage
	E120 : 120V Electronic	20 : 20 watt
	M120 : 120V Magnetic	39 : 39 watt
	M347 : 347V Magnetic	50 : 50 watt

Example: AS3516-E120-39

Consult factory for more information on compatible dimmers.




AT252-ST

3.6" Straight Fixed with Soft Focus Lens

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



HOUSING

P. 260

Ordering Guide

AT252-ST	Reflector	Trim Ring
	CL : Clear	WH : White
	WH : White	PB : Polished Brass
	BK : Black	SF : Self Flange
	GD : Gold	CF : Custom Flange
	HC : Haze Clear	
	CP : Champagne	




AT252-AT

3.6" Adjustable 0~30° Tilt

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



HOUSING

P. 260

Ordering Guide

AT252-AT	Reflector	Trim Ring
	CL : Clear	WH : White
	WH : White	PB : Polished Brass
	BK : Black	SF : Self Flange
	GD : Gold	CF : Custom Flange
	HC : Haze Clear	
	CP : Champagne	




AT256-SH

3.6" Fixed Lamp for Wet Location

Lamping Options

- MR16 12V Halogen, 50W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



HOUSING

P. 260


Ordering Guide

AT256-SH	Reflector	Trim Ring
	CL : Clear	WH : White
	WH : White	PB : Polished Brass
	BK : Black	SF : Self Flange
	GD : Gold	CF : Custom Flange
	HC : Haze Clear	
	CP : Champagne	

Example: AT256-SH-CL-WH



The A4016 is a 4" flat frame housing for MR16 12V or MR16 metal halide lamps.

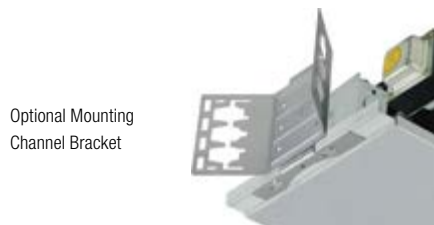

Optional Mounting
Channel Bracket

NOT FOR USE IN INSULATED CEILINGS

A4016

4" Aperture Housing for MR16 12V 75W Max. & MR16 CMH 39W Max. Lamps

Mounting Frame

Constructed with single wall steel black-painted housing with a compact frame designed to fit in commercial / architectural construction. It has 1" (25mm) deep collar that can be used for various thicknesses of ceiling material. Pre-installed hanger bar tracks are provided for short-side mounting.

Junction Box

Listed for through branch circuit wiring. Maximum eight no. 12 AWG 90°C branch-circuit conductors (four in and four out). Five 1/2" knockouts with true pry-out slots and four knockouts with Romex® cable clamp. Ground wire is provided on J-Box.

Hanger Bars

Rigid male/female design allows hanger bars to open to a maximum of 25" (635mm). Using the provided score lines, hanger bars can be shortened to accommodate slim profile joists. Built-in line-up foot allows for perfect housing height during installation. Pre-installed double-headed nail provides easy removal of housing. Integrated T-bar clips easily snap onto T-bars.

Optional Mounting Channel Bracket

Vertical adjustable architectural frame bracket accepts C-channel and EMT conduit.

Electrical

Integral Normal Power Factor (NPF) or High Power Factor (HPF) electronic and Magnetic Transformer (MT) with 120 or

347V input at 50/60 Hz operation and Class A sound-rated. 120V electronic transformer dimmable 100-0% in halogen lamp only.

System Protection

Integral thermal protector (RP1B thermo coupler), attached to the junction box, guards against insulation around the fixture and overheating of the fixture.

Socket

GU5.3 socket to accommodate 2-pin based MR16 12V lamps, or GX10 socket to accommodate MR16 CMH lamps.

Lamping Options

- MR16 12V Halogen
 - * 50 watt
 - * 75 watt
- MR16 CMH
 - * 20 watt
 - * 39 watt
- LED MR16 12V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Trim Options

See pages 263-264


Dimensions

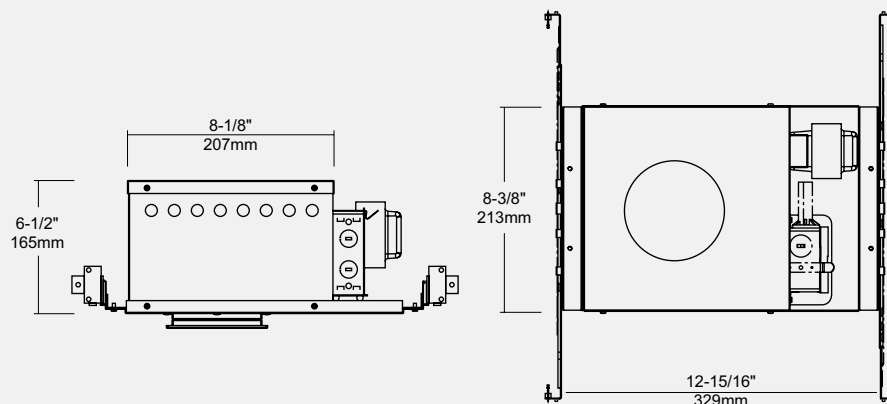

Compatible Lamps

- Halogen, MR16 (GU5.3), 75W max.
- Metal Halide, MR16 (GX10), 39W max.
- LED, MR16 12V.

Icon Features

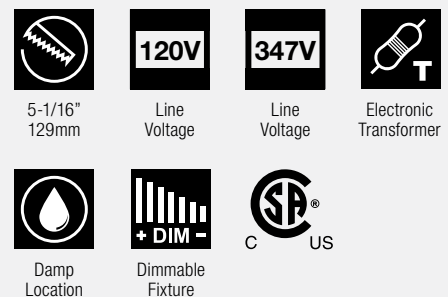

Ordering Guide

A4016	Transformer	Lamp Wattage
	H120 : 120V HPF	20 : 20 watt
	N120 : 120V NPF	39 : 39 watt
	M347 : 347V MT	50 : 50 watt
		75 : 75 watt

Example: A4016-H120-50

Consult factory for more information on compatible dimmers.




AT4252R-AJ

4" Reflector Wall Washer

Lamping Options

- MR16 12V Halogen, 75W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



P. 262

Ordering Guide

Reflector	Trim Ring	Beam Spread
AT4252R-AJ - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
CL : Clear	WH : White	NSP : 15°
WH : White	BK : Black	NFL : 25°
GD : Gold	CH : Chrome	FLD : 40°
HC : Haze Clear	SN : Satin Nickel	
	UN : Natural Steel	
	MO : Mocha	
	PB : Polished Brass	




AT434P-AJ

4" Reflector with Pinhole Aperture

Lamping Options

- MR16 12V Halogen, 75W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



P. 262

Ordering Guide

Reflector	Trim Ring	Beam Spread
AT434P-AJ - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
WH : White	WH : White	SP : 10°
BK : Black	BK : Black	NFL : 25°
	CH : Chrome	
	SN : Satin Nickel	
	UN : Natural Steel	
	MO : Mocha	
	PB : Polished Brass	




AT425R-AJ

4" Shower Trim with Soft Focus Lens

Lamping Options

- MR16 12V Halogen, 75W max.
- MR16 CMH, 39W max.
- LED MR16 12V.



P. 262

Ordering Guide

Reflector	Trim Ring	Beam Spread
AT425R-AJ - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
CL : Clear	WH : White	NSP : 15°
WH : White	BK : Black	NFL : 25°
GD : Gold	CH : Chrome	FLD : 40°
HC : Haze Clear	SN : Satin Nickel	
	UN : Natural Steel	
	MO : Mocha	
	PB : Polished Brass	

Example: AT425R-AJ-CL-WH-NFL



AT424R-ST


4" Reflector Cone

Lamping Options

- MR16 12V Halogen, 75W max.
- MR16 CMH, 39W max.
- LED MR16 12V.

Ordering Guide

Reflector	Trim Ring	Beam Spread
AT424R-ST - <input type="text"/>	- <input type="text"/>	- <input type="text"/>
CL : Clear	WH : White	FLD : 40°
WH : White	BK : Black	
GD : Gold	CH : Chrome	
HC : Haze Clear	SN : Satin Nickel	
	UN : Natural Steel	
	MO : Mocha	
	PB : Polished Brass	



P. 262

Example: AT424R-ST-CL-WH-FLD

ELIPSE MULTIPLES



Quick Find Index

Narrow Multiple Recessed Downlight



Narrow LED Multiple Recessed Downlight



Medium Multiple Recessed Downlight



Wide Multiple Recessed Downlight



Light Control Optional Accessories





The AM-NT is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 5 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable.

AM-NT

Narrow Multiple Recessed Downlight with Overlap Trim

Housing

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (13mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spot light into multiple directions.

Electrical

Integral electronic transformer with 120V or 347V input. 120V electronic transformer dimmable 100~0% in halogen lamps only. Replacement of transformers is accessible from below ceiling via access door on housing wall.

System Protection

Electronic: Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trim

Extruded trim frame comes with lamp holders installed, and is available in black, white, silver or any custom colour (contact factory for availability). The trim also includes torsion springs for convenient installation or removal from housing.

Lamping Options

Halogen

- MR16 12V, 75W max.
- AR70 12V, 75W max.
- PAR20 120V, 50W max.

Metal Halide

- MR16CMH 120V, 39W max.
- PAR20CMH 120V, 39W max.

LED

- MR16 12V
- PAR20 120V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

NOT FOR USE IN INSULATED CEILINGS

Dimensions

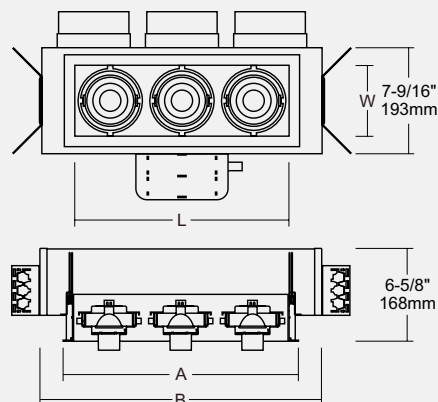

No. of Lamps	A	B	Fixture Opening WxL	Ceiling Cut-out WxL
1	6-9/16" 167mm	7-5/8" 194mm	5-1/16" x 5-1/16" 129mm x 129mm	6-5/16" x 6-5/16" 160mm x 160.7mm
2	11-11/16" 297mm	13-1/8" 333mm	5-1/16" x 10-3/16" 129mm x 259mm	6-5/16" x 11-7/16" 160mm x 291mm
3	16-13/16" 427mm	20-1/8" 511mm	5-1/16" x 15-5/16" 129mm x 389mm	6-5/16" x 16-9/16" 160mm x 421mm
4	21-15/16" 557mm	27-1/8" 689mm	5-1/16" x 20-7/16" 129mm x 519mm	6-5/16" x 21-11/16" 160mm x 551mm
5	27" 686mm	33-5/8" 854mm	5-1/16" x 25-9/16" 129mm x 649mm	6-5/16" x 26-13/16" 160mm x 681mm

Icon Features



Line Voltage



Electronic Transformer



Damp Location



Dimmable Fixture



UL LISTED

Ordering Guide

AM-NT	No. of Lamps	Lamp Type	Wattage	Voltage	Housing Colour	Trim Colour
	1 : 1 Lamp	MR : MR16 12V, 75W	20 : 20 watts	120 : 120V	BK : Black	BK : Black
	2 : 2 Lamps	MRMH : MR16 CMH 120V, 20W	39 : 39 watts		WH : White	WH : White
	3 : 3 Lamps	P20 : PAR20 120V, 50W	50 : 50 watts		SL : Silver	SL : Silver
	4 : 4 Lamps	P20MH : PAR20CMH 120V, 39W	75 : 75 watts		CUS : Custom	CUS : Custom
	5 : 5 Lamps	AR70 : AR70 12V, 50W				

Example: AM-NT3-P2050-120-BK-WH

Note: Metal Halide lamp wattage under 70 watts is not available in 347V.
Consult factory for more information on compatible dimmers.



The AM-NF is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 5 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable.

AM-NF

Narrow Trimless Multiple Recessed Downlight

Housing

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (25mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spot light into multiple directions.

Electrical

Integral electronic transformer with 120V or 347V input. 120V electronic transformer dimmable 100~0% in halogen lamps only. Replacement of transformers is accessible from below ceiling via access door on housing wall.

System Protection

Electronic: Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trimless

Trimless design. Perforated mesh frame provided, which adheres to the ceiling compound for seamless and trimless mounting.

Lamping Options

Halogen

- MR16 12V, 75W max.
- AR70 12V, 75W max.
- PAR20 120V, 50W max.

Metal Halide

- MR16CMH 120V/347V, 39W max.
- PAR20CMH 120V/347V, 39W max.

LED

- MR16 12V
- MR16 120V
- PAR20 120V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

NOT FOR USE IN INSULATED CEILINGS

Dimensions

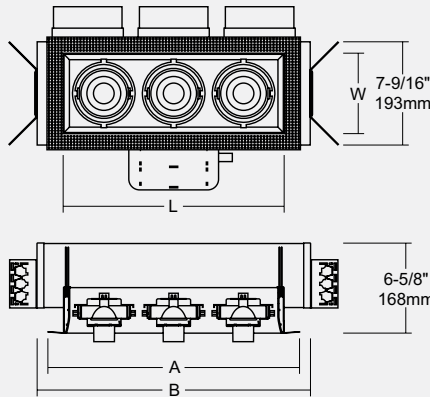

No. of Lamps

A

B

Fixture Opening WxL

Ceiling Cut-out WxL

1

8-3/8"
213mm

7-5/8"
194mm

5-9/16" x 5-11/16"
141mm x 144mm

6-5/16" x 6-5/16"
160mm x 160mm

2

13-1/2"
343mm

13-1/8"
333mm

5-9/16" x 10-13/16"
141mm x 275mm

6-5/16" x 11-7/16"
160mm x 291mm

3

18-5/8"
473mm

20-1/8"
511mm

5-9/16" x 15-7/8"
141mm x 403mm

6-5/16" x 16-9/16"
160mm x 421mm

4

23-3/4"
603mm

27-1/8"
689mm

5-9/16" x 21"
141mm x 533mm

6-5/16" x 21-11/16"
160mm x 551mm

5

28-13/16"
732mm

33-5/8"
854mm

5-9/16" x 26-1/8"
141mm x 664mm

6-5/16" x 26-13/16"
160mm x 681mm

Icon Features



Line
Voltage



Line
Voltage



Electronic
Transformer



Damp
Location



Dimmable
Fixture



UL
LISTED

Ordering Guide

AM-NF	No. of Lamps	Lamp Type	Wattage	Voltage	Housing Colour
	1 : 1 Lamp	MR : MR16 12V, 75W	20 : 20 watts	120 : 120V	BK : Black
	2 : 2 Lamps	MRMH : MR16 CMH 120V/347V, 20W	39 : 39 watts	347 : 347V	WH : White
	3 : 3 Lamps	P20 : PAR20 120V, 50W	50 : 50 watts		SL : Silver
	4 : 4 Lamps	P20MH : PAR20CMH 120V/347V, 39W	75 : 75 watts		CUS : Custom
	5 : 5 Lamps	AR70 : AR70 12V, 50W			

Example: AM-NF4-AR7075-347-BK

Note: Metal Halide lamp wattage under 70 watts is not available in 347V.
Consult factory for more information on compatible dimmers.



The AML-NT is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 5 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable. Beam spread available in narrow, medium and wide configuration.



NOT FOR USE IN INSULATED CEILINGS

AML-NT

Narrow LED Multiple Recessed Downlight with Overlap Trim

Housing

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (25mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spotlight into multiple directions.

Electrical

Integral electronic driver with 120V or 347V input. Replacement of transformers is accessible through ceiling opening via access door on housing wall. Dimmable 100~0%.

System Protection

Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trim

Trim frame comes with lamp holders installed, and is available in black, white, silver or any custom colour (contact factory for availability). It also includes torsion springs for convenient installation or removal from housing.


LED Module

Powered by Philips Lumileds LUXEON® S LED chip, this module maintains uniform intensity with a typical luminous flux of 1300 per LED chip (minimum CRI of 80) and a typical viewing angle of 115°. With 70% lumen maintenance at 50,000 hours this module exceeds ENERGY STAR® lumen maintenance requirements. 3000K nominal colour temperature. The LED chip is provided with a mechanical clamp and snap-in reflector. Passive aluminum heat sink is attached to each module to lower operating temperature.

Optional Accessories

ALB-27 : 27" A-Line linear hanger bar
Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

Dimensions

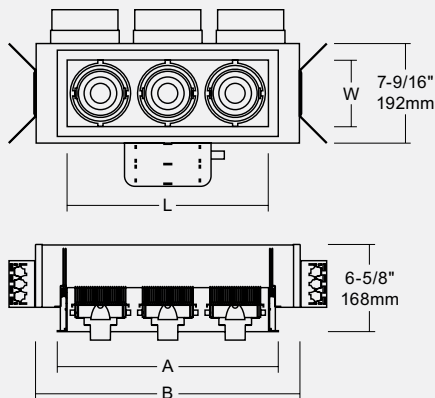

No. of Lamps	A	B	Fixture Opening W x L	Ceiling Cut-Out W x L
1	6-9/16" 167mm	7-5/8" 194mm	5-1/16" x 5-1/16" 129mm x 129mm	6-5/16" x 6-5/16" 160mm x 160mm
2	11-11/16" 297mm	13-1/8" 333mm	5-1/16" x 10-3/16" 129mm x 259mm	6-5/16" x 11-7/16" 160mm x 291mm
3	16-13/16" 427mm	20-1/8" 511mm	5-1/16" x 15-5/16" 129mm x 389mm	6-5/16" x 16-9/16" 160mm x 421mm
4	21-15/16" 557mm	27-1/8" 689mm	5-1/16" x 20-7/16" 129mm x 519mm	6-5/16" x 21-11/16" 160mm x 551mm
5	27" 686mm	33-5/8" 854mm	5-1/16" x 25-9/16" 129mm x 649mm	6-5/16" x 26-13/16" 160mm x 681mm

Icon Features



Line Voltage



Line Voltage



Electronic Driver



Damp Location



Dimmable Fixture



UL LISTED

Ordering Guide

AML-NT	No. of Lamps	Lamp / Wattage	Colour Temp.	Voltage	Beam Spread	Housing Colour	Trim Colour
	1 : 1 Lamp 2 : 2 Lamps 3 : 3 Lamps 4 : 4 Lamps 5 : 5 Lamps	18 : 18W LED	30 : 3000K	120 : 120V	N : Narrow M : Medium W : Wide	BK : Black WH : White SL : Silver CUS : Custom	BK : Black WH : White SL : Silver CUS : Custom

Example: AML-NT2-1830-120-N-BK-WH

Consult factory for more information on compatible dimmers.



The AM-MT is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 4 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable.

AM-MT

Medium Multiple Recessed Downlight with Overlap Trim

Housing

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (13mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spotlight into multiple directions.

Electrical

Integral electronic transformer with 120V or 347V input. 120V electronic transformer dimmable 100~0% in halogen lamps only. Replacement of transformers is accessible from below ceiling via access door on housing wall.

System Protection

Electronic: Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trim

Extruded trim frame comes with lamp holders installed, and is available in black, white, silver or any custom colour (contact factory for availability). The trim also includes torsion springs for convenient installation or removal from housing.

Lamping Options

Halogen

- AR111 12V, 75W max.

- PAR30 120V, 75W max.

Metal Halide

- PAR30MH 120V/347V, 70W max.

- T4 CMH 120V/347V, 70W max.

- T6 CMH 120V/347V, 70W max.

- R111MH 120V/347V, 70W max.

LED

- PAR30 120V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

NOT FOR USE IN INSULATED CEILINGS

Dimensions

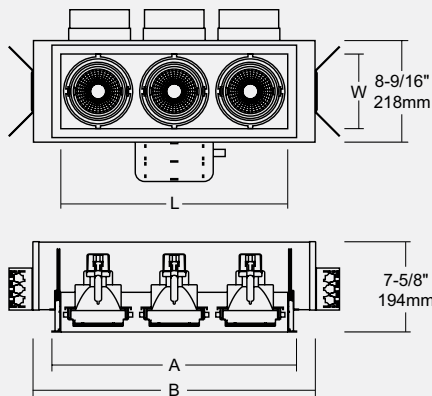

No. of Lamps

A

B

Fixture Opening WxL

Ceiling Cut-out WxL

1

7-13/16"
198mm

8-5/8"
219mm

6-1/16" x 6-1/16"
154mm x 154mm

7-5/16" x 7-9/16"
186mm x 192mm

2

14-3/16"
360mm

16-1/8"
410mm

6-1/16" x 12-11/16"
154mm x 322mm

7-5/16" x 14"
186mm x 356mm

3

20-5/8"
524mm

23-13/16"
605mm

6-1/16" x 19-1/8"
154mm x 486mm

7-5/16" x 20-3/8"
186mm x 518mm

4

27-1/16"
687mm

30-5/8"
778mm

6-1/16" x 25-9/16"
154mm x 649mm

7-5/16" x 26-13/16"
186mm x 681mm

Icon Features



Line
Voltage



Line
Voltage



Electronic
Transformer



Damp
Location



Dimmable
Fixture



UL
LISTED

Ordering Guide

AM-MT

No. of Lamps

1 : 1 Lamp
2 : 2 Lamps
3 : 3 Lamps
4 : 4 Lamps

Bulb Type

AR : AR70 12V, 75W max.
P30 : PAR30 120V, 75W max.
P30MH : PAR30CMH 120V/347V, 70W max.
R111 : R111MH 120V/347V, 70W max.
T4 : T4MH 120V/347V, 70W max.
T6 : T6MH 120V/347V, 70W max.

Wattage

22 : 22 watts
38 : 38 watts
39 : 39 watts
70 : 70 watts
75 : 75 watts

Beam Spread

N : Narrow
M : Medium
W : Wide

Voltage

120 : 120V
347 : 347V

Housing Colour

BK : Black
WH : White
SL : Silver
CUS : Custom

Trim Colour

BK : Black
WH : White
SL : Silver
CUS : Custom

Example: AM-MT2-R11170-W-347-BK-SL

Note: Metal Halide lamp wattage under 70 watts is not available in 347V.
Consult factory for more information on compatible dimmers.



The AM-MF is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 4 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable

AM-MF

Medium Trimless Multiple Recessed Downlight

Mounting Frame

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (13mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spotlight into multiple directions.

Electrical

Integral electronic transformer with 120V or 347V input. 120V electronic transformer dimmable 100~0% in halogen lamps only. Replacement of transformers is accessible from below ceiling via access door on housing wall.

System Protection

Electronic: Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trimless

Trimless design. Perforated mesh frame provided, which adheres to the ceiling compound for seamless and trimless mounting.

Lamping Options

Halogen

- AR111 12V, 75W max.

- PAR30 120V, 75W max.

Metal Halide

- PAR30MH 120V/347V, 70W max.

- T4 CMH 120V/347V, 70W max.

- T6 CMH 120V/347V, 70W max.

- R111MH 120V/347V, 70W max.

LED

- PAR30 120V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

NOT FOR USE IN INSULATED CEILINGS

Dimensions

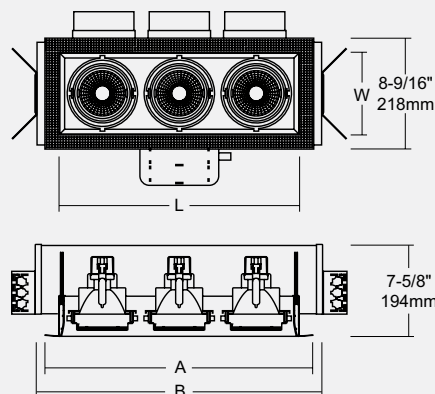

No. of Lamps	A	B	Fixture Opening WxL	Ceiling Cut-Out WxL
1	9-5/8" 244mm	8-5/8" 219mm	6-3/4" x 6-15/16" 171mm x 176mm	7-5/16" x 7-9/16" 186mm x 192mm
2	16-1/8" 410mm	16-1/8" 410mm	6-3/4" x 13-5/16" 171mm x 338mm	7-5/16" x 14" 186mm x 356mm
3	22-1/2" 572mm	23-13/16" 605mm	6-3/4" x 19-11/16" 171mm x 500mm	7-5/16" x 20-3/8" 186mm x 518mm
4	28-7/8" 733mm	30-5/8" 778mm	6-3/4" x 26-1/8" 171mm x 664mm	7-5/16" x 26-13/16" 186mm x 681mm

Icon Features



Line Voltage



Line Voltage



Electronic Transformer



Damp Location



Dimmable Fixture



UL LISTED

Ordering Guide

AM-MF	No. of Lamps	Bulb Type	Wattage	Beam Spread	Voltage	Housing Colour
	1 : 1 Lamp 2 : 2 Lamps 3 : 3 Lamps 4 : 4 Lamps	AR : AR70 12V, 75W max. P30 : PAR30 120V, 75W max. P30MH : PAR30CMH 120V/347V, 70W max. R111 : R111MH 120V/347V, 70W max. T4 : T4MH 120V/347V, 70W max. T6 : T6MH 120V/347V, 70W max.	22 : 22 watts 38 : 38 watts 39 : 39 watts 70 : 70 watts 75 : 75 watts	N : Narrow M : Medium W : Wide	120 : 120V 347 : 347V	BK : Black WH : White SL : Silver CUS : Custom

Example: AM-MF3-T470-M-120-WH

Note: Metal Halide lamp wattage under 70 watts is not available in 347V.
Consult factory for more information on compatible dimmers.



The AM-WT is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 4 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable.

AM-WT

Wide Multiple Recessed Downlight with Overlap Trim

Housing

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (13mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spotlight into multiple directions.

Electrical

Integral electronic transformer with 120V or 347V input. Replacement of transformers is accessible from below ceiling via access door on housing wall.

System Protection

Electronic: Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trim

Extruded trim frame comes with lamp holders installed, and is available in black, white, silver or any custom colour (contact factory for availability). The trim also includes torsion springs for convenient installation or removal from housing.

Lamping Options

Halogen

- PAR38 120V, 150W max.

Metal Halide

- PAR38MH 120V/347V, 100W max.

- T6 CMH 120V/347V, 70W max.

LED

- PAR38 120V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

NOT FOR USE IN INSULATED CEILINGS

Dimensions

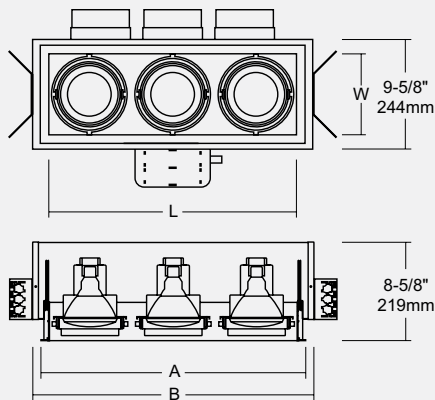

No. of Lamps

A

B

Fixture Opening WxL

Ceiling Cut-Out WxL

1

8-9/16"
217mm

9-5/8"
244mm

7-1/8" x 7-1/16"
181mm x 179mm

8-1/16" x 8-3/8"
205mm x 213mm

2

15-5/8"
397mm

17-1/8"
435mm

7-1/8" x 14-3/8"
181mm x 365mm

8-1/16" x 15-5/8"
205mm x 397mm

3

23-1/8"
587mm

24-9/16"
624mm

7-1/8" x 21-5/8"
181mm x 549mm

8-1/16" x 22-15/16"
205mm x 583mm

4

30-7/16"
773mm

33-5/8"
854mm

7-1/8" x 28-15/16"
181mm x 735mm

8-1/16" x 30-3/16"
205mm x 767mm

Icon Features



Line
Voltage



Line
Voltage



Electronic
Transformer



Damp
Location



Dimmable
Fixture



UL
LISTED

Ordering Guide

AM-WT	No. of Lamps	Bulb Type	Wattage	Beam Spread	Voltage	Housing Colour	Trim Colour
	1 : 1 Lamp 2 : 2 Lamps 3 : 3 Lamps 4 : 4 Lamps	P38 : PAR38 120V, 150W max. P38MH : PAR38CMH 120V/347V, 100W max. T6 : T6MH 120V/347V, 70W max.	70 : 70W 100 : 100W 150 : 150W	N : Narrow M : Medium W : Wide	120 : 120V 347 : 347V	BK : Black WH : White SL : Silver CUS : Custom	BK : Black WH : White SL : Silver CUS : Custom

Example: AM-WT2-P38MH100-W-347-BK-BK

Note: Metal Halide lamp wattage under 70 watts is not available in 347V.
Consult factory for more information on compatible dimmers.



The AM-WF is a modern and aesthetically pleasing alternative to track or standard recessed installations. Available in 1 to 4 light configurations, this multi-luminaire fixture blends into the ceiling while each lamp configuration is individually adjustable.

AM-WF

Wide Trimless Multiple Recessed Downlight

Housing

Constructed of 22ga painted steel. The housing is supplied with a plate to allow the junction box installation to be accessible from below the ceiling.

Junction Box

3" x 4-7/8" x 3-1/2" #17ga galvanized steel. UL listed for maximum of eight no. 12 AWG 90°C through-branch circuit conductors.

Mounting

Can accommodate a 1/2" (13mm) to 1-3/4" (44mm) ceiling thickness. The fixture is supplied with channel brackets that allow up to 5" vertical adjustment. The channel brackets can accommodate 1/2" EMT conduit or ALB-27 hanger bars.

Lamp Holders

Adjustable up to 45° tilt and 358° rotation to allow for spotlight into multiple directions.

Electrical

Integral electronic transformer with 120V or 347V input. Replacement of transformers is accessible from below ceiling via access door on housing wall.

System Protection

Electronic: Thermally protected via an RP1B attached to the junction box to guard against misuse of insulation around the fixture and overheating of the fixture.

Trimless

Trimless design. Perforated mesh frame provided, which adheres to the ceiling compound for seamless and trimless mounting.

Lamping Options

Halogen

- PAR38 120V, 150W max.

Metal Halide

- PAR38MH 120V/347V, 100W max.
- T6 CMH 120V/347V, 70W max.

LED

- PAR38 120V


Optional Accessories

ALB-27 : 27" A-Line linear hanger bar

Light control accessories - snoot, cross louver, hex cell and lenses (see page 274)

NOT FOR USE IN INSULATED CEILINGS

Dimensions

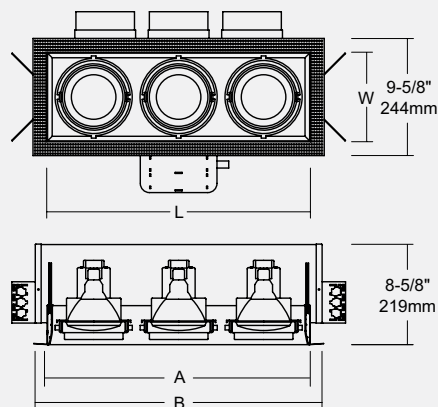

No. of Lamps	A	B	Fixture Opening WxL	Ceiling Cut-Out WxL
1	10-7/16" 265mm	9-5/8" 244mm	7-1/2" x 7-11/16" 191mm x 195mm	8-1/16" x 8-3/8" 205mm x 213mm
2	17-11/16" 449mm	17-1/8" 435mm	7-1/2" x 15" 191mm x 381mm	8-1/16" x 15-5/8" 205mm x 397mm
3	25" 635mm	24-9/16" 624mm	7-1/2" x 22-1/4" 191mm x 565mm	8-1/16" x 22-15/16" 205mm x 583mm
4	32-5/16" 821mm	33-5/8" 854mm	7-1/2" x 29-1/2" 191mm x 749mm	8-1/16" x 30-3/16" 205mm x 767mm

Icon Features



Line Voltage



Line Voltage



Electronic Transformer



Damp Location



Dimmable Fixture



UL LISTED

Ordering Guide

AM-WF	No. of Lamps	Bulb Type	Wattage	Beam Spread	Voltage	Housing Colour
	1 : 1 Lamp 2 : 2 Lamps 3 : 3 Lamps 4 : 4 Lamps	P38 : PAR38 120V, 150W max. P38MH : PAR38CMH 120V/347V, 100W max. T6 : T6MH 120V/347V, 70W max.	70 : 70W 100 : 100W 150 : 150W	N : Narrow M : Medium W : Wide	120 : 120V 347 : 347V	BK : Black WH : White SL : Silver CUS : Custom

Example: AM-WF4-P38150-M-120-WH

Note: Metal Halide lamp wattage under 70 watts is not available in 347V.
Consult factory for more information on compatible dimmers.


Multiple Features

Lamping Configuration




Ballast/Drivers/Transformers

Low-voltage and line-voltage halogen models are fully dimmable. All lamps are powered with individual drivers/transformers/ballasts for continuous independent operation. Drivers/transformers/ballasts can be serviced individually from below the ceiling, without the use of tools.

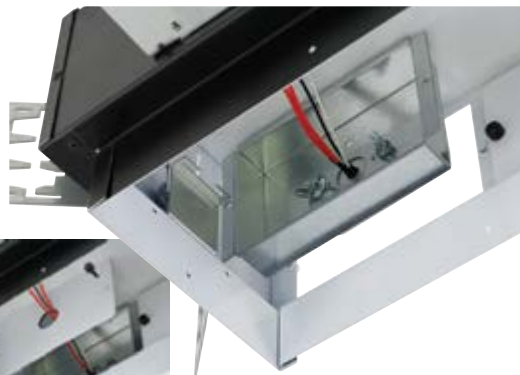

Light Control Accessories

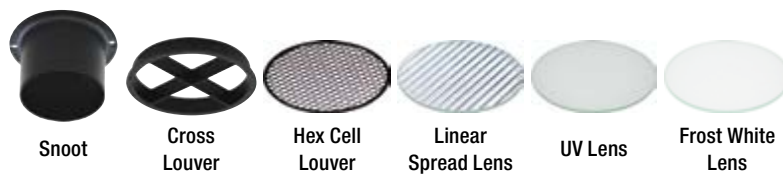

	AM-NSNT	AM-NXLVR	AM-NHXLVR	AM-NLNLNS	AM-NUVLNS	AM-NFRWLNS
Narrow	AM-MSNT	AM-MXLVR	AM-MHXLVR	—	AM-MUVLNS	AM-MFRWLNS
Medium	—	AM-WXLVR	AM-WHXLVR	AM-WLNLNS	—	AM-WFRWLNS
Wide						

Custom Finishing




STANDARD
Black Interior / White Trim



CUSTOM
White Interior / White Trim



CUSTOM
Silver Interior / Black Trim



CUSTOM
White Interior / Blue Trim

Trim Styles



Trimless (metal plaster frame)



Trim

Lamp Holder Assembly



Bi-directional gimbals allow 360° horizontal aiming of light and from 0° to 45° vertical. AR111 lamp shown below.

Rear housing

Replaceable lamp
(see lamp options)

Lens retaining spring
with bushings

Interchangeable lens
(see accessories)

Front housing twists
and locks into place



CEROS CYLINDERS



Quick Find Index

6" Incandescent Vertical Cylinders



8" Incandescent Vertical Cylinders



6" Compact Fluorescent Vertical Cylinders



8" Compact Fluorescent Vertical Cylinders



6" Metal Halide Vertical Cylinders



8" Metal Halide Vertical Cylinders





Seamless round cylinder for incandescent lamp. May choose reflector types and finishes to customize lighting effects. Wall and pendant mount options offer additional installation flexibility.

ACYC6550, ACYW6550, ACYP6550

6" Incandescent Vertical Cylinders. Surface, Wall or Pendant Mount

Housing

Round seamless 16ga thick spun aluminum housing available in white, black or bronze finish with choice of reflectors.

Reflector

Anodized clear, haze, gold, champagne, pewter colour finished full reflectors. Also available anodized reflectors with black or white baffle.

Wall Bracket (ACYW6550)

Aluminum-casted bracket secured to housing cross-bar by set screws.

Pendant

May choose from aircraft cable, flat surface down-rods to slope ceiling down-rods. Consult factory on customized lengths.

Socket Cup/Socket

Medium base ceramic socket. Vertically adjustable for multiple lamp-holder positions. For use with A19, A21, R30, and PAR30 lamps. Dimmable.

Lamping Options


Incandescent

- A19, A21, R30, PAR30
- * 60 watt
- * 75 watt
- * 100 watt
- * 150 watt
- LED
- PAR30


Optional Accessories

ACPRK-48 : 48" suspension kit for slope ceiling.

Dimensions

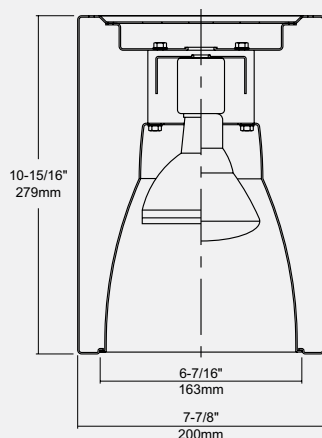

Ceiling Mount (ACYC6550)

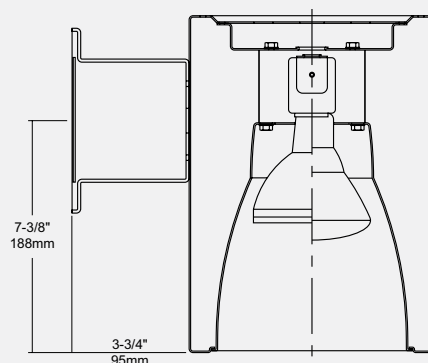

Wall Mount (ACYW6550)

Compatible Lamps

- Incandescent, A19, 100W max.
- Incandescent, A21, 150W max.
- Incandescent, R30, 75W max.
- Incandescent, PAR30, 75W max.
- LED, PAR30

Icon Features



Line Voltage



Damp Location



Dimmable Fixture



Ordering Guide

Housing	Finish	Reflector Finish	Options	Accessories
ACYC6550 : Ceiling Mount ACYW6550 : Wall Mount ACYP6550 : Pendant	WH : White BK : Black BZ : Bronze	CL : Clear GD : Gold CP : Champagne HC : Haze Clear MA : Matte Platinum	WB : White Baffle Collar BB : Black Baffle Collar	ACPRK-48 : 48" Suspension Kit

Example: ACYC6550-WH-CL

Consult factory for more information on compatible dimmers.



Seamless round cylinder for incandescent lamp. May choose reflector types and finishes to customize lighting effects. Wall and pendant mount options offer additional installation flexibility.

ACYC8550, ACYW8550, ACYP8550

8" Incandescent Vertical Cylinders. Surface, Wall or Pendant Mount

Housing

Round seamless 16ga thick spun aluminum housing available in white, black or bronze finish with choice of reflectors.

Reflector

Anodized clear, haze, gold, champagne, pewter colour finished full reflectors. Also available anodized reflectors with black or white baffle.

Lamping Options

- Incandescent
 - R40, BR40, PAR38, 150 watt max.
- LED
 - PAR38

Optional Accessories

ACPRK-48 : 48" suspension kit for slope ceiling.

Wall Bracket (ACYW8550)

Aluminum-casted bracket secured to housing cross-bar by set screws.


Pendant

May choose from aircraft cable, flat surface down-rods to slope ceiling down-rods. Consult factory on customized lengths.


Socket Cup/Socket

Medium base ceramic socket. Vertically adjustable for multiple lamp-holder positions. For use with R40, BR40, and PAR38 lamps. Dimmable.

Dimensions

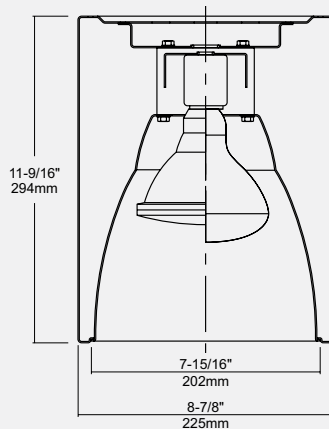

Ceiling Mount (ACYC8550)

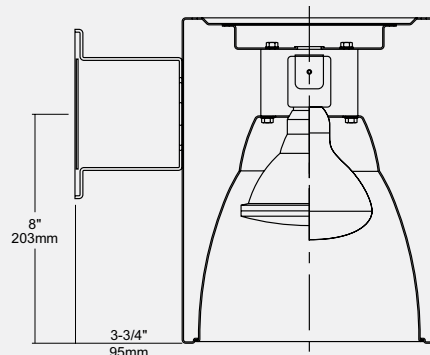


Wall Mount (ACYW8550)

Compatible Lamps

- Incandescent, R40, 150W max.
- Incandescent, BR40, 150W max.
- Incandescent, PAR38, 150W max.
- LED PAR38

Icon Features



Ordering Guide

Housing	Finish	Reflector Finish	Options	Accessories
ACYC8550 : Ceiling Mount ACYW8550 : Wall Mount ACYP8550 : Pendant	WH : White BK : Black BZ : Bronze	CL : Clear GD : Gold CP : Champagne HC : Haze Clear MA : Matte Platinum	WB : White Baffle Collar BB : Black Baffle Collar	ACPRK-48 : 48" Suspension Kit

Example: ACYC8550-WH-HC

Consult factory for more information on compatible dimmers.



Seamless round cylinder for compact fluorescent lamp. May choose reflector types and finishes to customize lighting effects. Wall and pendant mount options offer additional installation flexibility.

ACYC6300, ACYW6300, ACYP6300

6" Compact Fluorescent Vertical Cylinders. Surface, Wall or Pendant Mount

Housing

Round seamless 16ga thick spun aluminum housing available in white, black or bronze finish with choice of reflectors.

Reflector

Anodized clear, haze, gold, champagne, pewter colour finished full reflectors. Also available anodized reflectors with black or white baffle.

Wall Bracket (ACYW6300)

Aluminum-casted bracket secured to housing cross-bar by set screws.

Pendant

May choose from aircraft cable, flat surface down-rods to slope ceiling down-rods. Consult factory on customized lengths.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347 volt input at 50/60 Hz operation and Class A sound-rated. 120 volt electronic ballast dimmable 100~0%.

Socket Cup/Socket

It accommodates a G24q/GX24q socket and provides a vertically adjustable socket mounting plate for various lamp sizes.

Lamping Options


Compact Fluorescent

- DTT – Double Twin Tube (Quad/CFQ)
- * 26 watt (G24q-3)
- TTT – Triple Twin Tube (CFTR)
- * 26 watt (GX24q-3)
- * 32 watt (GX24q-3)
- * 42 watt (GX24q-4)


Optional Accessories

ACPRK-48 : 48" suspension kit for slope ceilings.

Dimensions

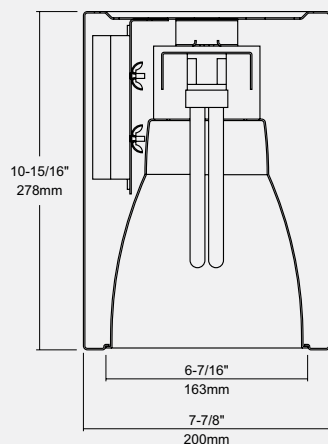

Ceiling Mount (ACYC6300)

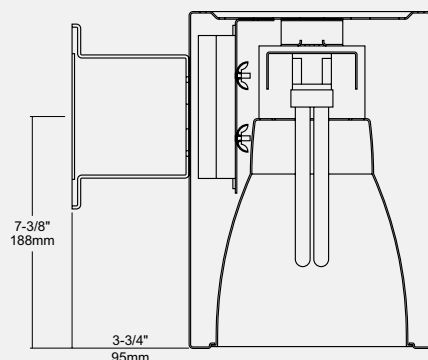


Wall Mount (ACYW6300)

Compatible Lamps

- Double Twin Tube (Quad/CFQ), 26W max.
- Triple Twin Tube (CFTR), 42W max.

Icon Features

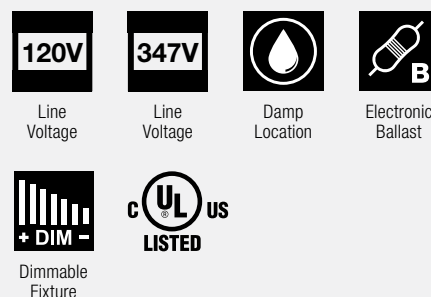

Ordering Guide

Housing	Ballast Voltage	Lamp Wattage	Finish	Reflector Finish	Options	Accessories
ACYC6300 : Ceiling Mount ACYW6300 : Wall Mount ACYP6300 : Pendant	H120 : 120V HPF H347 : 347V HPF	26 : 1 × 26 watt 32 : 1 × 32 watt 42 : 1 × 42 watt	WH : White BK : Black BZ : Bronze	CL : Clear GD : Gold CP : Champagne HC : Haze Clear MA : Matte Platinum	WB : White Baffle Collar BB : Black Baffle Collar	ACPRK-48 : 48" Suspension Kit

Example: ACYC6300-H120-26-BZ-CL

Consult factory for more information on compatible dimmers.



Seamless round cylinder for compact fluorescent lamp. May choose reflector types and finishes to customize lighting effects. Wall and pendant mount options offer additional installation flexibility.

ACYC8300, ACYW8300, ACYP8300

8" Compact Fluorescent Vertical Cylinders. Surface, Wall or Pendant Mount

Housing

Round seamless 16ga thick spun aluminum housing available in white, black or bronze finish with choice of reflectors.

Reflector

Anodized clear, haze, gold, champagne, pewter colour finished full reflectors. Also available anodized reflectors with black or white baffle.

Wall Bracket (ACYW8300)

Aluminum-casted bracket secured to housing cross-bar by set screws.

Pendant

May choose from aircraft cable, flat surface down-rods to slope ceiling down-rods. Consult factory on customized lengths.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347 volt input at 50/60 Hz operation and Class A sound-rated. 120 volt electronic ballast dimmable 100~0%.

Socket Cup/Socket

It accommodates a G24q/GX24q socket and provides a vertically adjustable socket mounting plate for various lamp sizes.

Lamping Options

Compact Fluorescent

• DTT – Double Twin Tube (Quad/CFQ)

* 26 watt (G24q-3)

• TTT – Triple Twin Tube (CFTR)

* 26 watt (GX24q-3)

* 32 watt (GX24q-3)

* 42 watt (GX24q-4)


* 57 watt (GX24q-5)

* 70 watt (GX24q-6)


Optional Accessories

ACPRK-48 : 48" suspension kit for slope ceilings.

Dimensions

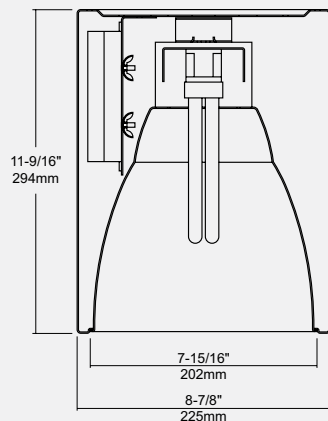

Ceiling Mount (ACYC8300)

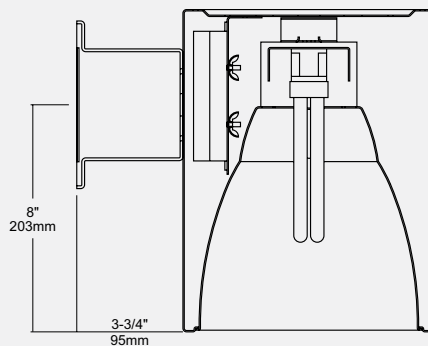

Wall Mount (ACYW8300)

Compatible Lamps

Double Twin Tube (Quad/CFQ), 26W max.

Triple Twin Tube (CFTR), 70W max.

Icon Features



Line Voltage



Line Voltage



Damp Location



Electronic Ballast



Dimmable Fixture



UL LISTED

Ordering Guide

Housing	Ballast Voltage	Lamp Wattage	Finish	Reflector Finish	Options	Accessories
ACYC8300 : Ceiling Mount ACYW8300 : Wall Mount ACYP8300 : Pendant	H120 : 120V HPF H347 : 347V HPF	26 : 1 x 26 watt 32 : 1 x 32 watt 42 : 1 x 42 watt 57 : 1 x 57 watt 70 : 1 x 70 watt	WH : White BK : Black BZ : Bronze	CL : Clear GD : Gold CP : Champagne HC : Haze Clear MA : Matte Platinum	WB : White Baffle Collar BB : Black Baffle Collar	ACPRK-48 : 48" Suspension Kit

Example: ACYC8300-H120-32-WH-CL

Consult factory for more information on compatible dimmers.



ACYC6500, ACYW6500, ACYP6500

6" Metal Halide Vertical Cylinders. Surface, Wall or Pendant Mount

Upper Housing

Space for installation of electronic ballast wiring to lamp-holder in the lamp housing. Easy access for replacement of ballast.

Lower Housing

Round seamless 16ga thick spun aluminum housing available in white, black or bronze finish with choice of reflectors.

Reflector

Anodized clear, haze, gold, champagne, pewter colour finished full reflectors. Also available anodized reflectors with black or white baffle.

Wall Bracket (ACYW6500)

Aluminum-casted bracket secured to housing cross-bar by set screws.

Pendant

May choose from aircraft cable, flat surface down-rods to slope ceiling down-rods. Consult factory on customized lengths.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation and Class A sound-rated.

Socket Cup/Socket

Medium-base ceramic socket acts as a heat sink. Provides a vertically adjustable multiple lamp-holder position for various lamp sizes and beam direction. It accommodates medium-based PAR38 metal halide lamp.

Lamping Options

Metal Halide
 • PAR30, E17, ED17
 * 39 watt
 * 70 watt


Optional Accessories

ACPRK-48 : 48" suspension kit for slope ceilings.




Seamless round cylinder for metal halide lamps. HID electronic ballast installed in separate housing on the top to prevent damage from heat. May choose reflector types and finishes to customize lighting effects. Wall and pendant mount options offer additional installation flexibility.

Dimensions

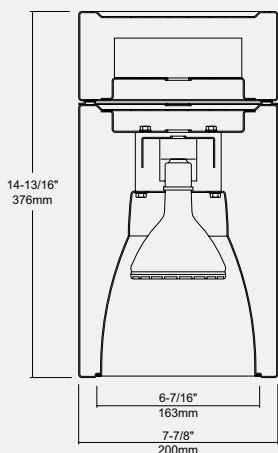

Ceiling Mount (ACYC6500)

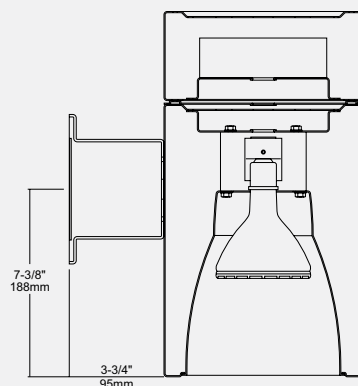

Wall Mount (ACYW6500)

Compatible Lamps

- Metal Halide, PAR30, 70W max.
- Metal Halide, ED17, 70W max.

Icon Features

- Line Voltage
- Line Voltage
- Damp Location
- Electronic Ballast



Ordering Guide

Housing	Ballast Voltage	Lamp Wattage	Finish	Reflector Finish	Options	Accessories
ACYC6500 : Ceiling Mount ACYW6500 : Wall Mount ACYP6500 : Pendant	H120 : 120V HPF H347 : 347V HPF	39 : 1 × 39 watt 70 : 1 × 70 watt	WH : White BK : Black BZ : Bronze	CL : Clear GD : Gold CP : Champagne HC : Haze Clear MA : Matte Platinum	WB : White Baffle Collar BB : Black Baffle Collar	ACPRK-48 : 48" Suspension Kit

Example: ACYC6500-H120-39-BK-CL



Seamless round cylinder for metal halide lamps. HID electronic ballast installed in separate housing on the top to prevent damage from heat. May choose reflector types and finishes to customize lighting effects. Wall and pendant mount options offer additional installation flexibility.

ACYC8500, ACYW8500, ACYP8500

8" Metal Halide Vertical Cylinders. Surface, Wall or Pendant Mount

Upper Housing

Space for installation of electronic ballast wiring to lamp-holder in the lamp housing. Easy access for replacement of ballast.

Lower Housing

Round seamless 16ga thick spun aluminum housing available in white, black or bronze finish with choice of reflectors.

Reflector

Anodized clear, haze, gold, champagne, pewter colour finished full reflectors. Also available anodized reflectors with black or white baffle.

Wall Bracket (ACYW8500)

Aluminum-casted bracket secured to housing cross-bar by set screws.

Pendant

May choose from aircraft cable, flat surface down-rods to slope ceiling down-rods. Consult factory on customized lengths.

Electrical

Integral High Power Factor (HPF) electronic ballast with 120 or 347V input at 50/60 Hz operation and Class A sound rated.

Socket Cup/Socket

Medium-base ceramic socket acts as a heat sink. Provides a vertically adjustable multiple lamp-holder position for various lamp sizes and beam direction. It accommodates medium-based PAR38 metal halide lamp.

Lamping Options

Metal Halide

• PAR38, E17, ED17, BD17

* 39 watt

* 50 watt


* 70 watt

* 100 watt


Optional Accessories

ACPRK-48 : 48" suspension kit for slope ceilings.

Dimensions

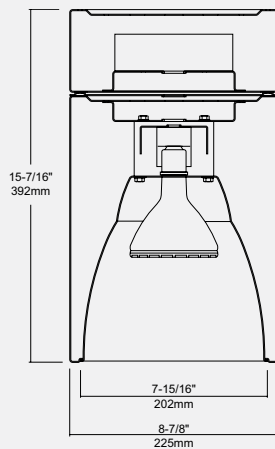

Ceiling Mount (ACYC8500)

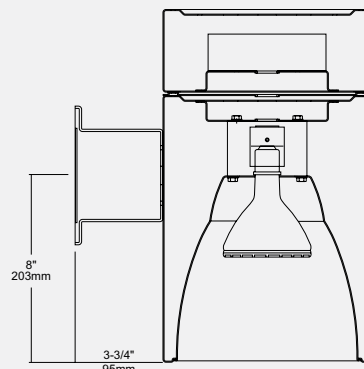


Wall Mount (ACYW8500)

Compatible Lamps

- Metal Halide, PAR38, 50W max.
- Metal Halide, ED17, 70W max.
- Metal Halide, BD17 (HPS), 100W max.

Icon Features

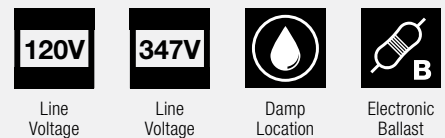

Ordering Guide

Housing	Ballast Voltage	Lamp Wattage	Finish	Reflector Finish	Options	Accessories
ACYC8500 : Ceiling Mount ACYW8500 : Wall Mount ACYP8500 : Pendant	H120 : 120V HPF H347 : 347V HPF	39 : 1 × 39 watt 50 : 1 × 50 watt 70 : 1 × 70 watt 100 : 1 × 100 watt	WH : White BK : Black BZ : Bronze	CL : Clear GD : Gold CP : Champagne HC : Haze Clear MA : Matte Platinum	WB : White Baffle Collar BB : Black Baffle Collar	ACPRK-48 : 48" Suspension Kit

Example: ACYC8500-H120-39-BZ-HC

TRACK SYSTEMS



Quick Find Index

MR16 Line Voltage (120V)

A-A01012  P 289	A-CL1370  P 290	A-MN1270  P 291	A-OR1013  P 292	A-S02012  P 293	A-VS1040  P 294
--	--	--	--	---	--

PAR Line Voltage (120V)

A-PAR220/20  P 295	A-PAR221/30  P 296	A-PAR222/38  P 297	A-PAR320/20  P 298	A-PAR321/30  P 299	A-PAR322/38  P 300	A-PAR422/38  P 301
---	---	---	---	--	---	---

ATF1010  P 302

MR16 Low Voltage (12V)

A-AA1010  P 303	A-A01012  P 304	A-DN1161  P 305	A-ER1150  P 306	A-GI1019  P 307	A-MU1481  P 308	A-NA1204  P 309
---	---	---	---	--	---	---

A-OR1013  P 310	A-Q01015  P 311	A-S02012  P 312	A-VS1040  P 313	A-XE1130  P 314	FP1248  P 315
--	--	--	--	---	--

AR111 Low Voltage (12V)

ATF3011  P 316

LED

ATF7001-1030  P 317
--

T5 High Output Fluorescent








A-FT03124H0  P 318	A-FT03224H0  P 319	A-FT03154H0  P 320	A-FT03254H0  P 321	A-FT04254H0  P 322
---	---	---	---	--

Biax Fluorotrack Fluorescent

A-BA0118  P 323	A-BA0218  P 324	A-BA0127  P 325	A-BA0227  P 326	A-BA0136  P 327	A-BA0236  P 328	A-BA0140  P 329
--	--	--	--	---	--	--

A-BA0240  P 330
--

Metal Halide

ATF5001  P 331	A-HID0300  P 332	A-HID0301  P 333	A-HID0520  P 334	A-HID0530  P 335	A-HID0538  P 336	A-HID0630  P 337
--	--	--	--	---	--	--

A-HID0638  P 338	A-HID0730  P 339	A-HID0830  P 340	A-HID01030  P 341
---	---	---	--

Track & Accessories

ATK  P 342	A-LEC6270  P 343	ATKC01  P 344	ATKC05  P 345	ATKP02  P 346	ATKP03  P 347	ATKP06  P 348
---	---	--	--	---	--	--

ATKP08  P 349	ATKP09  P 350	ATKP10  P 351	ATKP11  P 352	ATKP109  P 353	ATKA113  P 354	ATKA250S  P 355
--	--	--	--	--	---	--

Quick Find Index


Track & Accessories

<div>A-T56</div> <div></div> <div>P 356</div>	<div>ATKA320</div> <div></div> <div>P 357</div>	<div>ATKA321</div> <div></div> <div>P 358</div>
--	--	--

Extension Rods

<div>A-TDR</div> <div></div> <div>P 359</div>	<div>RODF</div> <div></div> <div>P 360</div>	<div>RODR</div> <div></div> <div>P 361</div>	<div>CN8450</div> <div></div> <div>P 362</div>	<div>ATKXW</div> <div></div> <div>P 363</div>
--	---	---	---	---

SINGLE CIRCUIT TRACK, CONNECTORS & POWER FEEDS

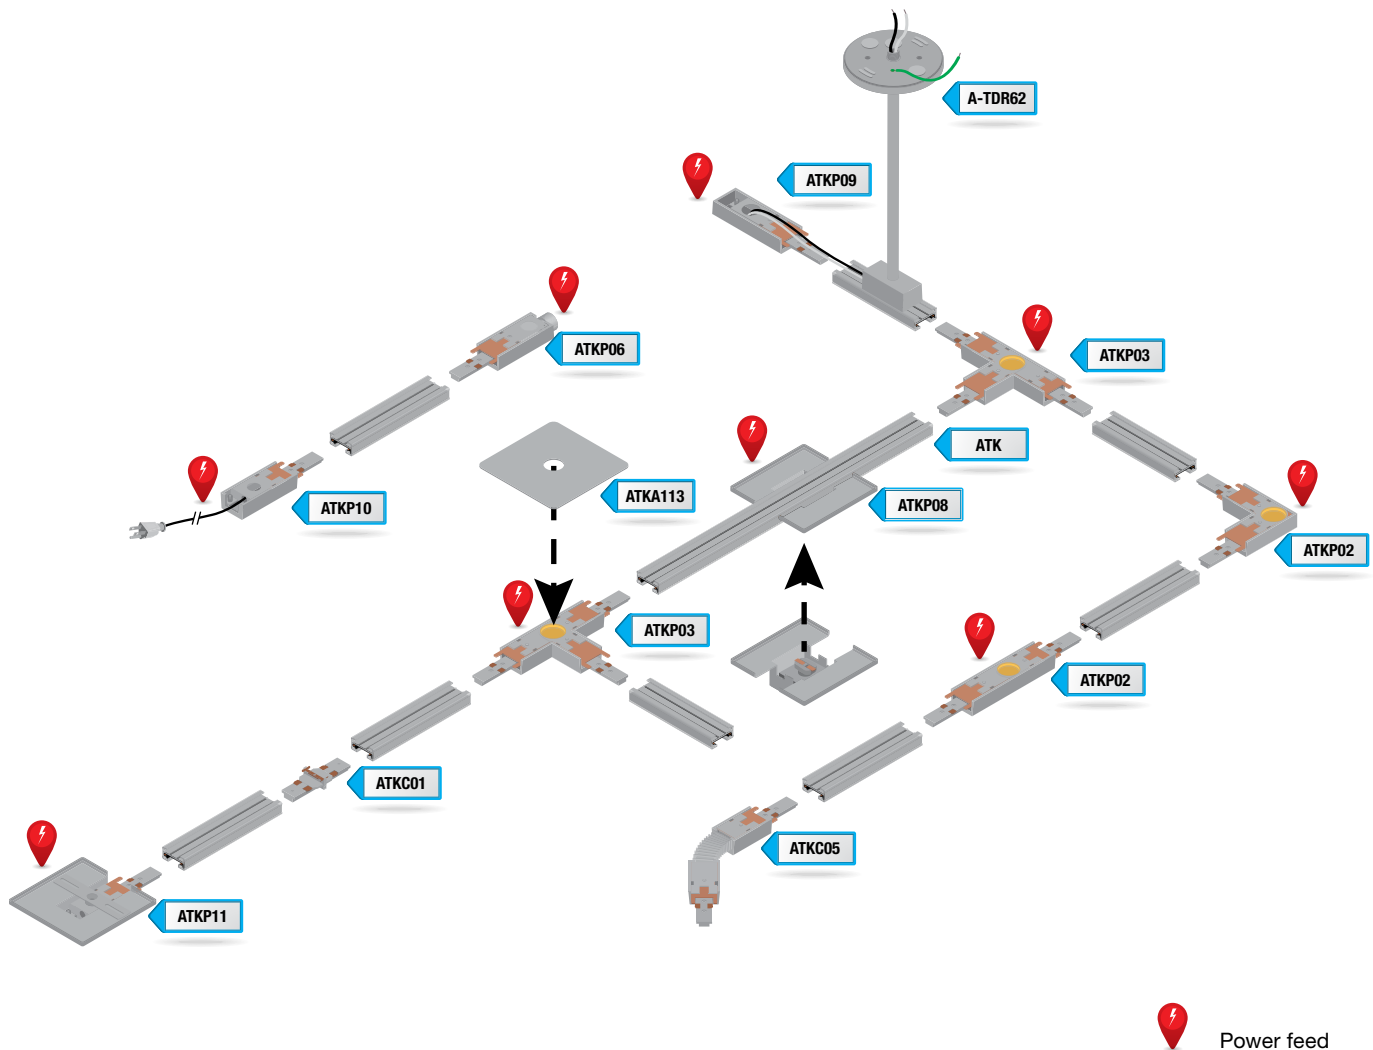

POWER FEEDS



ATKP02

L-Connector

Power feed, connect two sections of track, 180° or 90° (use **ATKA113** to cover electrical box).



ATKP09

Live End

Supplies power to section of track from end point.



ATKP03

T-Connector

Power feed, connect three sections of track (use **ATKA113** to cover electrical box).



ATKP10

Wired End


Supplies power to section of track from end point via a power cord.



ATKP06

Live End Conduit Feed

Power feed, supplies power to one end of the track.



ATKP11

Live End with Canopy

Supplies power to section of track from end point. Attached canopy covers any underlying electrical box.



ATKP08

Centre Feed


Supplies power at any point across the length of the track.



ATKP109

Monopoint

Provides power connection for single track fixture.

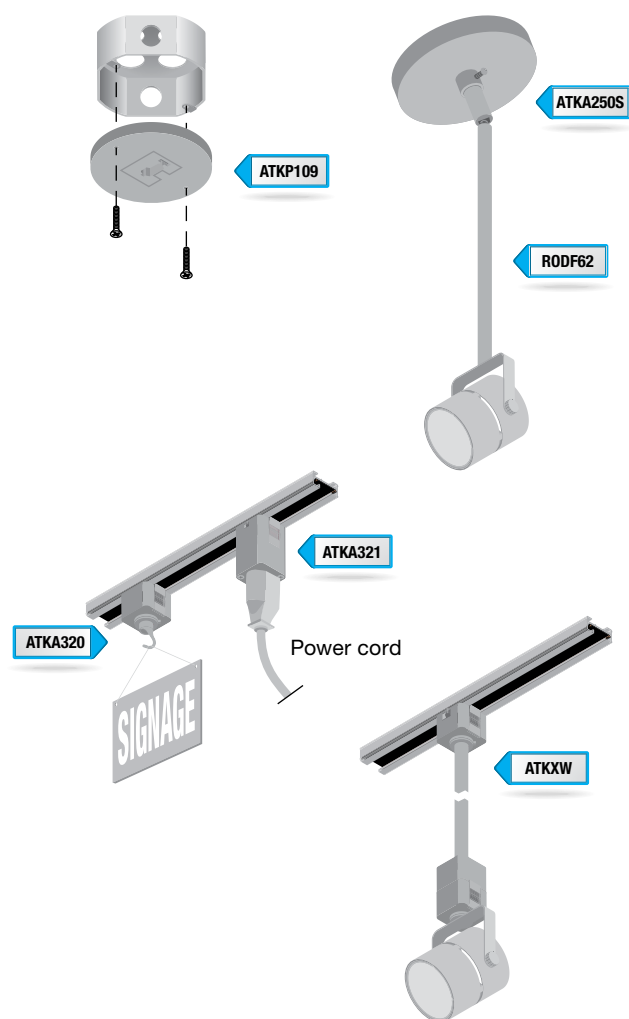


ACCESSORIES



ATKA113

Canopy Cover

Cover for electrical connection box. Used with **ATKP02** or **ATKP03**.



ATKA250S

Sloped Ceiling Canopy

Used in conjunction with down-rods to drop down track section from sloped ceiling.



ATKA320

Track Hook

Non-electric utility hook that attaches to a track section and capable of supporting objects up to **25** pounds.



ATKA321

Track Receptacle

Grounded receptacle that attaches to track. On/off switch on body for individual power control.



A-TDR62

Stem Rod Kit with Hollow Rod


Provides ability to drop track sections from ceiling at various heights with power feed concealed within the stem rod.



RODF62

Hollow Stem Suspension Rod

Used to extend distance between the track fixture and the connector. Can be used in conjunction with **ATKA250S**.



RODR62

Hollow Stem Rod with Nuts

Used in conjunction with **ATKA250S** or **A-TDR62** kits to extend track from ceiling.



CN8450

Dual Thread Hollow Coupling

Used to connect two hollow stem rods (**RODR62**) together.



ATKXW

Hollow Stem Suspension Rod

Used to extend A-Line track fixture from track at various heights. Includes on/off switch for individual power control.

CONNECTORS



ATKC01

I-Connector

Connects two sections of track together 180°.



ATKC05

Flexible Connector

Connects two sections of track together at variable angles up to 90°.

A-Line Track Connector



Top View



Side View



A-AO1012

APOLLO Track Fixture, 120V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming of 320° rotation and 160° tilt.

Dimming

Dimmable.


Lamping Options

MR16, covered lamp

- GU10, 50 watts max.
- LED GU10


Track Accessories

See pages 342-363



The APOLLO is a line voltage die cast aluminum designer fixture for MR16 GU10 120V lamps. It provides directional light source for specific aiming and assures a secure lock on the angle position.


Dimensions

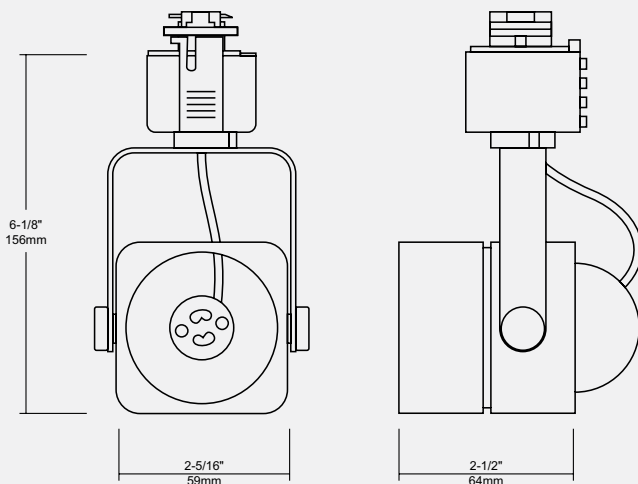


Compatible Lamps

- MR16 GU10, 50W max.
- LED, MR16 GU10

Icon Features

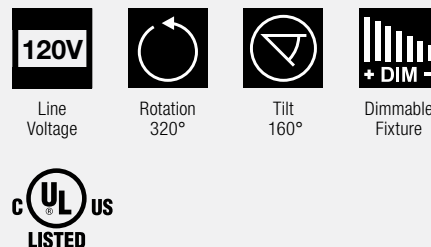

Ordering Guide

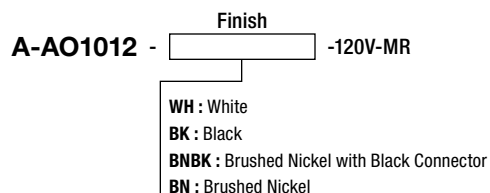

Example: A-AO1012-BK-120V-MR

Consult factory for more information on compatible dimmers.



A-CL1370

CLEO Track Fixture, 120V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming of 330° rotation and 90° tilt.

Dimming

Dimmable.

Lamping Options

MR16

- GU10, 50 watts max.
- LED GU10


Track Accessories

See pages 342-363



The CLEO is a die cast aluminum fixture. It features cylindrical body and design features. The single stem conceals wiring and provides full adjustment of light source for special aiming.


Dimensions

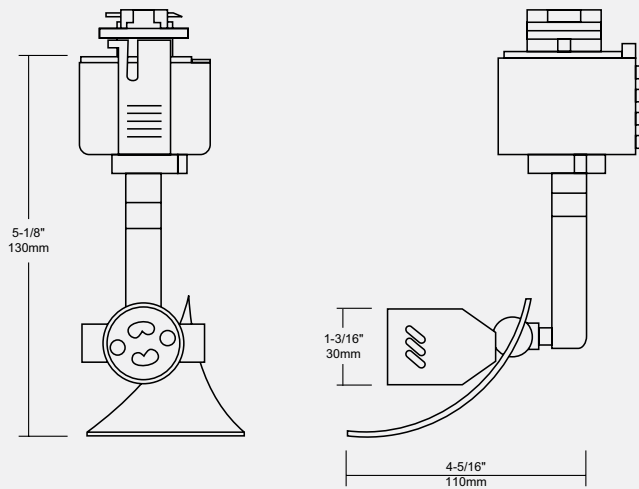


Compatible Lamps

- MR16 GU10, 50W max.
- LED, MR16 GU10

Icon Features

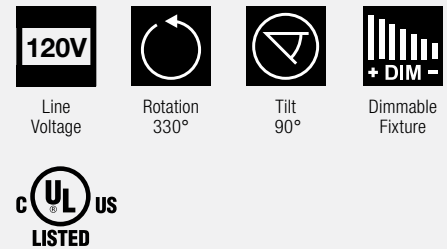

Ordering Guide

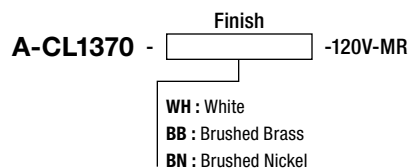

Example: A-CL1370-BN-120V-MR

Consult factory for more information on compatible dimmers.



A-MN1270

MILANO Track Fixture, 120V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming of 330° rotation and 90° tilt.

Dimming

Dimmable.

Lamping Options

MR16

- GU10, 50 watts max.
- LED GU10


Track Accessories

See pages 342-363



The MILANO is a die cast aluminum construction fixture with slanted back and no visible socket wire. Floating lamp trim is attached to body via a dual spring.


Dimensions

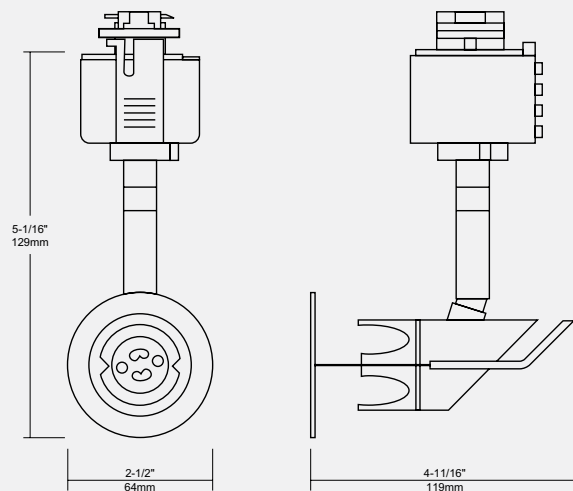


Compatible Lamps

- MR16 GU10, 50W max.
- LED, MR16 GU10

Icon Features

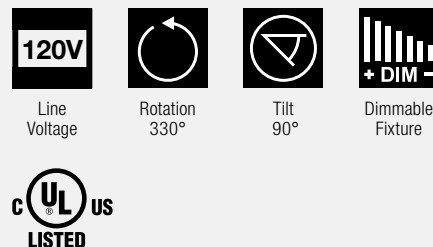


Ordering Guide

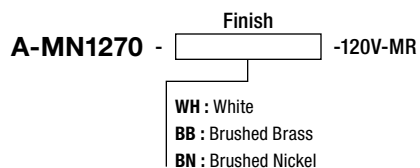

Example: A-MN1270-BB-120V-MR

Consult factory for more information on compatible dimmers.



The ORION is an adjustable gimbal ring fixture. MR16 lamp clips directly onto the adjustable gimbal ring.

A-OR1013

ORION Track Fixture, 120V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Adjustability

A steel L-bracket holds the gimbal ring in place and allows for full lateral aiming of 330°. A tightening knob assures secure lock on angle position of the gimbal trim, which provides for a 90° tilt.

Dimming

Dimmable.

Lamping Options


MR16, covered lamp

- GU10, 50 watts max.
- LED GU10

Track Accessories

See pages 342-363


Dimensions

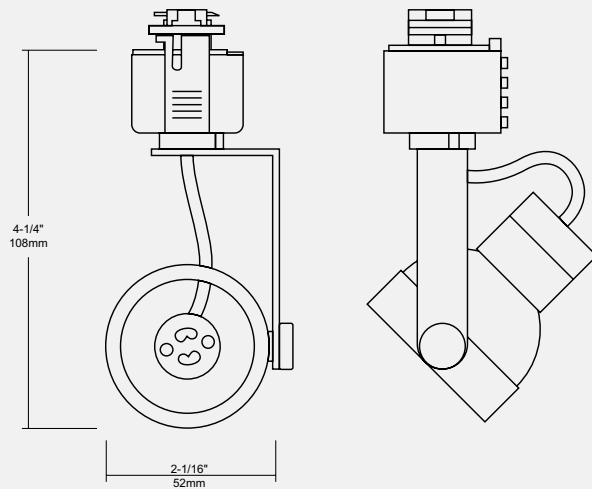

Compatible Lamps

- MR16 GU10, 50W max.
- LED, MR16 GU10

Icon Features

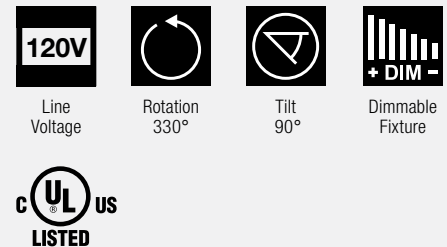

Ordering Guide

A-OR1013 - Finish -120V-MR
WH : White
BK : Black

Example: A-OR1013-WH-120V-MR

Consult factory for more information on compatible dimmers.



A-SO2012

SORA Track Fixture, 120V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming of 330° rotation and 160° tilt.

Dimming

Dimmable.


Lamping Options

MR16, covered lamp

- GU10, 50 watts max.
- LED GU10


Track Accessories

See pages 342-363

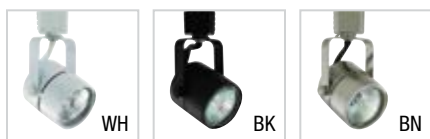

The SORA is a die cast directional spotlight that is ideal to brighten any home and add charm to any space, with its cylindrical shape and clean traditional look.


Dimensions

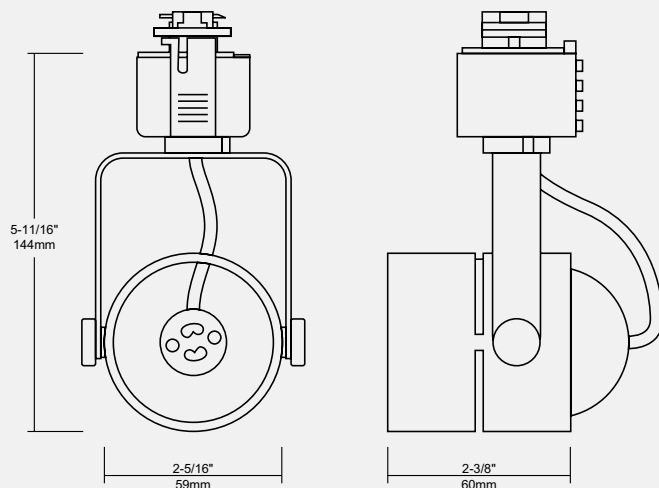


Compatible Lamps

- MR16 GU10, 50W max.
- LED, MR16 GU10

Icon Features

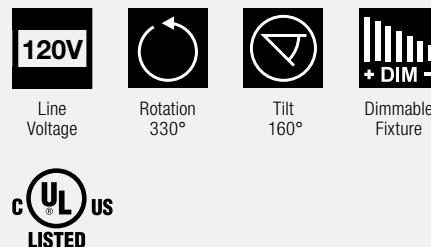

Ordering Guide

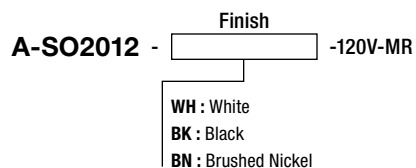

Example: A-SO2012-BK-120V-MR

Consult factory for more information on compatible dimmers.



A-VS1040

VENUS Track Fixture, 120V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming of 330° rotation and 90° tilt.

Dimming

Dimmable.

Lamping Options

MR16, covered lamp

- GU10, 50 watts max.
- LED GU10


Track Accessories

See pages 342-363



The VENUS is a die cast construction fixture with clear acrylic disk and no visible socket wire. The handle at the back of the fixture makes it easy to reposition the fixture to any desired angle.


Dimensions

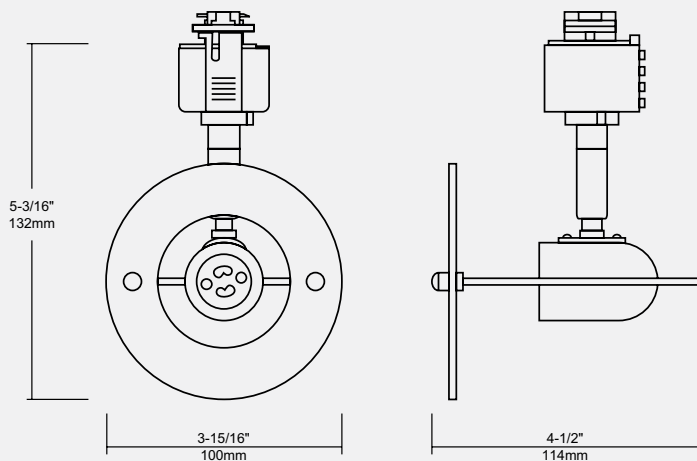

Compatible Lamps

- MR16 GU10, 50W max.
- LED, MR16 GU10

Icon Features

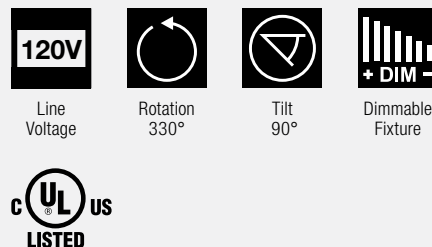

Ordering Guide

A-VS1040 - Finish -120V-MR
WH : White
BK : Black

Example: A-VS1040-WH-120V-MR

Consult factory for more information on compatible dimmers.



A-PAR220/20

PAR20 Rear Loading Track Fixture for PAR20 Lamps

Features

Re-lamping accessible from the rear. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Adjustability

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR20.


Lamping Options

PAR

- PAR20, 50 watts max.
- PAR20 CFL, 9 watts max.
- LED PAR20


Track Accessories

See pages 342-363

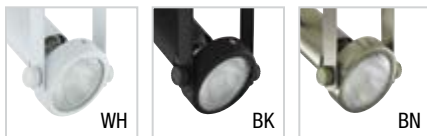

The A-PAR220/20 is a 120V die cast aluminum cylinder fixture for PAR20 light source. The A-PAR220/20 is a rear-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.


Dimensions

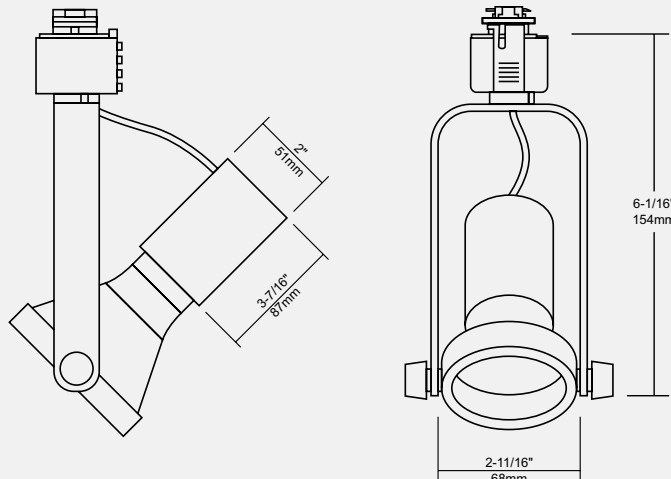


Compatible Lamps

- PAR20, 50W max.
- PAR20 CFL, 9W max.
- LED PAR20

Icon Features



Ordering Guide

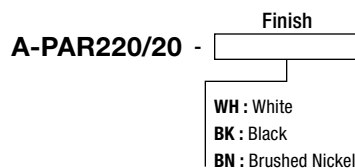

Example: A-PAR220/20-BK



A-PAR221/30

PAR30 Rear Loading Track Fixture for PAR30 Lamps

Features

Re-lamping accessible from the rear. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Aiming

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR30.


Lamping Options

PAR

- PAR30, 75 watts max.
- PAR30 CFL, 15 watts max.
- LED PAR30


Track Accessories

See pages 342-363



The A-PAR221/30 is a 120V die cast aluminum cylinder fixture for PAR30 light source. The A-PAR221/30 is a rear-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.


Dimensions

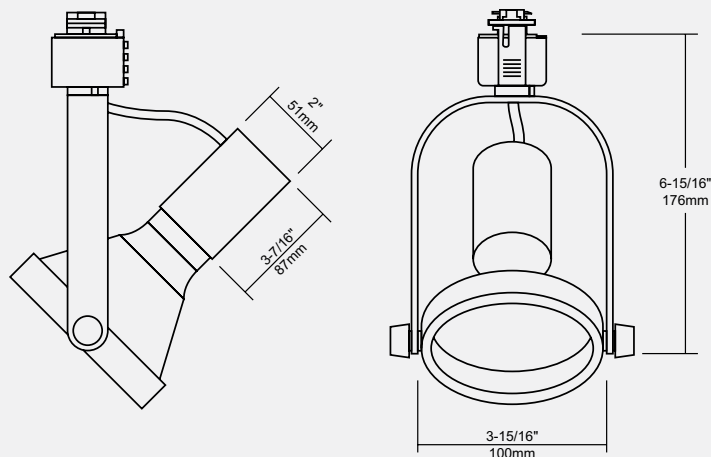

Compatible Lamps

- PAR30, 75W max.
- PAR30 CFL, 15W max.
- LED PAR30

Icon Features



Ordering Guide

A-PAR221/30 - **Finish**

WH : White
BK : Black
BN : Brushed Nickel

Example: A-PAR221/30-WH



A-PAR222/38

PAR38 Rear Loading Track Fixture for PAR38 Lamps

Features

Re-lamping accessible from the rear. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Aiming

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR38.

Lamping Options

PAR

- PAR38, 150 watts max.
- PAR38 CFL, 23 watts max.
- LED PAR38


Track Accessories

See pages 342-363



The A-PAR222/38 is a 120V die cast aluminum cylinder fixture for PAR38 light source. The A-PAR222/38 is a rear-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.


Dimensions

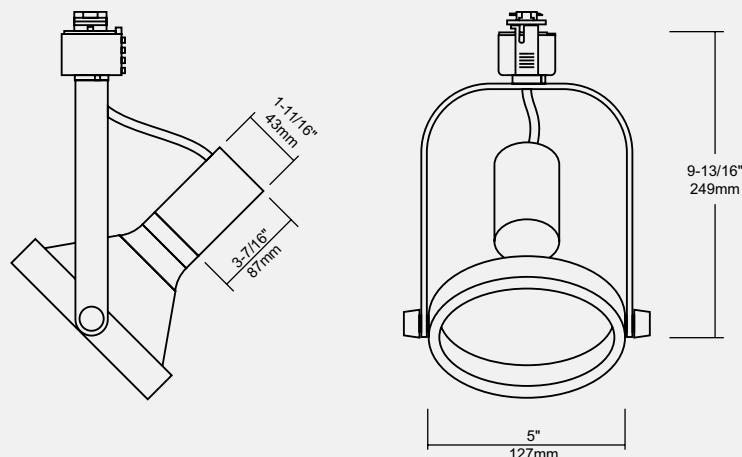

Compatible Lamps

- PAR38, 150W max.
- PAR38 CFL, 23W max.
- LED PAR38

Icon Features



Ordering Guide

Finish	
A-PAR222/38 -	
WH :	White
BK :	Black
BN :	Brushed Nickel

Example: A-PAR222/38-BN



The A-PAR320/20 is a 120V die cast aluminum cylinder fixture for PAR20 light source. The A-PAR320/20 is a front-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.

A-PAR320/20

PAR20 Front Loading Track Fixture for PAR20 Lamps

Features

Re-lamping accessible from the front. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Aiming

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR20.

Lamping Options


PAR

- PAR20, 50 watts max.
- PAR20 CFL, 9 watts max.
- LED PAR20

Track Accessories

See pages 342-363


Dimensions

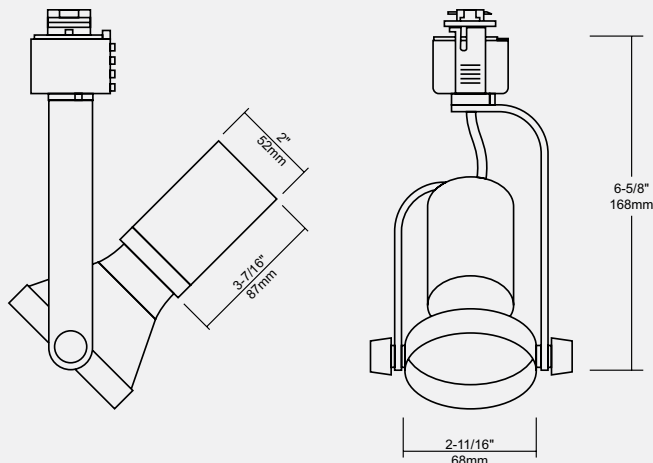

Compatible Lamps

- PAR20, 50W max.
- PAR20 CFL, 9W max.
- LED PAR20

Icon Features



Ordering Guide

A-PAR320/20	Finish
	WH : White
	BK : Black
	BN : Brushed Nickel

Example: A-PAR320/20-WH



A-PAR321/30

PAR30 Front Loading Track Fixture for PAR30 Lamps

Features

Re-lamping accessible from the front. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Aiming

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR30.

Lamping Options

PAR

- PAR30, 75 watts max.
- PAR30 CFL, 15 watts max.
- LED PAR30


Track Accessories

See pages 342-363



The A-PAR321/30 is a 120V die cast aluminum cylinder fixture for PAR30 light source. The A-PAR321/30 is a front-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.


Dimensions

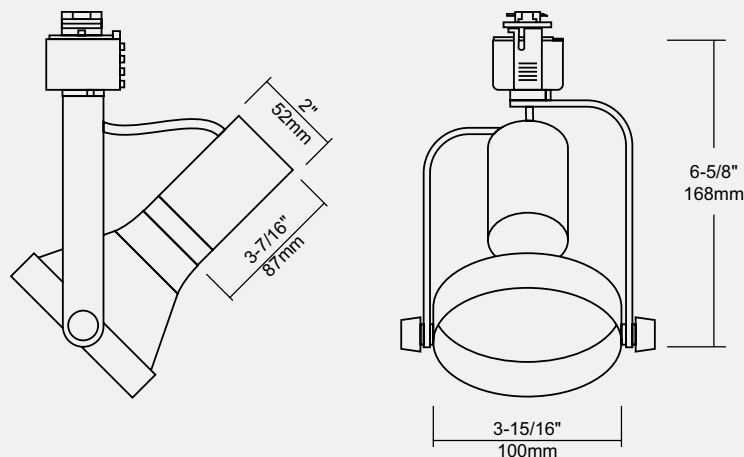


Compatible Lamps

- PAR30, 75W max.
- PAR30 CFL, 15W max.
- LED PAR30

Icon Features



Ordering Guide

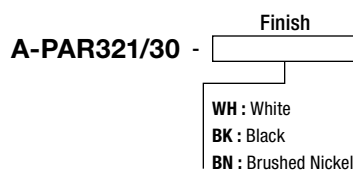

Example: A-PAR321/30-WH



The A-PAR322/38 is a 120V die cast aluminum cylinder fixture for PAR38 light source. The A-PAR322/38 is a front-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.

A-PAR322/38

PAR38 Front Loading Track Fixture for PAR38 Lamps

Features

Re-lamping accessible from the front. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Aiming

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR38.

Lamping Options


PAR

- PAR38, 150 watts max.
- PAR38 CFL, 23 watts max.
- LED PAR38

Track Accessories

See pages 342-363


Dimensions

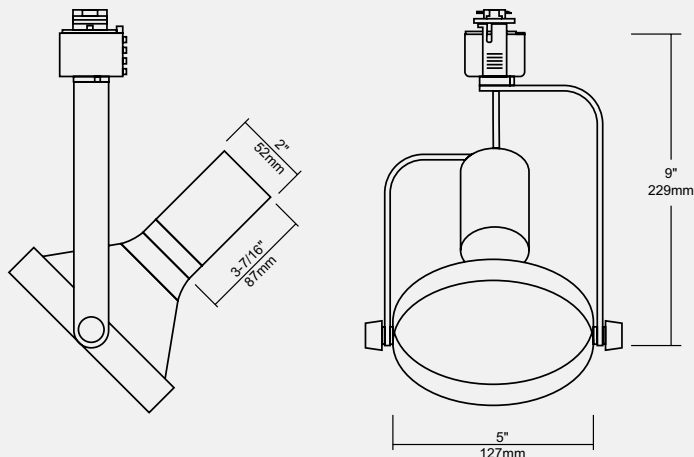


Compatible Lamps

- PAR38, 150W max.
- PAR38 CFL, 23W max.
- LED PAR38

Icon Features



Ordering Guide



Example: A-PAR322/38-BK



The A-PAR422/38 is a 120V die cast aluminum cylinder fixture for PAR38 light source. The A-PAR422/38 is a front-loading gimbal track fixture, which provides directional light source for special aiming and assures secure lock on angle position.

A-PAR422/38

PAR38 Front Loading Track Fixture for PAR38 Lamps

Features

Re-lamping accessible from the front. High strength stainless steel electrical contacts. Die cast aluminum construction; low profile cylinder with design features. All edges are softened for aesthetic appearance.

Aiming

The fixture provides custom aiming of 330° rotation and 90° tilt.

Electrical

Aluminum-coated wire lead connects socket and housing to electrical contact head. Coating is durable and resists heat degradation from lamp and housing radiation.

Socket

It accommodates a medium base lamp, for use with PAR30.


Lamping Options

- PAR
- PAR38, 150 watts max.
- PAR38 CFL, 23 watts max.
- LED PAR38

Track Accessories

See pages 342-363


Dimensions

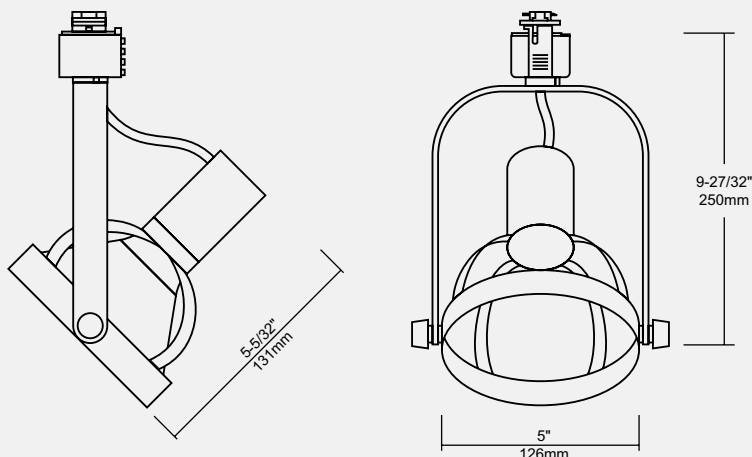


Compatible Lamps

- PAR38, 150W max.
- PAR38 CFL, 23W max.
- LED PAR38

Icon Features



Ordering Guide



Example: A-PAR422/38-WH



ATF1010

UNILAMP Line Voltage Track Fixture – 120V

Body

Constructed of die cast painted aluminum to provide superior strength and rigidity. All edges are softened for aesthetic appearances.

LED

- PAR20
- PAR30
- PAR38

Adjustability

Fixture provides a lateral rotation of 358° and an adjustable yoke that provides up to 90° tilt capability.

Track Accessories

See pages 342-363

Dimming

This fixture is dimmable using a standard dimmer.

Socket

Porcelain socket for 120V AC medium based lamps.

Optional Reflector

Fixture matching reflector is available in various sizes to match lamping option.

Lamping Options



Incandescent

- PAR20, 50 watts max.
- Short Neck PAR30, 75 watts max.
- PAR38, 250 watts max.



The ATF1010 is specially designed for indoor lighting applications such as display lighting, accent lighting, task lighting and wall wash applications. Available in a variety of shades to accommodate various PAR lamp sizes.

Dimensions

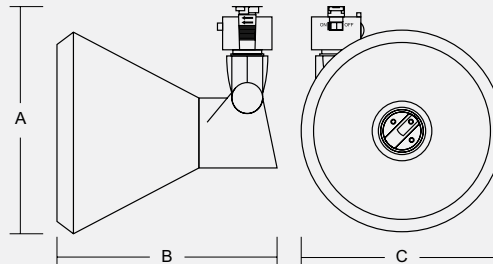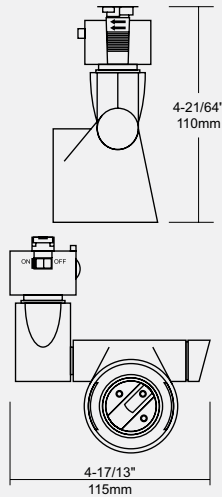


	A	B	C
ATF1010-20	5-5/8" 143mm	4-5/8" 117mm	3-9/16" 90mm
ATF1010-30	6-1/4" 159mm	5-5/16" 135mm	4-23/32" 120mm
ATF1010-38	6-7/8" 175mm	6-11/16" 170mm	6-3/32" 155mm


Compatible Lamps

- PAR20, 50W max.
- PAR30, 75W max.
- PAR38, 250W max.
- LED PAR20
- LED PAR30
- LED PAR38

Icon Features

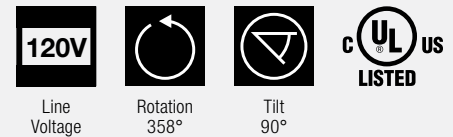

Ordering Guide

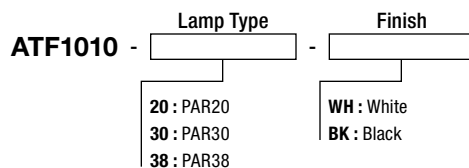

Example: ATF1010-20-BK

Note: ATF1010 can be sold separately without reflector.



A-AA1010

ALPHA Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping. Lead wires are completely concealed within the stem.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with dual knobs to secure angle position and provide custom aiming; 310° rotation and 80° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V
- LED
- MR16 (GU5.3), 12V


Track Accessories

See pages 342-363



The ALPHA is a razor back low voltage die cast aluminum track fixture for MR16 12V lamps. The ALPHA features a highly stylized yet simple form that has sleek proportions. It provides directional light source for specific aiming and assures a secure lock on the angle position.


Dimensions

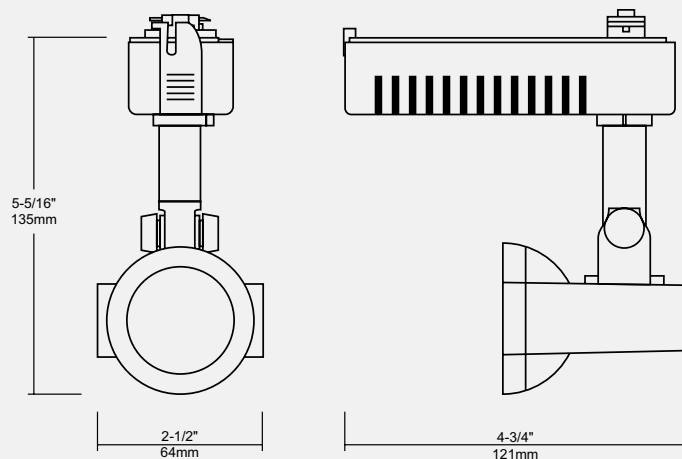


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

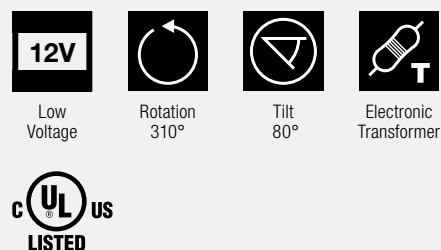

Ordering Guide



Example: A-AA1010-WH



A-AO1012

APOLLO Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming; 320° rotation and 160° tilt.

Lamping Options

Halogen, covered lamp


- MR16 (GU5.3), 50 watts max., 12V

LED

- MR16 (GU5.3), 12V


Track Accessories

See pages 342-363



The APOLLO is a low voltage die cast aluminum designer fixture for MR16 12V lamps. It provides directional light source for specific aiming and assures a secure lock on the angle position.


Dimensions

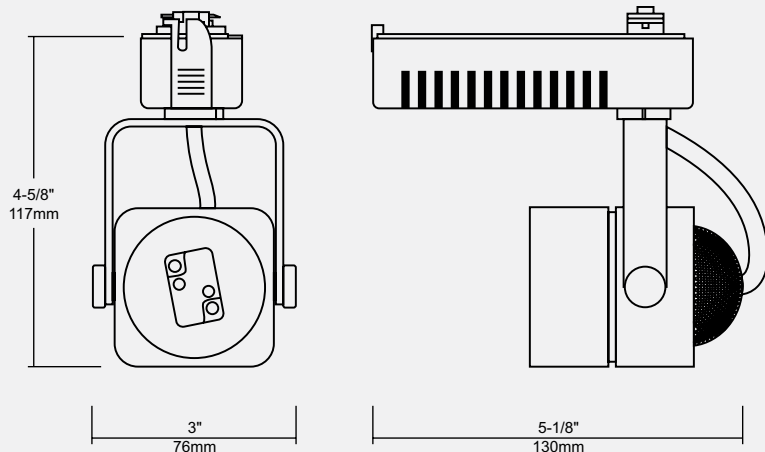


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)


Icon Features

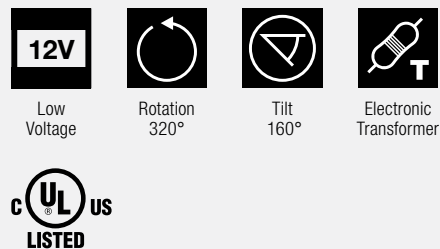

Ordering Guide



Example: A-AO1012-BK



The DIANA is a sleek and stylish designer track head, which features a cobalt blue ring and single stem design that conceals wiring. The DIANA track head provides full adjustment of light source for special aiming.

A-DN1161

DIANA Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V


LED

- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

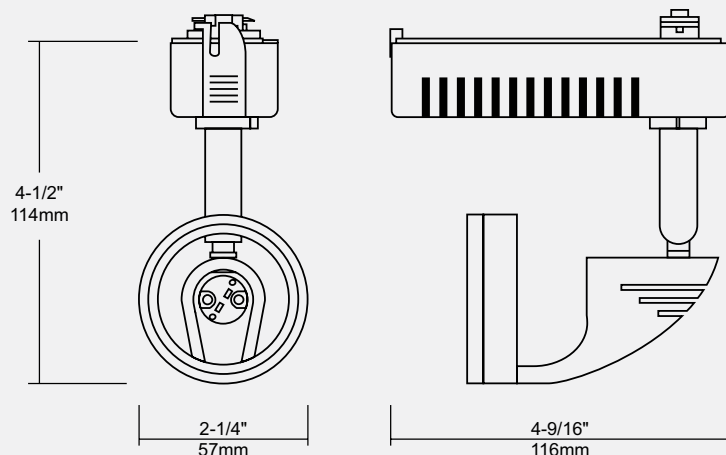


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

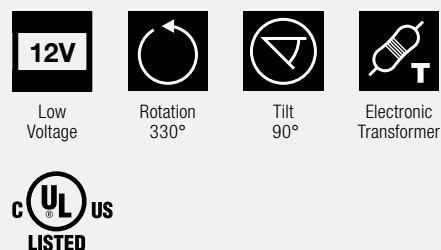

Ordering Guide



Example: A-DN1161-BK



The EROS is a disk-shaped directional spotlight, which features an all-sanded glass disk and single stem design that conceals wiring and provides full adjustment of light source for special aiming.

A-ER1150

EROS Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen

- MR16 (GU5.3), 50 watts max., 12V


LED

- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

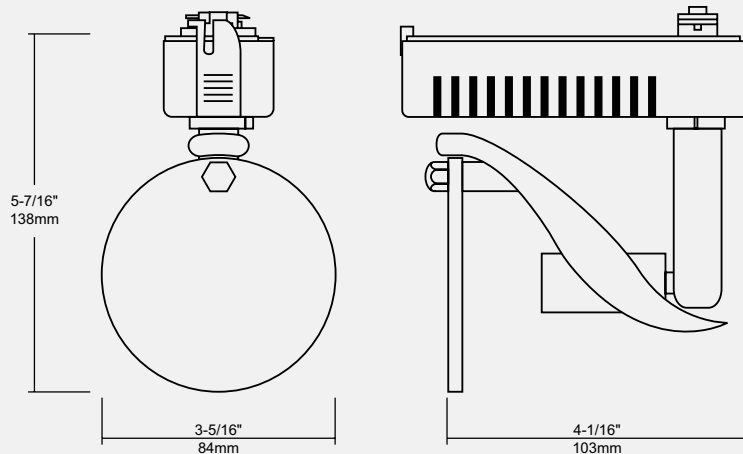


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

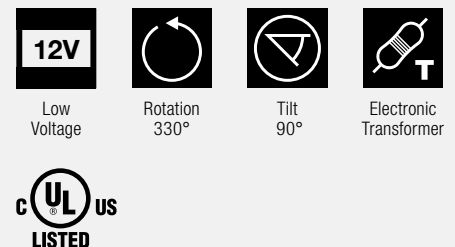

Ordering Guide



Example: A-ER1150-BK



A-GI1019

GEMINI Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable double yoke that would provide custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V

LED

- MR16 (GU5.3), 12V


Track Accessories

See pages 342-363



The GEMINI is a die cast construction track fixture with matching baffle, which features a double yoke that provides for secure locking on vertical angle position.


Dimensions

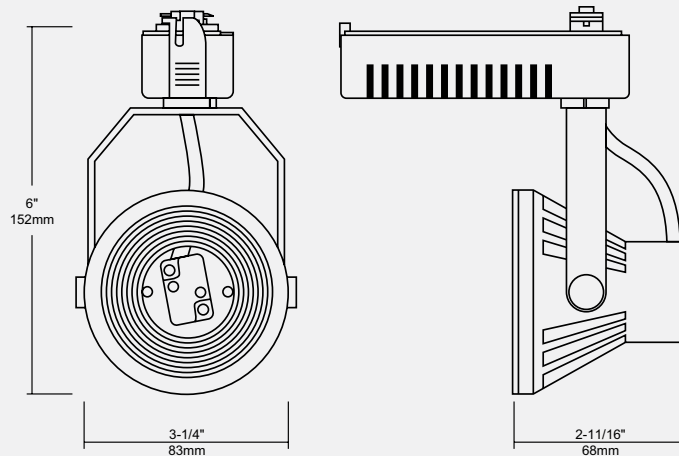


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

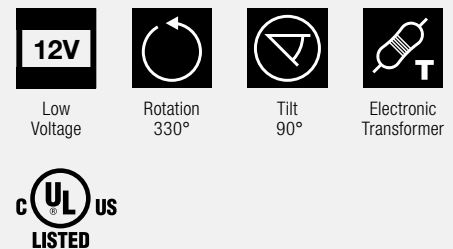

Ordering Guide



Example: A-GI1019-WH



The MURANO is a bullet shaped die cast aluminum construction designer fixture, which features a cobalt blue glass accent to complement the design of the track head.

A-MU1481

MURANO Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that would provide custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V


LED

- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

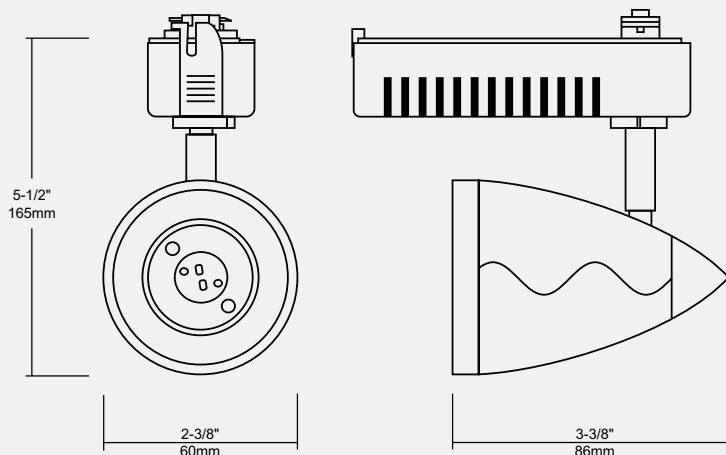


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

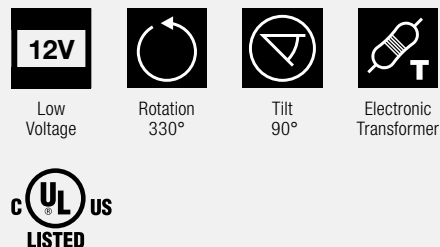

Ordering Guide



Example: A-MU1481-BN



The NOVA is a timeless round back step baffle track fixture that provides for a deep lamp shielding. The double yoke provides secure positioning for precise light source aiming.

A-NA1204

NOVA Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable double yoke that provides custom aiming; 330° rotation and 180° tilt.

Lamping Options


Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V
- LED
- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

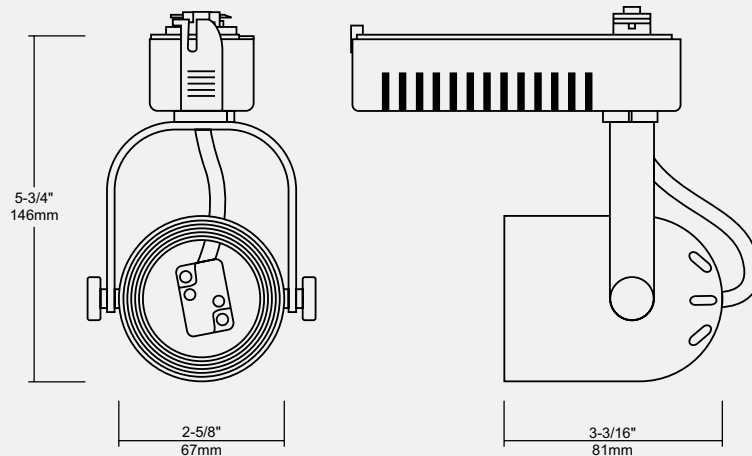


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

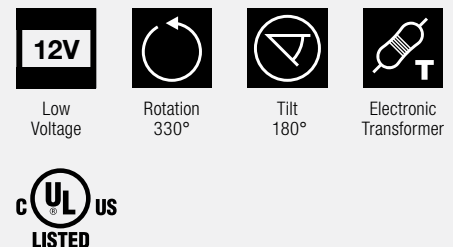

Ordering Guide



Example: A-NA1204-WH



A-OR1013

ORION Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that provides custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V

LED


- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363



WH




BK



BN

The ORION is a low voltage die cast aluminum track fixture for MR16 12V lamps, which features a minimalist design with a contemporary look. It provides directional light source for specific aiming and assures a secure lock on the angle position.

Dimensions

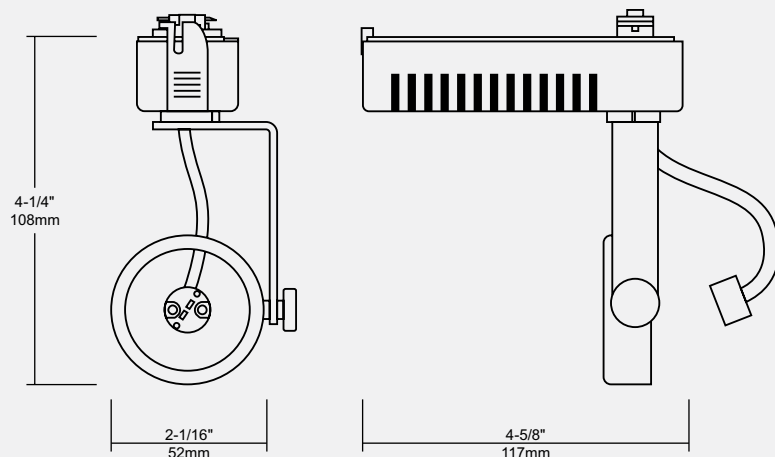

Compatible Lamps



Halogen, MR16, 50W max.



LED, MR16 (GU5.3)

Icon Features



Low Voltage



Rotation 330°



Tilt 90°



Electronic Transformer



Ordering Guide

Finish	
A-OR1013	-
WH	: White
BK	: Black
BN	: Brushed Nickel

Example: A-OR1013-BN



The QUATTRO is a stepped open design track head, which offers a single stem that conceals wiring and provides full adjustment of light source for special aiming. Dual tightening knobs assure secure lock on vertical angle position.

A-QO1015

QUATTRO Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that provides custom aiming; 330° rotation and 90° tilt.

Lamping Options


Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V
- LED
- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

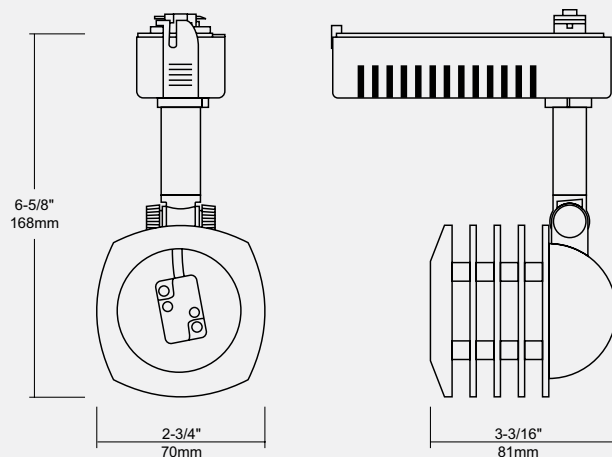


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)


Icon Features

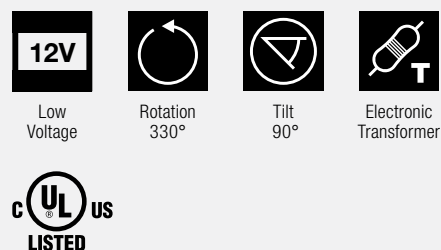

Ordering Guide



Example: A-QO1015-BK



The SORA is a die cast directional track head in a cylindrical shape and clean traditional look that brightens any home and adds charm.

A-SO2012

SORA Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that provides custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V


LED

- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

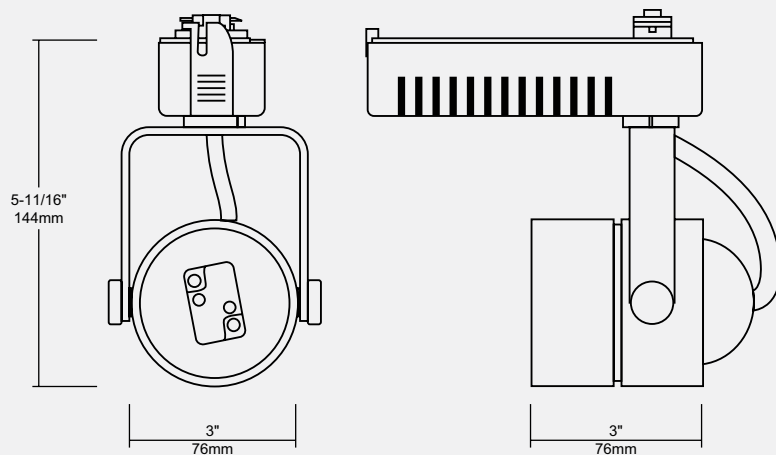


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

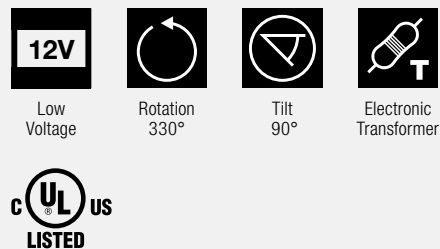

Ordering Guide



Example: A-SO2012-WH



A-VS1040

VENUS Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that provides custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen

- MR16 (GU5.3), 50 watts max., 12V

LED

- MR16 (GU5.3), 12V


Track Accessories

See pages 342-363



The VENUS is a die cast construction fixture with clear acrylic disk and no visible socket wire. The single stem design conceals wiring and provides full adjustment of light source for special aiming.


Dimensions

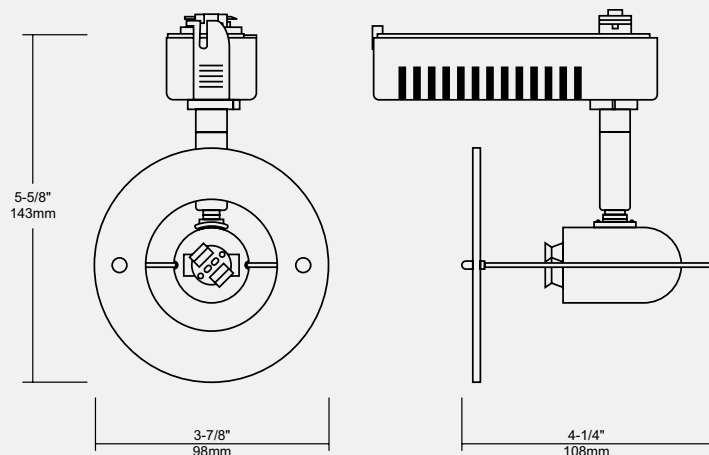


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

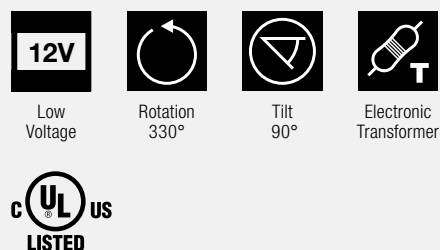

Ordering Guide



Example: A-VS1040-WH



The XENA is a bullet shaped die cast aluminum construction designer fixture, which features serrated sides that adds to the character of the fixture and provides easy gripping. XENA provides directional light source for specific aiming and assures a secure lock on the angle position.

A-XE1130

XENA Low Voltage Track Fixture for MR16 Lamps, 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that provides custom aiming; 330° rotation and 90° tilt.

Lamping Options

Halogen, covered lamp

- MR16 (GU5.3), 50 watts max., 12V


LED

- MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

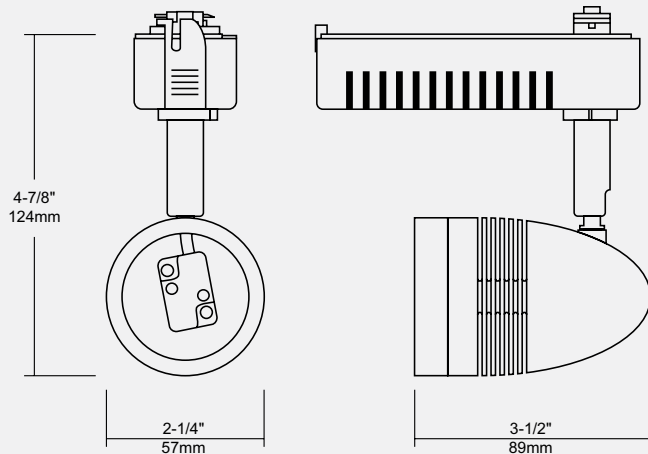


Compatible Lamps

- Halogen, MR16, 50W max.
- LED, MR16 (GU5.3)

Icon Features

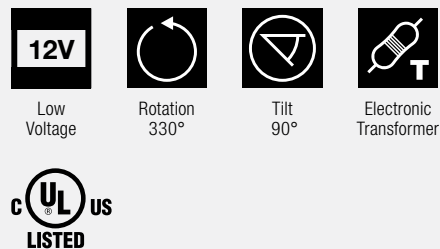

Ordering Guide



Example: A-XE1130-WH



This multi-functional track framing projector head features a distinctive extruded aluminum construction and ridged linear design, which is textured to minimize heat dissipation. The fixture features dual lenses for precise focus, beam concentrators, gobo holders and four framing shutters to allow precise light cutoff.

A-FP1248

Low Voltage Framing Projector for MR16 Lamps , 12V

Body

Constructed of extruded 0.08" aluminum, the body features a ridged linear texture to provide maximum heat dissipation. The front of the housing terminates with a bracket that would hold colour or other effect gels or filters. The top of the housing features a sliding door with screw lock revealing cavity with internal bracket to hold beam concentrator templates or gobo holders. The four sides of the housing contain slots for insertion of framing shutters (included) to cut output beam into a defined rectangle.

Beam Control

Two concave glass lenses inside the housing provide precise focusing for all three function – as a gobo projector, framing projector or beam concentrator – each connected to a tightening screw knob for independent positioning

Transformer

Solid state electronic transformer provide noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with two large plastic knobs that provide vertical angle setting for physically aiming the entire projector; 320° rotation and 135° tilt.


Lamping Options

- Halogen, covered lamp
- MR16 (GU5.3), 75 watts max., 12V LED
 - MR16 (GU5.3), 12V

Track Accessories

See pages 342-363


Dimensions

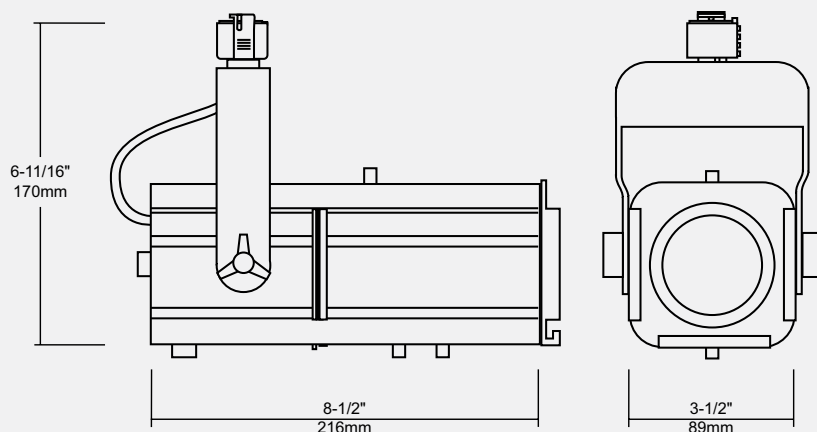


Compatible Lamps

- Halogen, MR16, 75W max.
- LED, MR16 (GU5.3)

Icon Features

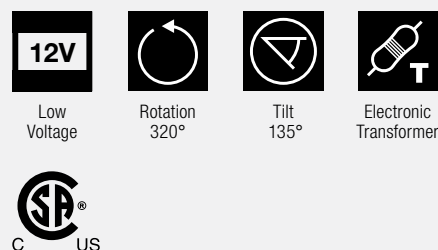

Ordering Guide



Example: FP1248-BK



The ATF3011 is specially designed for display and accent lighting. The versatile 360° directional lighting provides complete control of light positioning. The ATF3011 is ideal for indoor lighting applications such as display lighting, accent lighting, task lighting and wall wash applications. For use with AR111 lamps.

ATF3011

Low Voltage Track Fixture for AR111 Lamps , 12V

Body

Constructed of die cast aluminum, which provides superior strength and rigidity. Softened edges add to the low profile aesthetic design. Serrated sides for easy gripping.

Transformer

Solid state electronic transformer provides noise-free voltage reduction and operation. 120V AC to 12V AC.

Adjustability

Lamp housing is controlled with an adjustable yoke that provides custom aiming; 360° rotation and 180° tilt.

Lamping Options


Halogen, aluminum reflector

- AR111 (G53 base), 75 watts max., 12V


Track Accessories

See pages 342-363

Dimensions

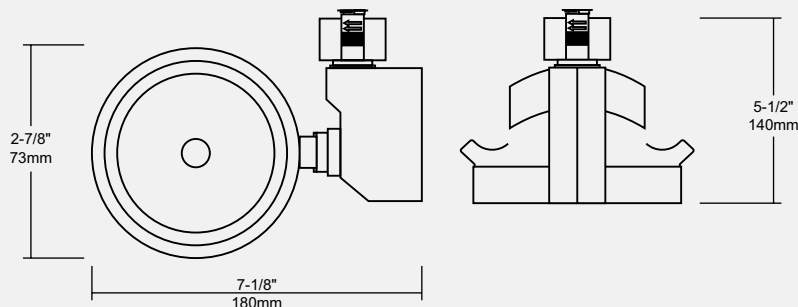

Compatible Lamps



Icon Features



Low
Voltage



Rotation
360°



Tilt
180°



Electronic
Transformer



Ordering Guide

ATF3011 - Finish
 WH : White
 BK : Black

Example: ATF3011-WH



ATF7001-1030

10W LED Track Fixture, 120V

Body

The durable extruded aluminum construction provides superior strength and durability. The fixture is designed to allow for heat dissipation. The aluminum reflector provides a 30° beam spread.

LED Driver

800mA constant current driver with 120V AC input.

Adjustability

Lamp housing is controlled with a yoke to secure angle position and provide custom aiming; 330° rotation and 90° tilt.

LED Engine

10-watt high-powered LED provides 370 lumens in 3000K correlated colour temperature. With no UV radiation and mercury-free, it is ideal for lighting UV sensitive objects.


Track Accessories

See pages 342-363




The ATF7001-1030 is a 10-watt high-powered LED track fixture, specially designed for display and accent lighting. The versatile directional lighting provides complete control of light positioning. Ideal for display lighting, accent lighting, task lighting and wall wash applications.


Dimensions

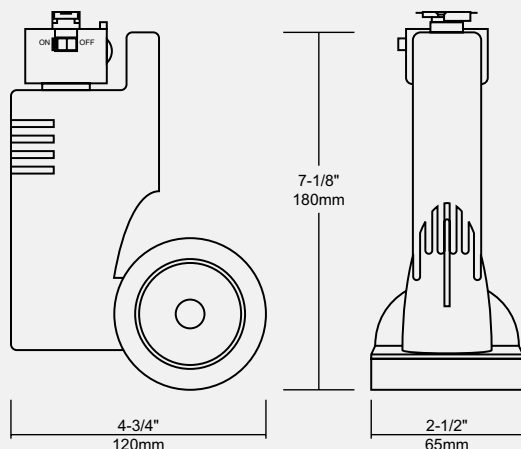

Icon Features



Ordering Guide

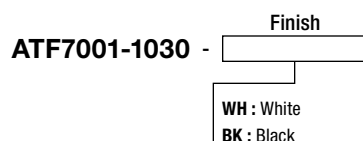

Example: ATF7001-1030-WH



The A-FT03124HO is a 2-ft track-mounted, energy-efficient, high output fluorescent fixture. It combines a super compact, single 24W high output T5 linear style. Suitable for retail and commercial wall wash and display lighting.

A-FT03124HO

24W Single High Output Fluorescent Track Fixture

Features

Single piece extruded aluminum housing with die cast end caps. Rotates vertically only. Powder-coated paint finish. Smooth and clean appearance.

Reflector and Louver

Specular aluminum reflector with precision reflection angles, which provides smooth illumination along wall space. Colour matching white powder coated louver that blends with housing. Easy removal, no tools required.

Mounting

Integral track mounting adapters with track polarity indicator. On/off switch on mounting adapter.

Electrical

Rapid start ballast at minimum starting temperature of -20°C. Integral compact, lightweight electronic ballasts are utilized for rated class P. End-of-life automatic shut-off circuit protection. 120V, 60Hz model.

Lamping Options


High Output Florescent Lamp

- T5
- * 1 × 24 watt

Track Accessories

See pages 342-363

Dimensions

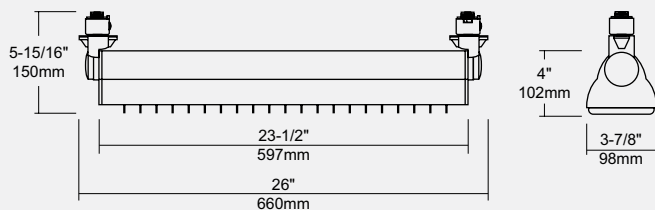

Compatible Lamps

Fluorescent, T5, 24W max.

Icon Features



Line
Voltage



Tilt
90°



Electronic
Ballast



Ordering Guide

A-FT03124HO - Finish
WH : White

Example: A-FT03124HO-WH



The A-FT03224HO is a 2-ft track-mounted, energy-efficient, high output fluorescent fixture. It combines a super compact, twin/double 24W high output T5 linear style. Suitable for retail and commercial wall wash and display lighting.

A-FT03224HO

24W Twin High Output Fluorescent Track Fixture

Features

Single piece extruded aluminum housing with die cast end caps. Rotates vertically only. Powder-coated paint finish. Smooth and clean appearance.

Reflector and Louver

Specular aluminum reflector with precision reflection angles, which provides smooth illumination along wall space. Colour matching white powder coated louver that blends with housing. Easy removal; no tools required.

Mounting

Integral track mounting adapters with track polarity indicator. On/off switch on mounting adapter.

Electrical

Rapid start ballast at minimum starting temperature of -20°C . Integral compact, lightweight electronic ballasts are utilized for rated class P. End-of-life automatic shut-off circuit protection. 120V, 60Hz model.

Lamping Options


High Output Florescent Lamp

- T5
- * 2×24 watt

Track Accessories

See pages 342-363

Dimensions

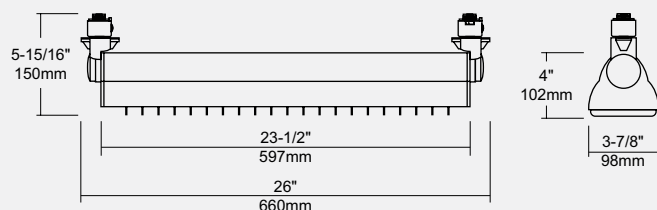

Compatible Lamps

Fluorescent, T5, 24W max.

Icon Features



Line
Voltage



Tilt
90°



Electronic
Ballast



Ordering Guide

A-FT03224HO - Finish
WH : White

Example: A-FT03224HO-WH



The A-FT03154HO is a 4-ft track-mounted, energy-efficient, high output fluorescent fixture. It combines a super compact, single 54W high output T5 linear style. Suitable for retail and commercial wall wash and display lighting.

A-FT03154HO

54W Single High Output Fluorescent Track Fixture

Features

Single piece extruded aluminum housing with die cast end caps. Rotates vertically only. Powder-coated paint finish. Smooth and clean appearance.

Reflector and Louver

Specular aluminum reflector with precision reflection angles, which provides smooth illumination along wall space. Colour matching white powder coated louver that blends with housing. Easy removal; no tools required.

Mounting

Integral track mounting adapters with track polarity indicator. On/off switch on mounting adapter.

Electrical

Rapid start ballast at minimum starting temperature of -20°C. Integral compact, lightweight electronic ballasts are utilized for rated class P. End-of-life automatic shut-off circuit protection. 120V, 60Hz model.

Lamping Options


High Output Florescent Lamp

- T5
- * 1 × 54 watt

Track Accessories

See pages 342-363

Dimensions

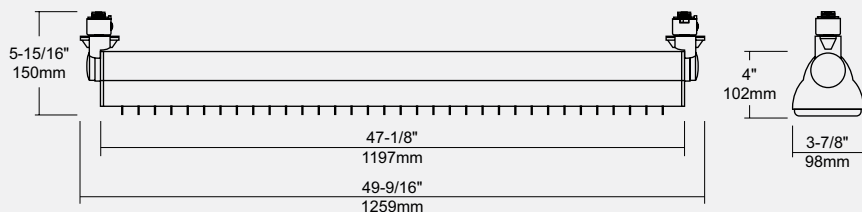

Compatible Lamps

Fluorescent, T5, 54W max.

Icon Features



Line
Voltage



Tilt
90°



Electronic
Ballast



Ordering Guide

A-FT03154HO - Finish
WH : White

Example: A-FT03154HO-WH



The A-FT03254HO is a 4-ft track-mounted, energy-efficient, high output fluorescent fixture. It combines a super compact, twin/double 54W high output T5 linear style. Suitable for retail and commercial wall wash and display lighting.

A-FT03254HO

54W Twin High Output Fluorescent Track Fixture

Features

Single piece extruded aluminum housing with die cast end caps. Rotates vertically only. Powder-coated paint finish. Smooth and clean appearance.

Reflector and Louver

Specular aluminum reflector with precision reflection angles, which provides smooth illumination along wall space. Colour matching white powder coated louver that blends with housing. Easy removal; no tools required.

Mounting

Integral track mounting adapters with track polarity indicator. On/off switch on mounting adapter.

Electrical

Rapid start ballast at minimum starting temperature of -20°C . Integral compact, lightweight electronic ballasts are utilized for rated class P. End-of-life automatic shut-off circuit protection. 120V, 60Hz model.

Lamping Options


High Output Florescent Lamp

- T5
- * 2×54 watt

Track Accessories

See pages 342-363


Dimensions

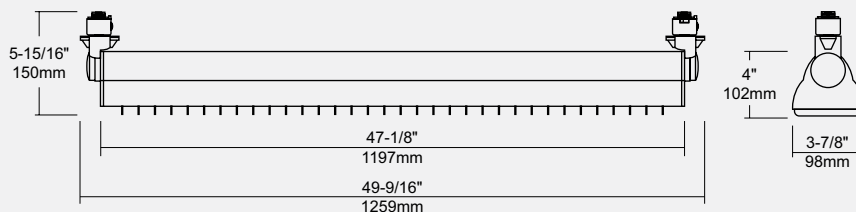

Compatible Lamps

Fluorescent, T5, 54W max.

Icon Features



Ordering Guide

A-FT03254HO - Finish
WH : White

Example: A-FT03254HO-WH



The A-FT04254HO is a 4-ft track-mounted, energy-efficient, high output fluorescent fixture. It combines a super compact, twin/double 54W high output T5 linear style. Suitable for retail and commercial wall wash and display lighting.

A-FT04254HO

54W Twin High Output Fluorescent Track Fixture

Features

Single piece extruded aluminum housing with die cast end caps. Rotates vertically only. Powder-coated paint finish. Smooth and clean appearance.

Reflector and Louver

Specular aluminum reflector with precision reflection angles, which provides smooth illumination along wall space. Specular silver louver that blends with housing. Easy removal; no tools required.

Mounting

Integral track mounting adapters with track polarity indicator. On/off switch on mounting adapter.

Electrical

Rapid start ballast at minimum starting temperature of -20°C. Integral compact, lightweight electronic ballasts are utilized for rated class P. End-of-life automatic shut-off circuit protection. 120V, 60Hz model.

Lamping Options



High Output Florescent Lamp

- T5
- * 2 × 54 watt

Track Accessories

See pages 342-363

Dimensions

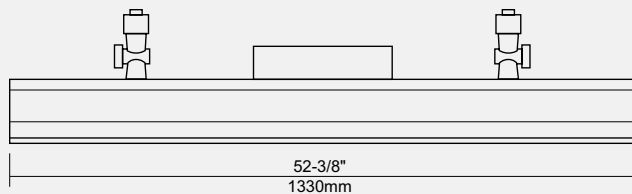

Compatible Lamps

Fluorescent, T5, 54W max.

Icon Features



Line
Voltage



Tilt
90°



Electronic
Ballast



Ordering Guide

A-FT04254HO - Finish
WH : White

Example: A-FT04254HO-WH



A-BA0118

18W Single Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Dual positioning swivels on track adapters. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Single point mounting with on/off switch on mounting adapter. The fixture easily tilts 90° and has a 330° rotation.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent

• Biax™

* 1 × 18 watt


Track Accessories

See pages 342-363



The A-BA0118 is an extruded aluminum 12-1/4" compact fluorescent track fixture incorporating a single Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.


Dimensions

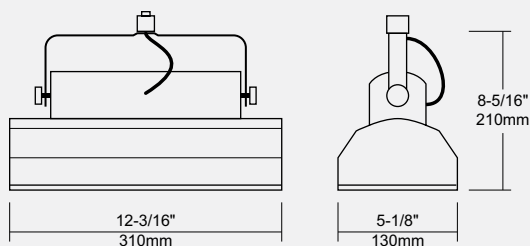

Compatible Lamps

Fluorescent, BIAx, 18W max.

Icon Features



Ordering Guide

A-BA0118 - Finish
WH-PL : White
BK-PL : Black
BN-PL : Brushed Nickel

Example: A-BA0118-WH-PL

Biax™ is a registered trademark of General Electric Co.



A-BA0218

18W Twin Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Dual positioning swivels on track adapters. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Single point mounting with on/off switch on mounting adapter. The fixture easily tilts 90° and has a 330° rotation.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent

• Biax™

* 2 × 18 watt

Track Accessories

See pages 342-363



WH-PL




BK-PL



BN-PL

The A-BA0218 is an extruded aluminum 12-1/4" compact fluorescent track fixture incorporating a twin Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.

Dimensions

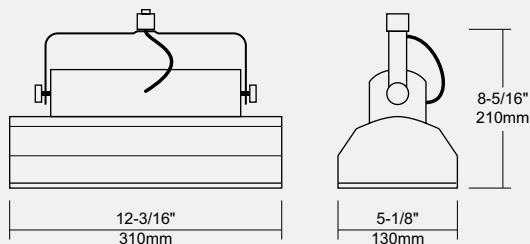

Compatible Lamps

Fluorescent, BIAx, 18W max.

Icon Features



Line
Voltage



Rotation
330°



Tilt
90°



Electronic
Ballast



Ordering Guide

A-BA0218 - Finish
WH-PL : White
BK-PL : Black
BN-PL : Brushed Nickel

Example: A-BA0218-BK-PL

Biax™ is a registered trademark of General Electric Co.



A-BA0127

27W Single Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Rotates vertically only. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Dual point mounting with on/off switch on mounting adapter.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent

- Biax™
- * 1 × 27 watt

Track Accessories

See pages 342-363



WH-PL




BK-PL



BN-PL

The A-BA0127 is an extruded aluminum 14-1/4" compact fluorescent track fixture incorporating a single Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.

Dimensions

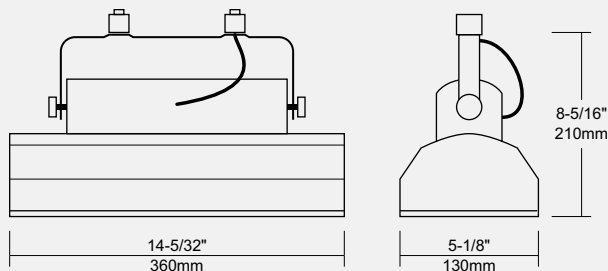

Compatible Lamps

Fluorescent, BIAx, 27W max.

Icon Features



Line Voltage



Tilt 90°



Electronic Ballast



Ordering Guide

A-BA0127 - Finish

WH-PL : White
BK-PL : Black
BN-PL : Brushed Nickel

Example: A-BA0127-WH-PL

Biax™ is a registered trademark of General Electric Co.



WH-PL



BK-PL



BN-PL

The A-BA0227 is an extruded aluminum 14-1/4" compact fluorescent track fixture incorporating a twin Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.

A-BA0227

27W Twin Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Rotates vertically only. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Dual point mounting with on/off switch on mounting adapter.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent


• Biax™

* 2 × 27 watt

Track Accessories

See pages 342-363

Dimensions

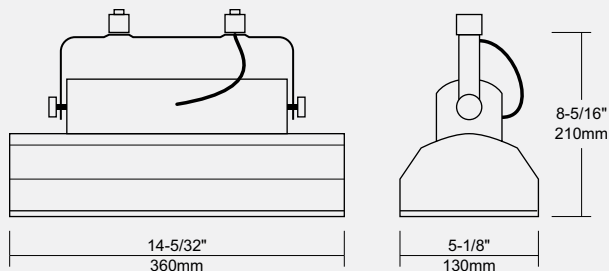

Compatible Lamps

Fluorescent, BIAx, 27W max.

Icon Features



Line
Voltage



Tilt
90°



Electronic
Ballast



Ordering Guide

A-BA0227 - Finish

WH-PL : White
BK-PL : Black
BN-PL : Brushed Nickel

Example: A-BA0227-BN-PL

Biax™ is a registered trademark of General Electric Co.



A-BA0136

36W Single Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Rotates vertically only. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Dual point mounting with on/off switch on mounting adapter.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent

• Biax™

* 1 × 36 watt


Track Accessories

See pages 342-363



The A-BA0136 is an extruded aluminum 18" compact fluorescent track fixture incorporating a single Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.


Dimensions

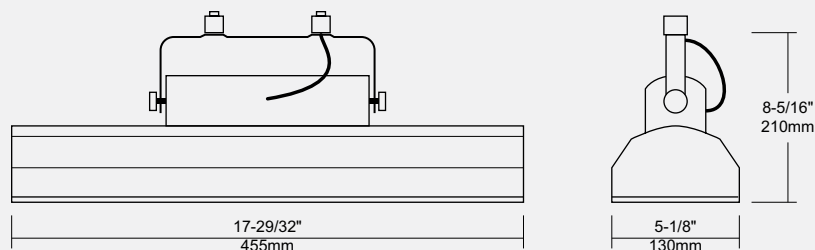

Compatible Lamps

Fluorescent, BIAx, 36W max.

Icon Features



Ordering Guide


A-BA0136 - Finish
 WH-PL : White
 BK-PL : Black
 BN-PL : Brushed Nickel

Example: A-BA0136-WH-PL

Biax™ is a registered trademark of General Electric Co.



WH-PL



BK-PL



BN-PL

The A-BA0236 is an extruded aluminum 18" compact fluorescent track fixture incorporating a twin Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.

A-BA0236

36W Twin Lamp Fluorotrack Fluorescent Track Head

Features

Single piece die cast aluminum with end caps welded in place. Rotates vertically only. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Dual point mounting with on/off switch on mounting adapter.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent



• Biax™

* 2 × 36 watt

Track Accessories

See pages 342-363

Dimensions

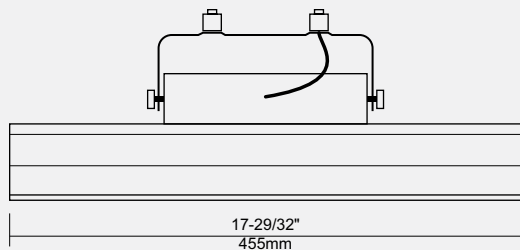

Compatible Lamps

Fluorescent, BIAx, 36W max.

Icon Features



Line
Voltage



Tilt
90°



Electronic
Ballast



Ordering Guide

A-BA0236 - Finish
WH-PL : White
BK-PL : Black
BN-PL : Brushed Nickel

Example: A-BA0236-WH-PL

Biax™ is a registered trademark of General Electric Co.



A-BA0140

40W Single Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Rotates vertically only. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Dual point mounting with on/off switch on mounting adapter.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.

Lamping Options

Compact Fluorescent

- Biax™
- * 1 × 40 watt


Track Accessories

See pages 342-363



The A-BA0140 is an extruded aluminum 24-1/2" compact fluorescent track fixture incorporating single Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.


Dimensions

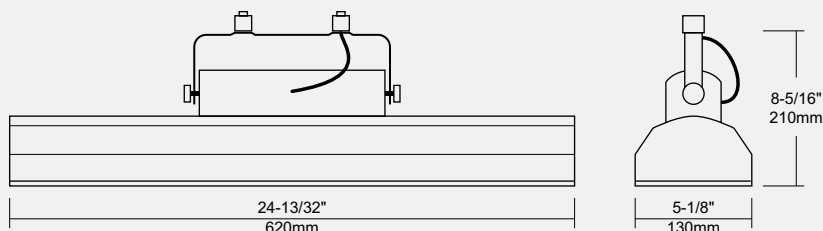

Compatible Lamps

Fluorescent, BIAX, 40W max.

Icon Features



Ordering Guide

A-BA0140 - **Finish**
 WH-PL : White
 BK-PL : Black
 BN-PL : Brushed Nickel

Example: A-BA0140-BK-PL

Biax™ is a registered trademark of General Electric Co.



The A-BA0240 is an extruded aluminum 24-1/2" compact fluorescent track fixture incorporating a twin Biax™ lamp source. Integral electronic ballast provides efficient and quiet power for Biax™ lamps. Heavy duty yoke allows full vertical and lateral adjustment on the fixture. Dual tightening knobs assure secure lock on vertical angle position.

A-BA0240

40W Twin Lamp Fluorotrack Fluorescent Track Fixture

Features

Single piece die cast aluminum with end caps welded in place. Rotates vertically only. Powder-coated paint finish in a smooth and clean appearance. No exposed fasteners.

Reflector and Louver

High efficiency specular reflector provides maximum lamp performance. Parabolic injection-molded specular louver for high efficiency and excellent lamp shielding. Louver can be removed without tools for convenient re-lamping.

Mounting

Integral track mounting adapters. Dual point mounting with on/off switch on mounting adapter.

Electrical

Integral compact, lightweight High Power Factor (HPF) electronic ballast with 120V input at 60Hz operation and Class P sound-rated.

Socket

4-pin socket accepts 2G11 base Biax™ compact fluorescent light sources.


Lamping Options

Compact Fluorescent
• Biax™
* 2 × 40 watt

Track Accessories

See pages 342-363


Dimensions

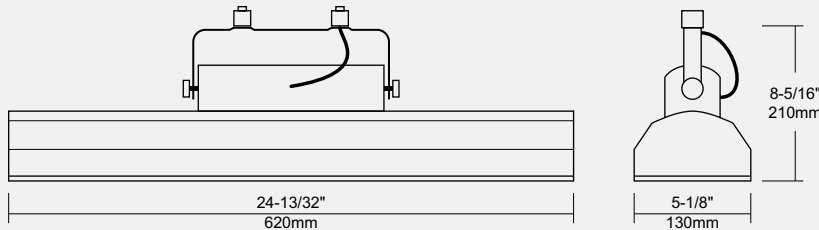

Compatible Lamps

Fluorescent, BIAX, 40W max.

Icon Features



Ordering Guide

A-BA0240 - **Finish**

WH-PL : White
BK-PL : Black
BN-PL : Brushed Nickel

Example: A-BA0240-WH-PL

Biax™ is a registered trademark of General Electric Co.



ATF5001

Metal Halide Track Fixture

Body

Constructed of die cast aluminum provides superior strength and rigidity. All edges are softened for aesthetic appearance. Textured powder-coat paint finish.

Adjustability

The fixture easily moves with 90° tilt and 330° rotational.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Solid state electronic high power factor ballast.

Socket

GX10 twist-lock 5KV-rated socket for MR16 ceramic metal halide lamps.

Lamping Options

Metal Halide

- MR16 CMH
 - * 20 watt
 - * 35 watt


Track Accessories

See pages 342-363



The ATF5001 is specially designed for display and accent lighting, this versatile directional lighting fixture provides complete control of light positioning. This fixture is ideal for indoor lighting applications such as display lighting, accent lighting, task lighting and wall wash applications.


Dimensions

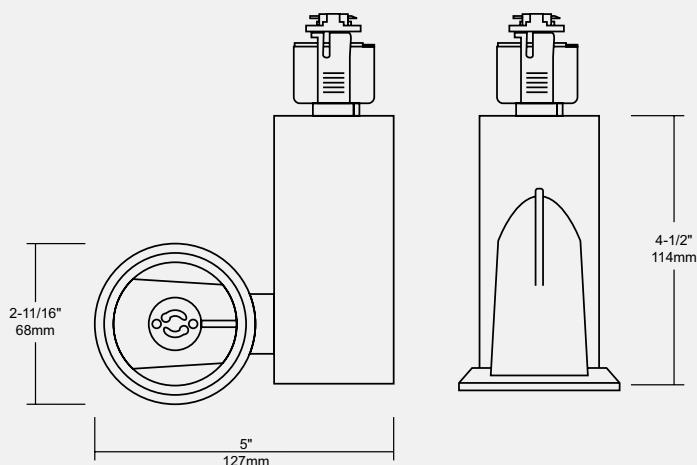


Compatible Lamps

Metal Halide, MR16, 35W max.

Icon Features

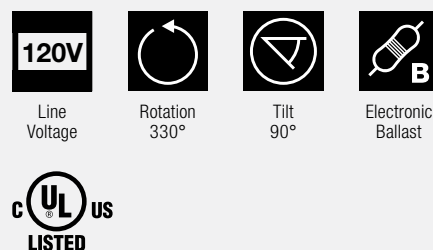

Ordering Guide

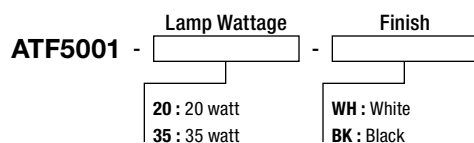

Example: ATF5001-35-WH



The A-HID 0300 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W or 100W PAR metal halide lamp sources for directional lighting.

A-HID0300

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Deep drawn housing construction for high strength and rigidity. Single piece cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 90° tilt.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based metal halide lamps.


Lamping Options

- Metal Halide
- PAR38 MH
- * 70 watt
- * 100 watt

Track Accessories

See pages 342-363

Dimensions

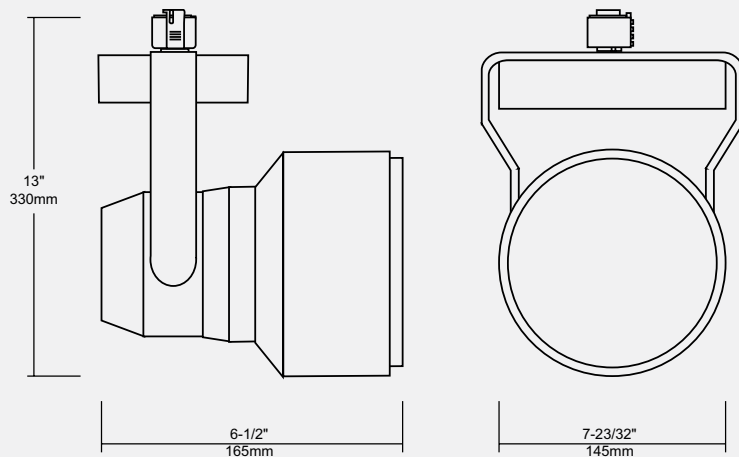

Compatible Lamps


- Metal Halide, PAR38, 100W max.

Icon Features

- Line Voltage
- Rotation 358°
- Tilt 90°
- Electronic Ballast



Ordering Guide

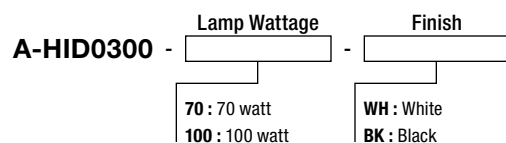

Example: A-HID0300-70-WH



A-HID0301

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Deep drawn housing construction for high strength and rigidity. Single piece cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish. A tension spring is provided to maintain the lens in the proper position within the aperture sleeve. Lens is included.

Adjustability

The fixture provides custom aiming of 358° rotation and 90° tilt.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based lamp metal halide lamps.

Lamping Options

Metal Halide

- ED17 MH
- * 50 watt
- * 70 watt
- * 100 watt


Track Accessories

See pages 342-363



The A-HID0301 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W or 100W PAR metal halide lamp sources for directional lighting.


Dimensions

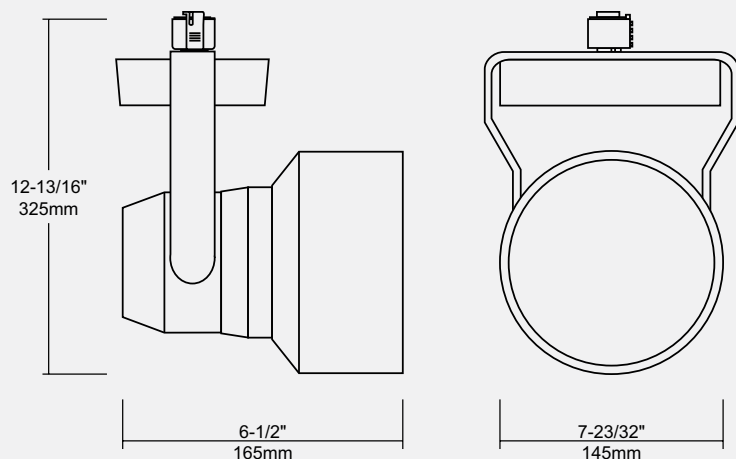


Compatible Lamps

Metal Halide, ED17, 100W max.

Icon Features

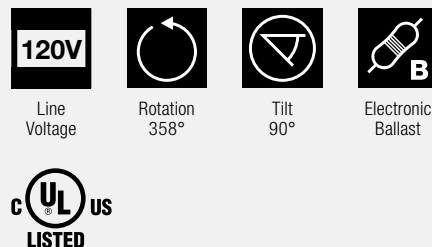

Ordering Guide

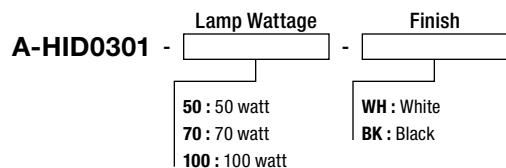

Example: A-HID0301-70-BK



The A-HID0520 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 39W metal halide lamp.

A-HID0520

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Deep drawn housing construction for high strength and rigidity. Single piece cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 60° tilt.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based lamp metal halide lamps.


Lamping Options

- Metal Halide
- PAR20 MH
- * 39 watt

Track Accessories

See pages 342-363


Dimensions

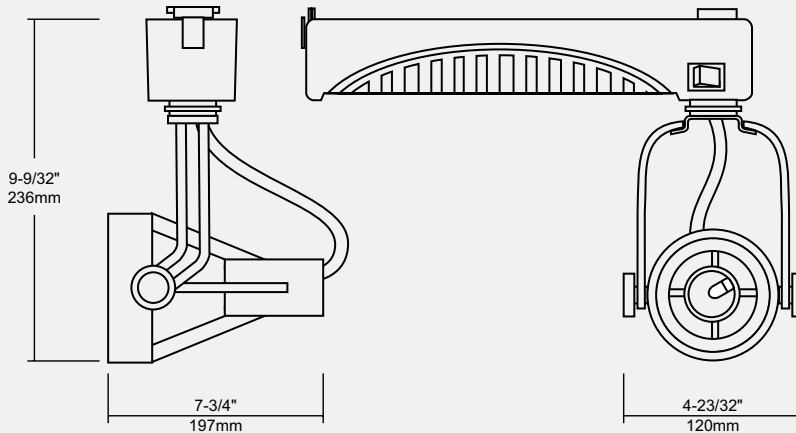


Compatible Lamps

- Metal Halide, PAR20, 39W max.

Icon Features

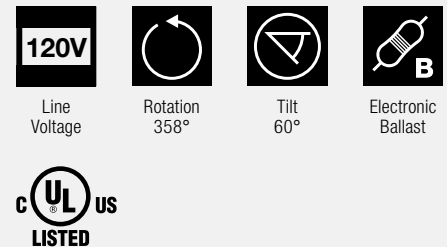

Ordering Guide

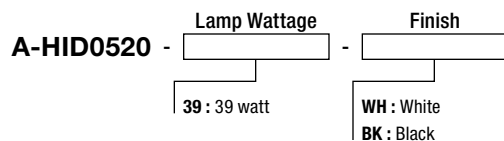

Example: A-HID0520-39-WH



A-HID0530

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Deep drawn housing construction for high strength and rigidity. Single piece cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 60° tilt.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket


Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based lamp metal halide lamps.

Lamping Options

Metal Halide
• PAR30 MH
* 70 watt


Track Accessories

See pages 342-363



The A-HID0530 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W metal halide lamp.


Dimensions

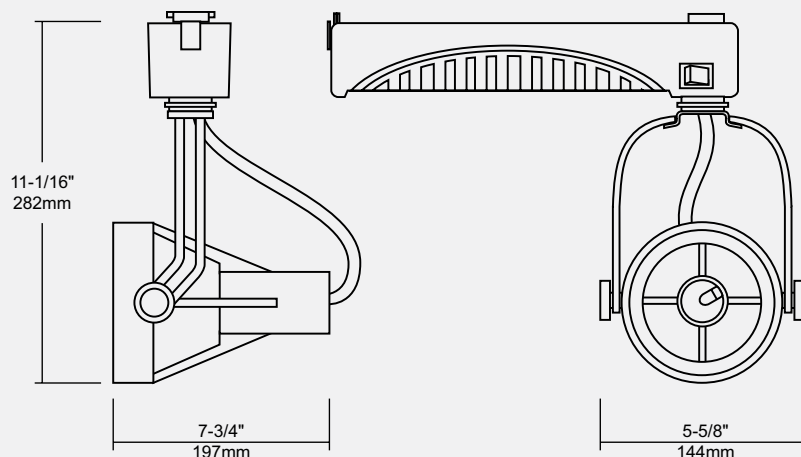


Compatible Lamps

Metal Halide, PAR30, 70W max.

Icon Features

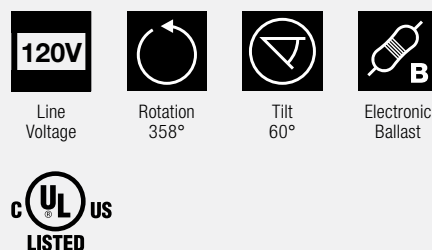

Ordering Guide

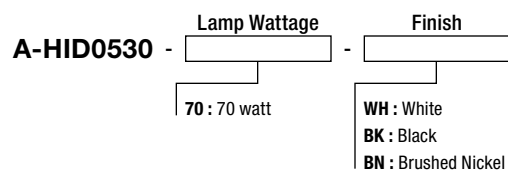

Example: A-HID0530-70-WH



The A-HID0538 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W metal halide lamp.

A-HID0538

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Deep drawn housing construction for high strength and rigidity. Single piece cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 60° tilt.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based lamp metal halide lamps.


Lamping Options

- Metal Halide
- PAR38 MH
- * 70 watt

Track Accessories

See pages 342-363

Dimensions

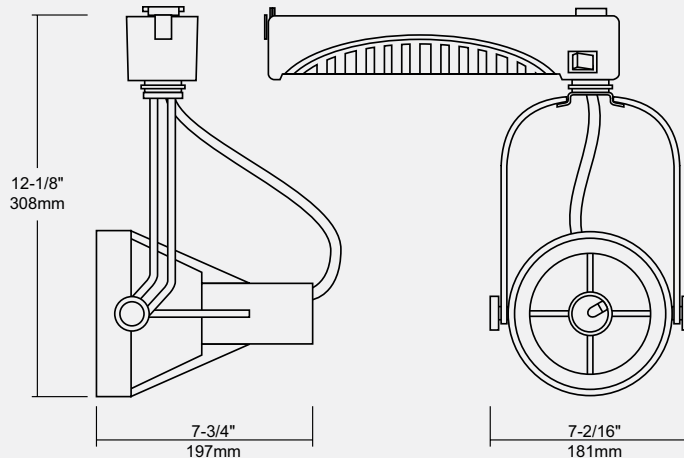

Compatible Lamps


- Metal Halide, PAR38, 70W max.

Icon Features

- Line Voltage
- Rotation 358°
- Tilt 60°
- Electronic Ballast



Ordering Guide

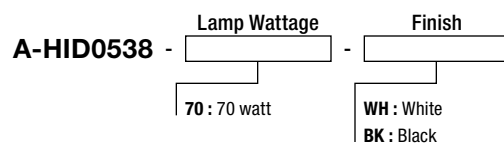

Example: A-HID0538-70-WH



The A-HID0630 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W metal halide lamp.

A-HID0630

Metal Halide Track Fixture

Features

Dual angle tightening knobs secure angle position. High strength stainless steel electrical contacts. Die cast aluminum housing for high strength and rigidity. Serrated sides for easy gripping. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 90° tilt.

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based metal halide lamps.

Lamping Options


Metal Halide

- PAR30 MH
- * 70 watt

Track Accessories

See pages 342-363


Dimensions

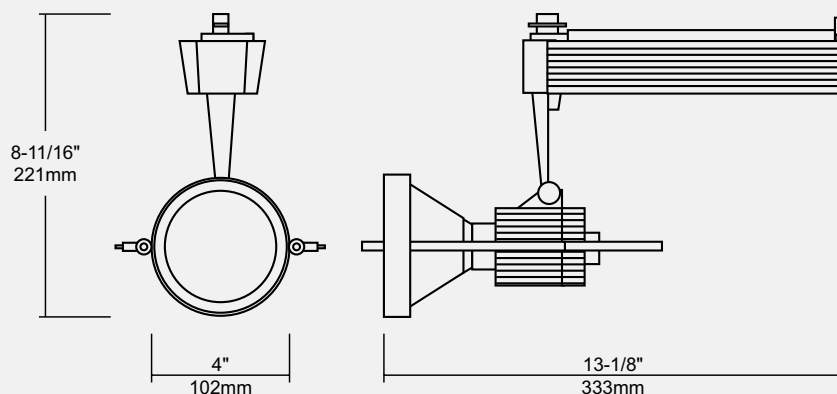


Compatible Lamps

Metal Halide, PAR30, 70W max.

Icon Features

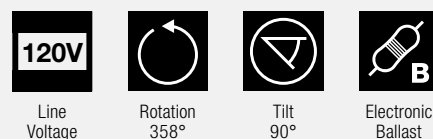

Ordering Guide



Example: A-HID0630-70-MS



The A-HID0638 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W metal halide lamp.

A-HID0638

Metal Halide Track Fixture

Features

Dual angle tightening knobs secure angle position. High strength stainless steel electrical contacts. Die cast aluminum housing for high strength and rigidity. Serrated sides for easy gripping. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 90° tilt.

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based metal halide lamps.


Lamping Options

- Metal Halide
- PAR38 MH
- * 70 watt

Track Accessories

See pages 342-363


Dimensions

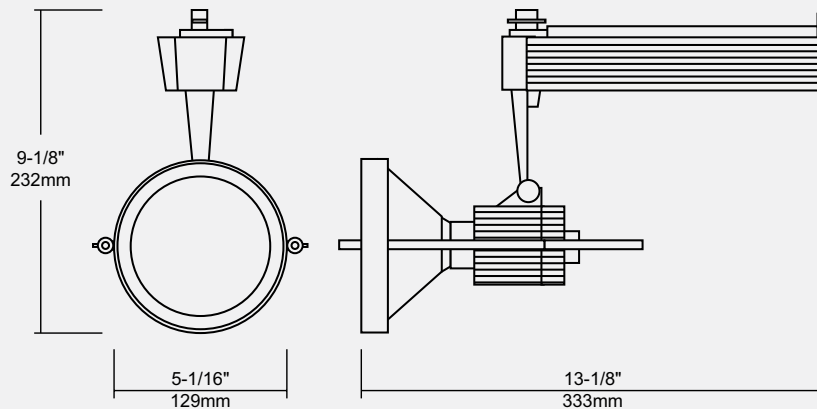


Compatible Lamps

Metal Halide, PAR38, 70W max.

Icon Features

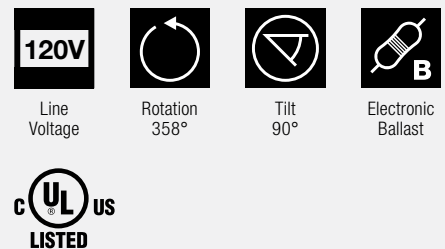

Ordering Guide



Example: A-HID0638-70-MS



The A-HID0730 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 70W metal halide lamp.

A-HID0730

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Die cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 90° tilt.

Mounting

The fixtures may be mounted to track or outlet boxes via the monopoint (ATKP109).

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based metal halide lamps.


Lamping Options

Metal Halide
• PAR30 MH
* 70 watt

Track Accessories

See pages 342-363


Dimensions

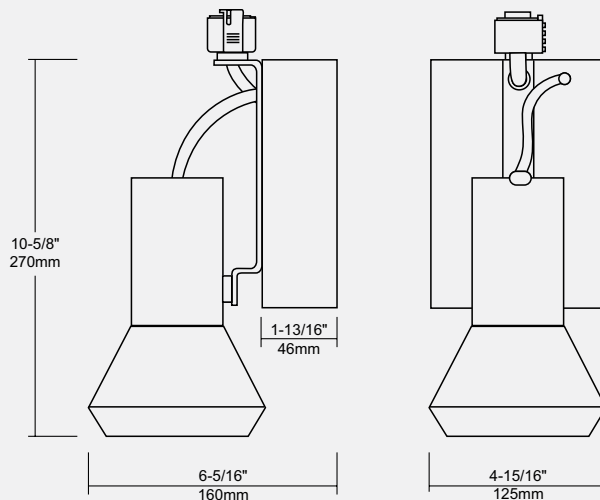


Compatible Lamps

Metal Halide, PAR30, 70W max.

Icon Features

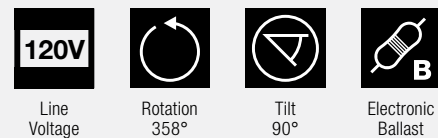

Ordering Guide



Example: A-HID0730-70-BK

Note: Reflectors sold separately.



The A-HID0830 is a metal halide track fixture with electronic ballast, without reflector. Utilizes 39W or 70W metal halide lamp.

A-HID0830

Metal Halide Track Fixture

Features

Simple, aesthetic, cylindrical design with heavy duty aiming bracket. Die cast aluminum with end caps welded in place and no exposed fasteners. Textured powder-coat paint finish.

Adjustability

The fixture provides custom aiming of 358° rotation and 90° tilt.

Electrical

Compact, lightweight electronic ballasts are utilized for quiet, efficient operation and quick re-strike properties. In addition, electronic ballasts feature end of lamp life shut-off and maintain colour without shifting. Lamp sockets are pulse-rated. Available in 39 and 70 watt, 120V, 60Hz model.

Socket

Porcelain-jacketed medium-base socket acts as a heat sink. It accommodates medium-based metal halide lamps.

Lamping Options


Metal Halide

- PAR30 MH
 - * 39 watt
 - * 70 watt

Track Accessories

See pages 342-363

Dimensions

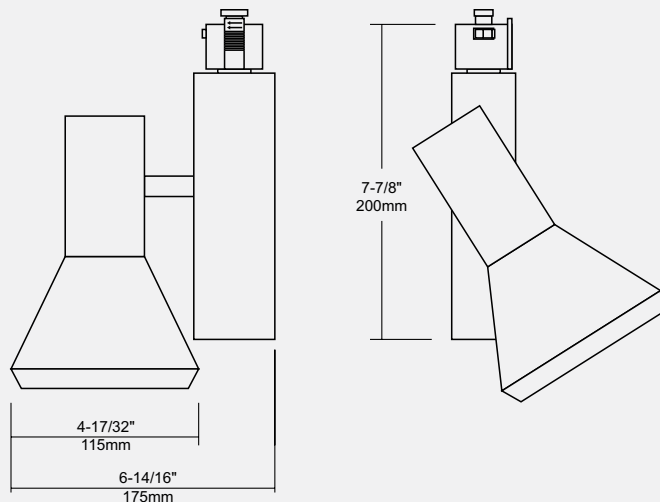

Compatible Lamps

Metal Halide, PAR30, 70W max.

Icon Features



Line
Voltage



Rotation
358°




Tilt
90°



Electronic
Ballast



Ordering Guide

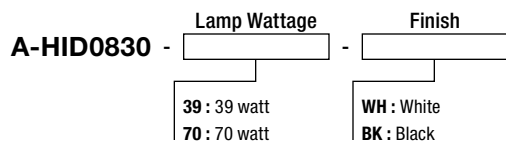

Example: A-HID0830-39-WH

Note: Reflectors sold separately.



The A-HID01030 is a track-mounted Metal Halide flat back cylinder with integral transformer. Comes with clear glass lens. Utilizes electronic metal halide ballast designed for use with higher colour rendering index T6 metal halide light sources. Engineered for use with T6 G12 MH, 39W and 70W lamps.

A-HID01030

Metal Halide Track Fixture

Features

Streamlined conical design for clean, finished appearance.
Deep drawn housing construction for high strength and rigidity. High-strength stainless steel electrical contacts.
Textured powder-coat paint finish.

Adjustability

"L" shaped gimbal can be adjusted into any position for optimal lighting performance and fixture appearance. The fixture provides custom aiming of 358° rotation and 90° tilt.

Electrical

Teflon-coated wire lead connect socket and housing to electrical contact head. Teflon coating is durable and resists heat degradation from lamp and housing. Compact, lightweight electronic ballasts are utilized for quiet, efficient operation. Available in 120/277V AC 50/60Hz operation.

Socket

G12 base ceramic socket acts as a heat sink. It accommodates T6 metal halide lamps.

Lamping Options


Metal Halide

- T6
- * 70 watt

Track Accessories

See pages 342-363


Dimensions

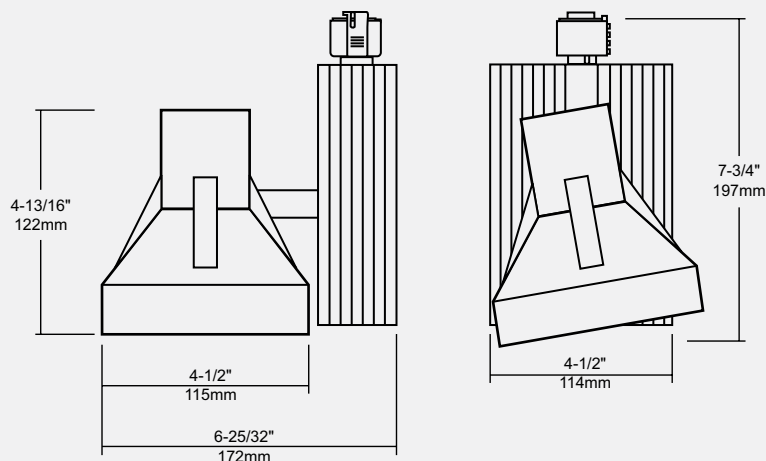


Compatible Lamps

Metal Halide, T6 G12, 70W max.

Icon Features



Ordering Guide

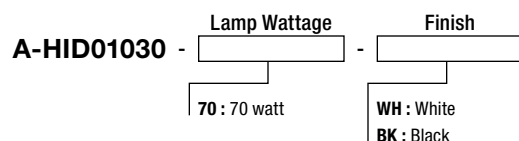

Example: A-HID01030-70-BK



ATK

2', 4', 6', 8' and 12' Tracks

Extrusion

Constructed of 0.06" extruded aluminum with 0.045" PVC bus bar support holding 12 gauge round bus bars. Debossed polarity line provided visibility and helps with alignment of track connectors/power feeds.

Electrical

Single circuit power distribution system designed to supply lighting unit flexibly. Single hot and neutral conductors are rated for max. 20 amps. 12g copper electrical conductors are concealed in thermo-plastic, low-profile track section.


Mounting

This track is surface mounted using the supplied mounting hardware.



The ATK is an extruded aluminum track with 20-amp rated solid integral conductors. Two end caps are included in a track. These tracks can be joined together using various styles of track connectors. Available in 2, 4, 6, 8 and 12 feet.

Dimensions

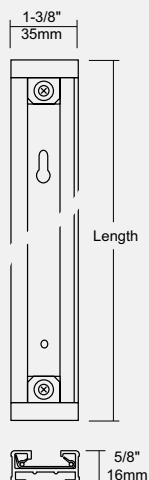

Part No.

Length (Excluding end caps)

Icon Features



ATK02	20-1/8" 511mm
ATK04	44-1/8" 1121mm
ATK06	68-1/8" 1730mm
ATK08	92-1/8" 2340mm
ATK12	140-1/8" 3559mm

Ordering Guide

ATK	Length	Finish
	02 : 2'	WH : White
	04 : 4'	BK : Black
	06 : 6'	BN : Brushed Nickel
	08 : 8'	
	12 : 12'	

Example: ATK04-WH



A-LEC6270

Wire Raceway Cover

Features

Low-profile aesthetic design. Conceals the power feed wires from one end up to 10" long.


Track Function

Use as accessory for tracks.



The A-LEC6270 is a wire raceway cover for use with live end and down rods.

Dimensions

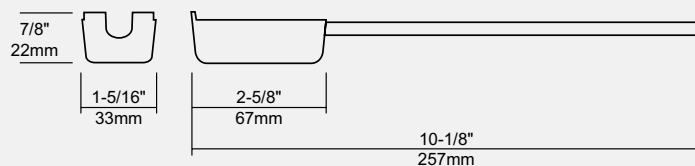

Icon Features



Ordering Guide

A-LEC6270 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: A-LEC6270-BN



ATKC01

I-Connector

Features

Low-profile aesthetic design with solid 12 gauge conductors.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as connector for tracks.



The ATKC01 is an I-Connector, which connects two track sections end to end for an in-line configuration (180°).

Dimensions

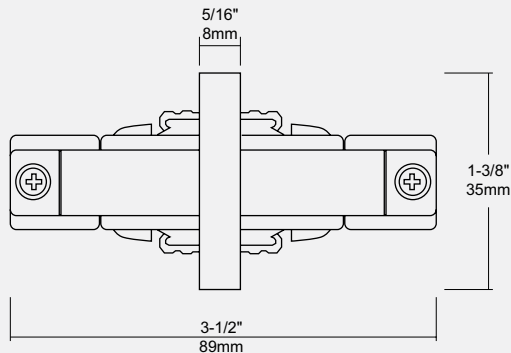

Icon Features



Ordering Guide

ATKC01 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKC01-BN



ATKC05

Flexible Connector

Features


Low-profile aesthetic design with solid 12 gauge conductors.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as angle or straight connector for tracks.



The ATKC05 is a flexible connector, which connects two tracks at any angle up to 180° or wall to ceiling or pitched ceiling application.

Dimensions

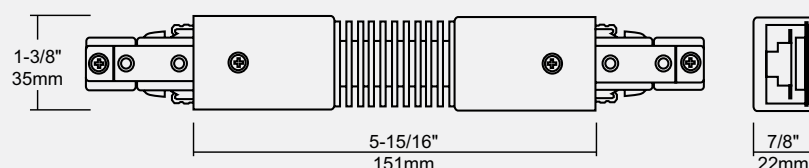

Icon Features



Ordering Guide

ATKC05 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKC05-BK



ATKP02

L-Connector

Features

Low-profile aesthetic design with solid 12 gauge conductors, converts L to I-connector or vice versa.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as angle connector for tracks and power feed as well.



The ATKP02 is an L-Connector, which connects two track sections at 90°. Convertible to I-Connector with included cover.

Dimensions

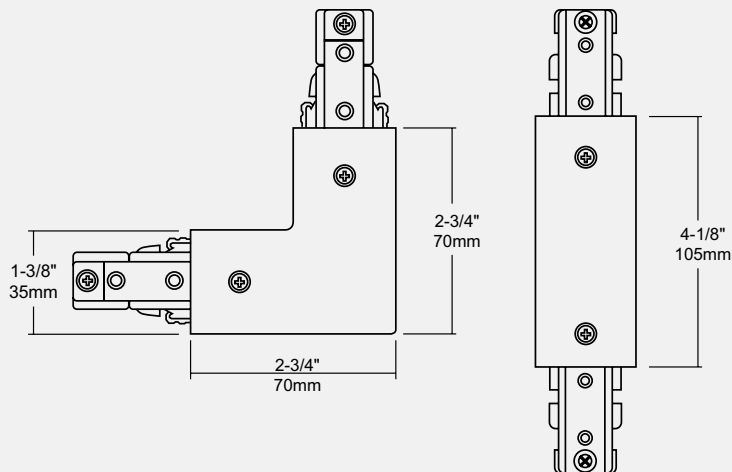

Icon Features



Ordering Guide

ATKP02 - Finish
WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP02-BN



ATKP03

T-Connector

Features

Low-profile aesthetic design with solid 12 gauge conductors.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as connector/power feed for tracks.



The ATKP03 is a T-Connector, which connects three track sections at 90° in a "T" configuration. Also can be used as a power feed.

Dimensions

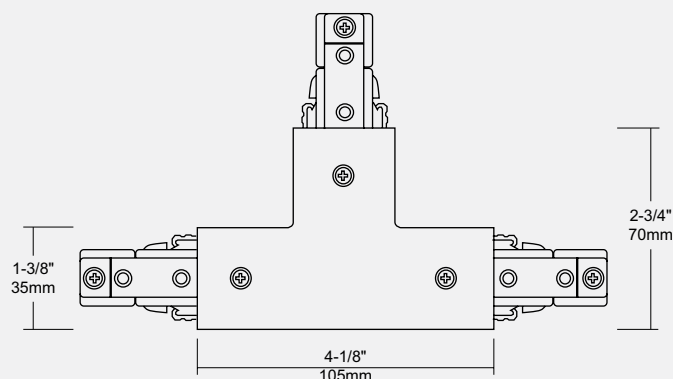

Icon Features



Ordering Guide

ATKP03 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP03-WH



ATKP06

Live End Conduit Feed

Features

Low-profile aesthetic design with solid 12 gauge conductors.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as power feed/connector for tracks.



The ATKP06 is a live-end conduit feed (7/8" knockout) for top or end feed.

Dimensions

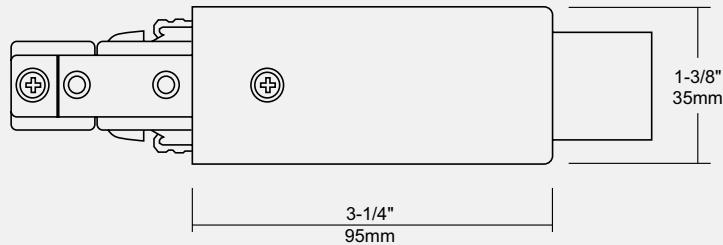

Icon Features



Ordering Guide

ATKP06 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP06-WH



ATKP08

Centre Feed

Features

Low-profile aesthetic design with solid 12 gauge conductors.
Mounting hardware included.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as power feed for tracks.



The ATKP08 is a centre feed, which provides power anywhere along the track from junction box. It includes a canopy cover.

Dimensions

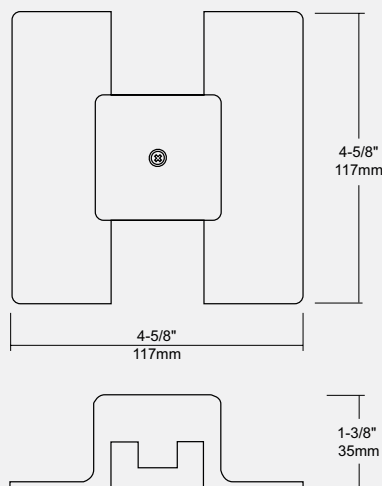

Icon Features



Ordering Guide

ATKP08 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP08-BK



ATKP09

Live End

Features

Low-profile aesthetic design with solid 12 gauge conductors.
Mounting hardware included.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as power feed/connector for tracks.



The ATKP09 is a live-end, which provides power from end of track (no canopy).

Dimensions

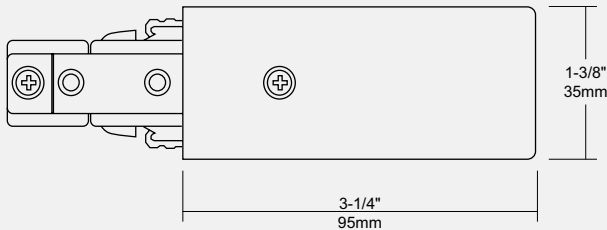

Icon Features



Ordering Guide

ATKP09 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP09-WH



ATKP10

Wired End

Features

Low-profile aesthetic design with grounded solid 12 gauge conductors. Comes with a 15-ft. power cord.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.
Power cord: #18AWGX2C, 105°C.


Track Function

Use as power feed/connector for tracks.



The ATKP10 is a wired-end, which provides power to the end of a track from a receptacle.

Dimensions

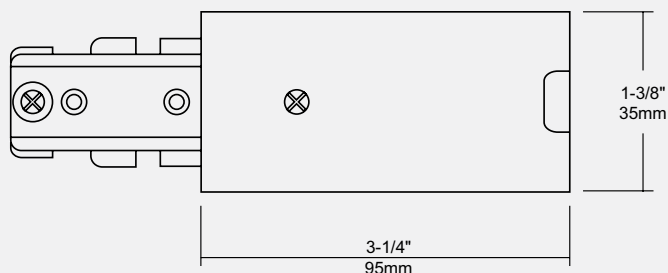

Icon Features



Ordering Guide

ATKP10 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP10-WH



ATKP11

Live End with Canopy

Features


Low-profile aesthetic design with solid 12 gauge conductors.
Mounting hardware and canopy cover included.

Electrical

System Electrical Rating: 20A, 120V, 60Hz.


Track Function

Use as power feed/connector for tracks.



The ATPK11 is a live-end with canopy, which provides power to end of track from junction box.

Dimensions

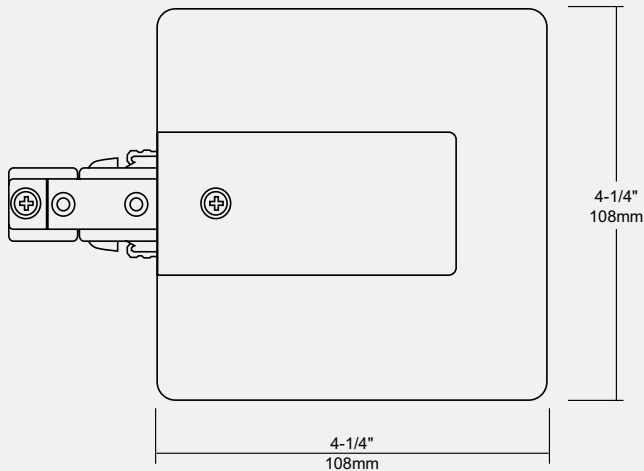

Icon Features



Ordering Guide

ATKP11 - Finish
WH : White
BK : Black
BN : Brushed Nickel

Example: ATPK11-BK



ATKP109


Monopoint

Features

Low-profile aesthetic design. Allows the installation of one track head without a track. Mounts permanently to octagon box. Mounting hardware included.


Track Function

Use as power feed for track heads.



The ATKP109 is a monopoint, which provides power to single spot light from octagon box.

Dimensions

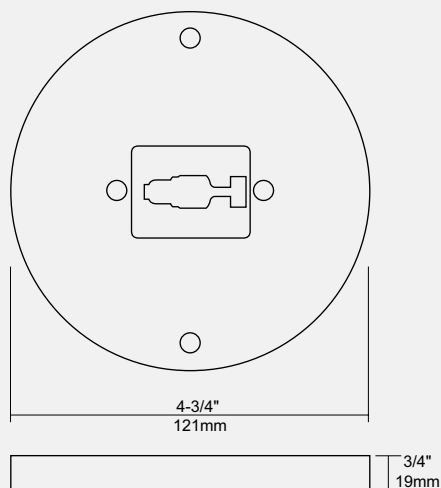

Icon Features



Ordering Guide

ATKP109 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKP109-WH



ATKA113

Canopy Cover

Features

Low-profile aesthetic design. Sturdy aluminum construction.
Screws included.

Track Function

Use as accessory for tracks.




WH



BK

The ATKA113 is an aluminum canopy cover for use with ATP02 or ATP03 (power feed connectors) for outlet box electrical feed.

Dimensions

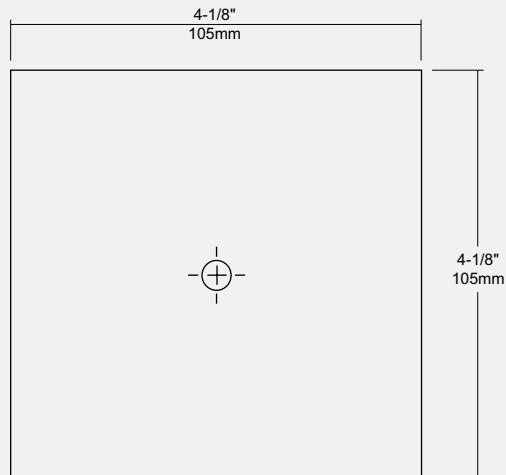

Icon Features



Ordering Guide

ATKA113 - Finish
WH : White
BK : Black

Example: ATKA113-BK



ATKA250S

Sloped Ceiling Canopy

Features

Low-profile aesthetic design. For use with the installation of down-rods. Mounts permanently to octagon box. Mounting hardware included.


Track Function

Use as accessory for tracks.



The ATK A250S is a 4-3/4" sloped ceiling canopy kit. For use with track down-rods. Includes sloped ceiling adapter, track mounting brackets, cover and mounting hardware. Circular design, made of zinc-coated steel plate.

Dimensions

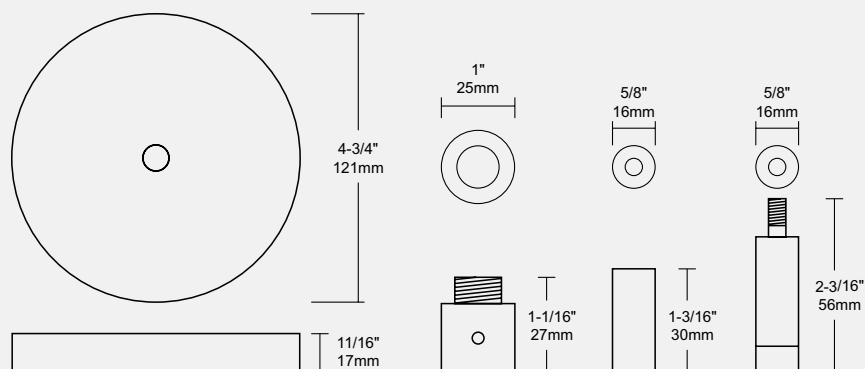

Ordering Guide

ATKA250S - Finish
WH : White
BK : Black

Example: ATK A250S-BK



A-T56

Mounting Adapter

Compatibility


Attaches a 3/8" diameter hollow rod to ATK track.

Track Function


Use as accessory for tracks.

The A-T56 is a mounting adapter, threaded to lock in place.
Also use for 3/8" threaded rod.

Dimensions

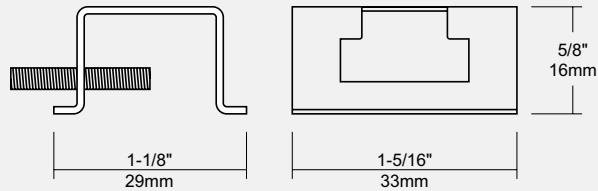

How to use mounting adapter.

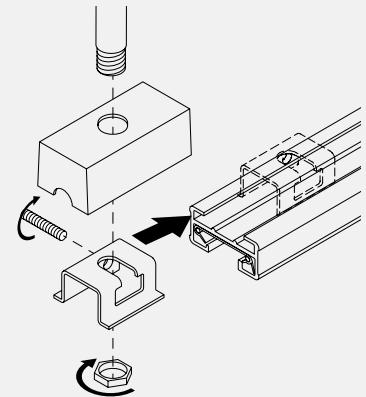



ATKA320

Track Hook

Features


Low-profile aesthetic design.

Track Function

Use as accessory for tracks.


Track Options

See page 342



The ATKA320 is a non-electric suspension utility track hook, which supports a maximum of 25 lbs. Can be used for chain hung fixtures, retail signs, etc.

Dimensions

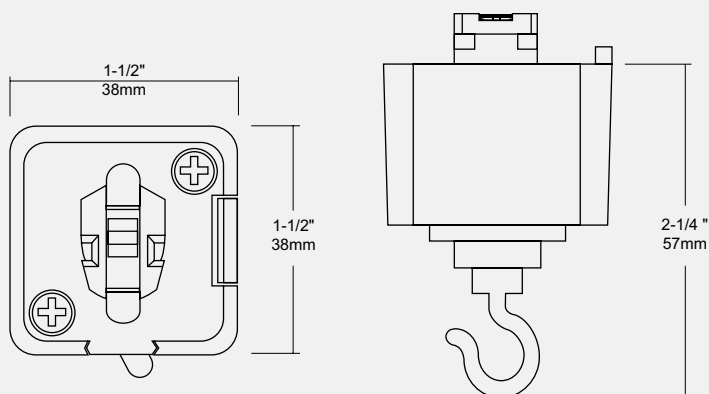

Ordering Guide

ATKA320 -	Finish
	WH : White
	BK : Black
	BN : Brushed Nickel

Example: ATKA320-WH



ATKA321

Track Receptacle

Features


Low-profile aesthetic design. For use as power outlet on track.
Convenient outlet application at any point on the track.

Track Function

Use as accessory for tracks.


Track Options

See page 342



The ATKA321 is a grounded track receptacle, 20 amps - 120V. It provides a power outlet from the track with an on/off switch.

Dimensions

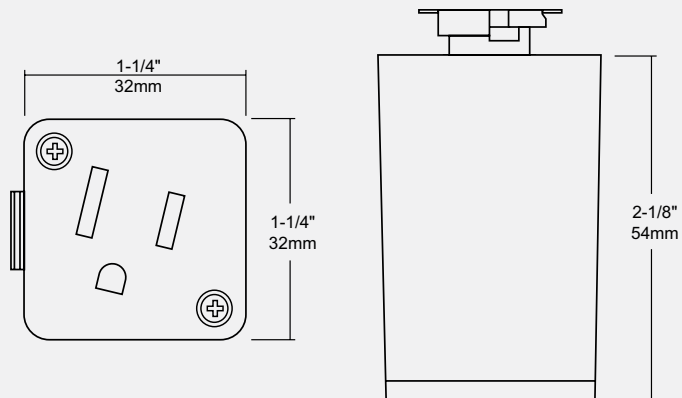

Ordering Guide

ATKA321 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: ATKA321-WH



A-TDR62

Stem Rod Kit with Hollow Rod

Profile


Hollow stem rod with threaded ends.

Compatibility

Can be used with extension rods to further extend track from ceiling.


Track Function

Use as accessory for tracks.



The A-TDR62 includes ceiling canopy, mounting brackets and hardware. Wiring from power feed goes through stem rod and connects to the electric box and is covered with canopy. For use to suspend track from ceiling.

Dimensions

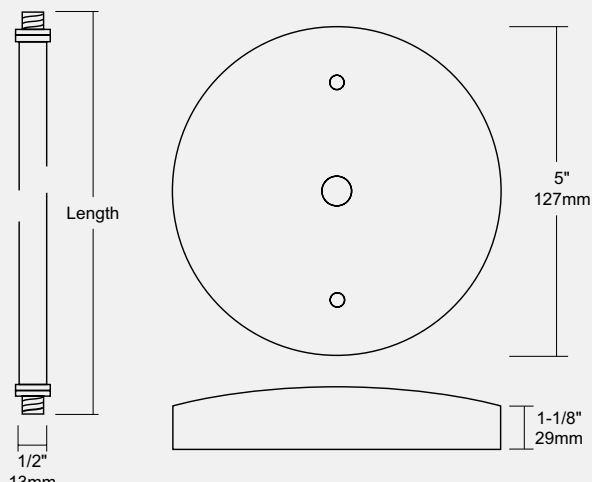

Icon Features



Ordering Guide

A-TDR62	Length	Finish
	12 : 12"	WH : White
	18 : 18"	BK : Black
	24 : 24"	BN : Brushed Nickel
	30 : 30"	
	36 : 36"	
	48 : 48"	

Example: A-TDR6218-WH



RODF62

Hollow Stem Suspension Rod

Profile

Hollow rod with threading on male/female ends. High tensile construction to allow tube to carry loads of lighting fixture.


Track Function

Use as accessory for tracks.



The RODF62 is a hollow stem rod used to extend track fixture yoke from track connector.

Dimensions



Ordering Guide

RODF62	Length	Finish
	12 : 12"	WH : White
	18 : 18"	BK : Black
	24 : 24"	BN : Brushed Nickel
	36 : 36"	
	48 : 48"	

Example: RODF6248-BK



RODR62


Hollow Stem Rod with Nuts

Features

Low-profile aesthetic design. Strain relief required.

Track Function

Use as accessory for tracks.



The RODR62 is a hollow Stem used to extend track from ceiling when used in conjunction with A-TDR62 kits. Will require a CN8450 coupling nut to join both together.

Dimensions



Ordering Guide

RODR62	Length	Finish
	12 : 12"	WH : White
	18 : 18"	BK : Black
	24 : 24"	BN : Brushed Nickel
	30 : 30"	
	36 : 36"	
	48 : 48"	

Example: RODR6212-WH



CN8450

Dual Thread Hollow Coupling

Profile

3/4" × 1" dual threaded hollow coupling.

Compatibility

Used to join two hollow stem rods for custom lengths.


Track Function

Use as accessory for tracks.



The CN8450 is a dual thread hollow coupling with smoothed edges, used to join two hollow stem rods together.

Dimensions

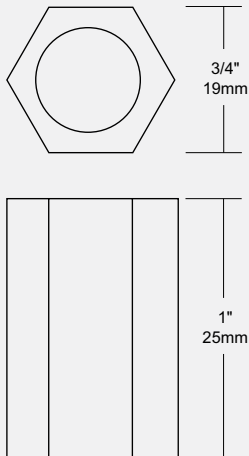

Ordering Guide

CN8450 - Finish

WH : White
BK : Black
BN : Brushed Nickel

Example: CN8450-WH



ATKXW

Hollow Stem Suspension Rod

Compatibility

Line voltage (120V) track heads.

Height Specifications

Available in various lengths to meet any installation requirement. Available in 12", 18", 24", 36" and 48".

Power Control

Rod includes an on/off switch on upper connector, for individual power control.

Track Function

Use as accessory for tracks.


Track Options

See page 344



The ATKXW is a suspension rod system to make it possible to illuminate track heads at different heights, from the track.

Dimensions

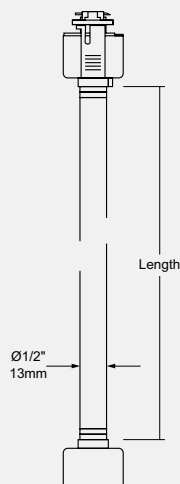

Icon Features



Linkable

Ordering Guide

ATKXW	Rod Length	- Finish
	12 : 12" 18 : 18" 24 : 24" 36 : 36" 48 : 48"	
		WH : White BK : Black

Example: ATKXW12-WH

Product No.	Page	Product No.	Page	Product No.	Page	Product No.	Page
A		A8502	196	A-HID0301	333	AT16P-A	104
A3001S	22	A8506	197	A-HID0520	334	AT17-A	106
A3002S	23	A8551-120	72	A-HID0530	335	AT17P-A	107
A3016	256	A8552-120	73	A-HID0538	336	AT20B	175
A4001S	31	A8556-120	74	A-HID0630	337	AT24B	54
A4002S	32	A8601	215	A-HID0638	338	AT24C	54
A4016	262	A8602	216	A-HID0730	339	AT25B	56
A4101	91	A8606	217	A-HID0830	340	AT25C	56
A4102	92	A8801	249	A-HID01030	341	AT26B	174
A4105	93	A8806	250	A-LEC6270	343	AT26C	174
A4301	122	A8901	251	AML-NT	269	AT28	57
A4302	123	A8906	252	AM-MF	271	AT29B	56
A4306	124	A8916	253	AM-MFRWLNS	274	AT29C	57
A4501	179	A10301	142	AM-MHXLVR	274	AT29R	175
A4502	180	A10302	143	AM-MSNT	274	AT30B	151
A4502C	181	A10306	144	AM-MT	270	AT30B-H	211
A4506	182	A10401	168	AM-MUVLNS	274	AT30LB	155
A4551-120	59	A10406	169	AM-MXLVR	274	AT31	153
A4552-120	60	A10501	202	A-MN1270	291	AT31F-H	214
A4556-120	61	A10502	203	AM-NF	268	AT31-H	213
A4706	228	A10506	204	AM-NFRWLNS	274	AT31L	155
A5101	97	A10551-120	79	AM-NHXLVR	274	AT34P	57
A5102	98	A10552-120	80	AM-NLNLNS	274	AT36B	152
A5801	234	A10556-120	81	AM-NSNT	274	AT36B-H	212
A5806	235	A10601	222	AM-NT	267	AT36C	152
A5826	239	A10602	223	AM-NUVLNS	274	AT36C-H	212
A5901	236	A10606	224	AM-NXLVR	274	AT36LB	156
A5906	237	A-AA1010	303	A-MU1481	308	AT36LC	156
A5916	238	A-AO1012	289, 304	AM-WF	273	AT38	153
A6101	102	A-BA0118	323	AM-WFRWLNS	274	AT38-H	213
A6102	103	A-BA0127	325	AM-WHXLVR	274	AT38L	157
A6111	109	A-BA0136	327	AM-WLNLNS	274	AT38LS	157
A6201	113	A-BA0140	329	AM-WT	272	AT38S	153
A6201S	114	A-BA0218	324	AM-WXLVR	274	AT38S-H	213
A6202	115	A-BA0227	326	A-NA1204	309	AT39LR	154
A6205	116	A-BA0236	328	A-OR1013	292, 310	AT39R	151
A6301	128	A-BA0240	330	A-PAR220/20	295	AT39RF	151
A6302	129	A-CL1370	290	A-PAR221/30	296	AT39RF-H	211
A6306	130	ACYC6300	279	A-PAR222/38	297	AT39R-H	211
A6401	148	ACYC6500	281	A-PAR320/20	298	AT42B	120
A6402	149	ACYC6550	277	A-PAR321/30	299	AT42C	120
A6406	150	ACYC8300	280	A-PAR322/38	300	AT49B	121
A6501	188	ACYC8500	282	A-PAR422/38	301	A-T56	356
A6502	189	ACYC8550	278	A-Q01015	311	AT56-A	101
A6506	190	ACYP6300	279	AS3516	260	AT57-A-AL	99
A6551-120	65	ACYP6500	281	A-S02012	293, 312	AT57-A-CT	99
A6552-120	66	ACYP6550	277	AT3X01B	28	AT57-A-DO	101
A6556-120	67	ACYP8300	280	AT3X18R	28	AT57-A-FR	101
A6601	208	ACYP8500	282	AT3XA02	28	AT59R-A	99
A6602	209	ACYP8550	278	AT3XA02S	29	AT61	120
A6606	210	ACYW6300	279	AT3XA18	29	AT69R	117
A6706	231	ACYW6500	281	AT3XA18S	29	AT69RF	117
A6801	242	ACYW6550	277	AT4A02	43	AT69RT	117
A6806	243	ACYW8300	280	AT4A02S	43	AT80B	161
A6901	244	ACYW8500	282	AT4A18	44	AT80B-H	218
A6906	245	ACYW8550	278	AT4A18S	44	AT80LB	165
A6916	246	A-DN1161	305	AT5	118	AT81	164
A7406S	173	A-ER1150	306	AT5P	118	AT81F-H	221
A8301	135	A-FP1248	315	AT6	118	AT81-H	220
A8302	136	A-FT03124HO	318	AT6P	119	AT84E	55
A8306	137	A-FT03154HO	320	AT7	119	AT86B	162
A8401	158	A-FT03224HO	319	AT7P	119	AT86B-H	219
A8402	159	A-FT03254HO	321	AT11-A	105	AT86C	162
A8406	160	A-FT04254HO	322	AT15-A	106	AT86C-H	219
A8406S	176	A-GI1019	307	AT15P-A	106	AT86LB	166
A8501	195	A-HID0300	332	AT16-A	104	AT86LC	166

Product No.	Page	Product No.	Page	Product No.	Page	Product No.	Page
AT87	163	AT214B	95	AT825BG	255	C	
AT87L	167	AT215	54	AT825R	254	CN8450	362
AT88	163	AT216	55	AT825RG	254	G	
AT88-H	220	AT217	55	AT840B	177	GR-TH04	187
AT88L	165	AT219R	94	AT846	178	GR-TH12	45
AT88LS	165	AT225B	95	AT849R	178	GR-TH18R	40, 186
AT88S	163	AT225C-A	96	AT850R	177	GR-TH18R3	40
AT88S-H	220	AT246B	230	AT855B	255	GR-TH19	186
AT89LR	164	AT248	229	AT855R	254	GR-TH313	43
AT89R	161	AT249R	229	AT859LR	167	H	
AT89RF	161	AT249RF	229	AT859R	164	HV3-TH01	20
AT89RF-H	218	AT252-AJ	261	AT1054-A	108	HV3-TH02	20
AT89R-H	218	AT252-ST	261	AT1100B	82, 145, 205	HV3-TH18	20
AT90B	170	AT255B-A	100	AT1109R	82, 145, 205	HV4-TH4013	45
AT90B-H	225	AT255C-A	100	AT1109RF	82, 145, 205	HV4-TH4014	46, 58
AT96B	171	AT256-SH	261	AT1154-A	112	HV4-TH4018	186
AT96B-H	226	AT266B	233	AT1209	96	HV4-TH4019	46
AT96C	171	AT268	232	AT1215	94	P	
AT96C-H	226	AT269R	232	AT1216	96	P-3000	16, 18
AT98	172	AT269RF	232	AT1217	94	P-4000	35, 52
AT98-H	227	AT309P-AJ	257	AT1218	95	P-4010	35, 52
AT98S	172	AT315	24	AT1654C	134	R	
AT98S-H	227	AT316	25	AT1659R	71, 134, 194	RF302GC	18
AT99R	170	AT317	25	AT1859R	78, 141, 201	RF302LC	16
AT99RF	170	AT318	25	AT1916B-A	107	RF305	19
AT99RF-H	225	AT319	26	AT1916C-A	105	RF305L	17
AT99R-H	225	AT324B	24	AT1917-A	105	RF401	50
AT102-A-SP	107	AT324C	24	AT3253-RG-AJ	259	RF401A	47
AT102F-A-SP	108	AT324RG-ST	257	AT3341-ST	258	RF401L	33
AT106R-A	110	AT324R-ST	257	AT4252R-AJ	263	RF401L-75	34
AT106RF-A	110	AT325-RG-AJ	259	A-TDR62	359	RF401LED-01-10	85
AT109R-A	104	AT328	27	ATF1010	302	RF402	51
AT115-A	100	AT329	27	ATF3011	316	RF402A	48
AT140B	62, 125, 183	AT334-AJ	258	ATF5001	331	RF402C	52
AT141	64, 127, 185	AT335B	26	ATF7001-1030	317	RF402L-75	36
AT146B	63, 126, 184	AT335C	26	ATH24B	38	RF402LC	35
AT146C	63, 126, 184	AT337-ST	258	ATH24C	38	RF402LED-01-10	86
AT148	64, 127, 185	AT347B	27	ATH25B	40	RF405	53
AT148S	64, 127, 185	AT352	30	ATH25C	41	RF405A	49
AT149R	62, 125, 183	AT352S	30	ATH28	42	RF405L	37
AT149RF	62, 125, 183	AT354C	154	ATH29	41	RF601LED-02-15	88
AT160B	68, 131, 191	AT354LC	155	ATH34P	42	RF602LED-02-15	89
AT161	70, 133, 193	AT402	44	ATH35B	41	RODF62	360
AT163-A	111	AT402P	58	ATH43	38	RODR62	361
AT164B-A	111	AT402PS	58	ATH47	39	RTM3X15S	30
AT165B-A	110	AT402S	45	ATH48E	39	RTM3012S	21
AT165C-A	111	AT424R-ST	264	ATH84E	39	RTML-14R	90
AT166B	69, 132, 192	AT425R-AJ	263	ATH452	42	RTML-224R	87
AT166C	69, 132, 192	AT434P-AJ	263	ATK	342	V	
AT168	70, 133, 193	AT525B	241	ATKA113	354	VBE-1	17, 19, 37, 49, 53
AT168S	70, 133, 193	AT525BG	241	ATKA250S	355		
AT169R	68, 131, 191	AT525R	240	ATKA320	357		
AT169RF	68, 131, 191	AT525RG	240	ATKA321	358		
AT180B	75, 138, 198	AT550B	241	ATKC01	344		
AT181	77, 140, 200	AT550R	240	ATKC05	345		
AT186B	76, 139, 199	AT625B	248	ATKP02	346		
AT186C	76, 139, 199	AT625BG	248	ATKP03	347		
AT187	78, 201	AT625R	247	ATKP06	348		
AT188	77, 140, 200	AT625RG	247	ATKP08	349		
AT188S	77, 140, 200	AT639LR	157	ATKP09	350		
AT189R	75, 138, 198	AT639R	154	ATKP10	351		
AT189RF	75, 138, 198	AT654	121	ATKP11	352		
AT196B	83, 146, 206	AT655B	248	ATKP109	353		
AT196C	83, 146, 206	AT655R	247	ATKXW	363		
AT198	84, 147, 207	AT693R	121	A-VS1040	294, 313		
AT198S	84, 147, 207	AT825B	255	A-XE1130	314		



GOLD LABEL WARRANTY

Liteline Corporation provides a lifetime warranty for our gold label transformers and warrants that the transformer will not fail for the product's lifecycle. Should this product, in Liteline Corporation's opinion, fail to operate a 12 volt halogen lamp during the warranty period, Liteline Corporation will, at its option, repair or replace the transformer only at no charge, provided that the product has not been subjected to abuse, misuse, accident, disaster or non-Liteline Corporation authorized modification or repair.

You may obtain warranty service by delivering this transformer to Liteline Corporation. Product returned to Liteline Corporation must be pre-authorized by Liteline Corporation with an RMA (Return Material Authorization) number marked on the outside of the package and sent prepaid, insured and packaged for safe shipment. Liteline Corporation will return this product by prepaid ground shipment service.

The Liteline Corporation lifetime warranty is defined as the serviceable life of the product. This is defined as the period during which all components are available. Should the product prove to be irreparable, Liteline Corporation reserved the right to substitute an equivalent product if available or to retract lifetime warranty if no replacement is available.

The above warranty is the only warranty authorized by Liteline Corporation.

The above warranty applies to gold label transformers sold on or after January 1, 2010.

Note: Under no circumstances will Liteline Corporation be liable in any way for damages, including any lost profits, lost savings or other incidental or consequential damages arising out of the use of, or inability to use, such product.



LED 3 YEAR WARRANTY

Liteline Corporation extends a 3 Year Limited Warranty on LED products to the original purchaser that the warranted products are free from defects in workmanship and/or materials only.

The warranty period commences on the date of shipment from Liteline Corporation. Liteline Corporation, at its sole option, will repair or replace, F.O.B. our factory, freight prepaid, any Liteline Corporation product defective in workmanship or materials.

The warranty is only valid when products are operated at the rated voltage and if operated under normal use and conditions; and which have not been altered or repaired. Use of the warranted products in combination with products, components or parts not manufactured by or not approved by Liteline in writing will void the limited warranty.

Under no circumstances will Liteline Corporation be liable in any way for damages, including any lost savings or other incidental or consequential damages arising out of the use of, or inability to use, such product.

You may obtain warranty service by delivering the inoperable unit to Liteline Corporation. Product returned to Liteline Corporation must be pre-authorized by Liteline Corporation with an RMA (Return Material Authorization) number marked on the outside of the package and sent prepaid, insured and packaged for safe shipment. Liteline Corporation will return this product by prepaid ground shipment service.

Warranties are not transferable and apply only to the original owner of the Liteline Corporation product.



LITELINE CORPORATION
info@liteline.com
www.liteline.com

8 Abacus Road
Brampton, Ontario
Canada L6T 5B7

PHONE | TÉLÉPHONE
416-996-1856
1-866-730-7704

FAX | TÉLÉCOPIEUR
905-794-1990
1-888-738-9736

REV12/03.26.13
M-ACATE13





Liteline Corporation

1-866-730-7704

A-Linelighting.com