

FEATURES & SPECIFICATIONS

INTENDED USE — The BLT Best-in-Value Low Profile LED luminaire features a popular center basket design that offers a clean, versatile style and volumetric distribution. High efficacy LED light engines deliver energy savings and low maintenance compared to traditional sources. An extensive selection of configurations and options make the BLT the perfect choice for many lighting applications including schools, offices and other commercial spaces, retail, hospitals and healthcare facilities. The low profile BLT design (3-1/4") also makes it an excellent choice for renovation projects.

BLT Tunable White is perfect in classrooms and educational settings as it allows the light color temperature to be adjusted to the optimal light level for student tasks such as reading or test taking.

CONSTRUCTION — BLT enclosure components are die-formed for dimensional consistency and painted after fabrication with a polyester powder paint for improved performance and protection.

The reflector is finished with a high reflective matte white powder paint for improved aesthetics and increased light diffusion.

End plates contain easy-to-position integral T-bar clips for securely attaching the luminaire to the T-grid. For additional T-grid security, optional screw on T-bar clips are available.

Diffusers are extruded from impact modified acrylic for increased durability. Injection molded diffuser light traps add a finished look to the diffuser ends and help seal the diffuser to the housing end plates. Optional diffuser trim rings provide an attractive mounting for integral sensors as well as adding a decorative element to the luminaire aesthetics.

LED boards are accessible from below; driver is accessible from the plenum.

OPTICS — Volumetric illumination is achieved by creating an optimal mix of light to walls, partitions and vertical and horizontal work surfaces — rendering the interior space, objects and occupants in a more balanced, complimentary luminous environment. High performance extruded acrylic diffusers conceal LEDs and efficiently deliver light in a volumetric distribution. Four diffuser choices available - curved and square designs with linear prisms or a smooth frosted finish.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 80% LED lumen maintenance at 60,000 hours (L80/60,000).

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Integrated nLight® controls make each luminaire addressable — allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices and the BLT luminaires using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission.

Driver disconnect provided where required to comply with US and Canadian codes.

Mainstream Dynamic Tunable White with nTune Technology: Tunable white nTune™ is an all digital light color temperature control within an nLight enabled luminaire. This brings tunable white lighting control into the mainstream with repeatable, consistent results in an economical luminaire form and system already familiar to schools. Designers and facility operators are granted the freedom to tie scenes to specific activities or to complement colors or materials within a visual environment. nTune™ allows color temperature settings through the Productivity Range of 3000K-5000K. Refer to the Programming User's Guide for instructions on customizing to your application with SensorView™.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software. See page 2 for the nLight sensor options.

INSTALLATION — The BLT's low profile design of only 3-1/4" provides increased installation flexibility especially in restrictive plenum applications. The BLT fits into standard 15/16" and narrow 9/16" T-grid ceiling systems.

Suitable for damp location.

For recessed mounting in hard ceiling applications, Drywall Grid Adapters (DGA) are available as an accessory. See Accessories section.

LISTINGS — CSA Certified to meet U.S. and Canadian standards. IC rated.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type


BLT Series LED

BLT Tunable White



Tunable White GPHD

- **Gamut:** One dimensional Warm-Cool
- **Path:** Direct 3000K to 5000K (Productivity Range)
- **Handle:** Two Natural Language Handles: Intensity and CCT
- **Data:** nLight with nTune technology for both handles of control

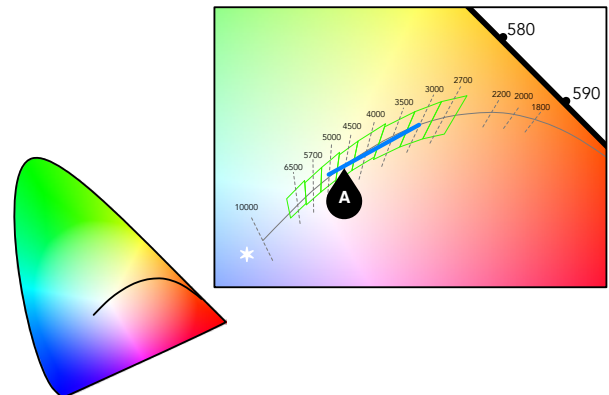

A Productivity Range 3000K to 5000K

CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

BLT Tunable White Volumetric Recessed Lighting 1'x4'



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: BLT4 TUWH PROR 30L ADP NLT

BLT4						
Series	Dynamic feature	Dynamic range	Lumens ¹	Diffuser	Voltage	Control interface type
BLT4 1x4 BLT	TUWH Tunable white	PROR Productivity range (3000-5000K)	20L 2000 30L 3000 40L 4000 48L 4800 60L 6000	ADP Curved, linear prisms ADSM Curved, smooth SDP Square, linear prisms SDSM Square, smooth Diffusers w/ trim rings ADPT Curved, linear prisms ADSMT Curved, smooth SDPT Square, linear prisms SDSMT Square, smooth	(blank) MVOLT 120 120 277 277 347 347 ²	NLT nLight nTune interface ³

Occupancy control ⁴	Options
(blank) No sensor control nLight Wired Networking NES7 nLight™ nES 7 PIR integral occupancy sensor NESPDT7 nLight™ nES PDT 7 dual technology integral occupancy control NES7ADCX nLight™ nES 7 ADCX PIR integral occupancy sensor with automatic dimming photocell NESPDT7ADCX nLight™ nES PDT 7 dual technology integral occupancy sensor with automatic dimming photocell	EL7L 700 lumen battery pack ⁵ EL14L 1400 lumen battery pack ⁵ BGTD Bodine Generator Transfer Device ⁶ PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit GLR Fast-blowing fuse ⁷
	GMF Slow-blowing fuse ⁷ NPLT Narrow pallet RRL_ RELOC®-ready luminaire ⁸ LATC Earthquake clip DWAM Anti-Microbial paint 90CRI 90 CRI IP5X Gasketed diffuser compartment to meet IP5X rating ⁹

Accessories: Order as separate catalog number.
DGA14 Drywall grid adapter for 1x4 recessed fixture

nLight® Control Accessories: Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight .			
WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODM	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODM DX	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
		Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CAT5 10FT J1
		30' cable	CAT5 30FT J1
Power Supply			
nLight Power Supply	nPS 80		

Replacement Parts: Order as separate catalog number.		
*237LKE	DBLT48 ADP LENS ASSEMBLY	4 ft. replacement lens (light traps included)
*237LKL	DBLT48 SDP LENS ASSEMBLY	4 ft. replacement lens (light traps included)
*237LL2	DBLT48 ADSM LENS ASSEMBLY	4 ft. replacement lens (light traps included)
*237LLA	DBLT48 SDSM LENS ASSEMBLY	4 ft. replacement lens (light traps included)
*237LT2	DBLT48 ADPT LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237LT4	DBLT48 SDPT LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237LT6	DBLT48 ADSMT LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237LT8	DBLT48 SDSMT LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237LTA	DBLT48 ADPT SENSOR LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237M52	DBLT48 SDPT SENSOR LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237M5A	DBLT48 ADSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens (trims included)
*237M5L	DBLT48 SDSMT SENSOR LENS ASSEMBLY	4 ft. replacement lens (trims included)

Notes

- 1 Approximate lumen output.
- 2 Not available with SLD, EL7L or EL14L battery packs.
- 3 Requires power from nLight network bridge or NPS 80.
- 4 Must specify diffuser with trims rings. See sensor options in ordering information.
- 5 When using pre-wire option, use PWS1846.
- 6 Must specify voltage. Requires BSE labeling. Consult factory for options.
- 7 Must specify voltage, 120 or 277 with GLR & GMF fusing.
- 8 For ordering logic consult: [RRL_2013](#).
- 9 Not available with Occupancy Control sensors.

BLT Tunable White Volumetric Recessed Lighting 1'x4'

Specifications

Length: 47-3/4 (121.2)

Width: 11-3/4 (29.8)

Depth: 3-1/4 (82.6)

All dimensions are inches (centimeters) unless otherwise specified.



Multiple Diffuser Options




ADP
Curved Ribbed



ADSM
Curved Smooth



SDP
Square Ribbed



SDSM
Square Smooth

Tunable White Wall Pods



nPODM 2P DX CCT




nPODM 4S DX EDUTW



nPODM 4S EDUTW

Typical nLight network layout with power supply, sensor and wallpod.

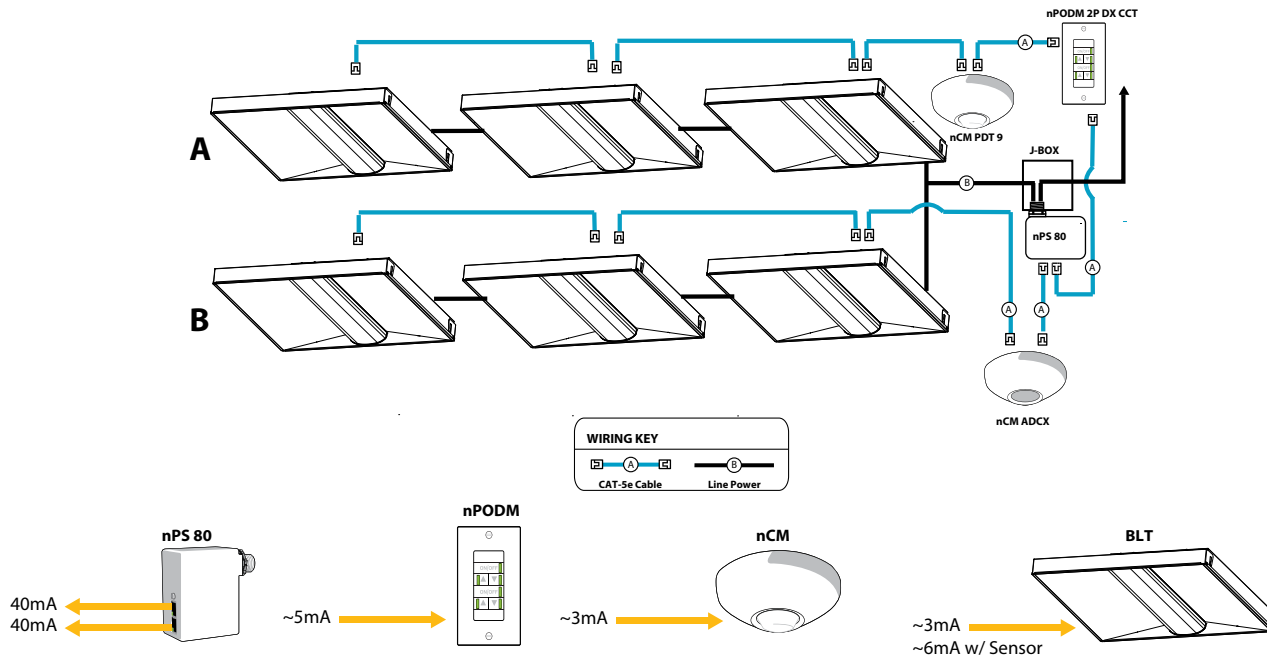

BLT Tunable White Volumetric Recessed Lighting 1'x4'

Sensor Options				
Option	Automatic Dimming Photocell	Occupancy Sensing		nLight Wired Networking
		PIR	PDT	
NES7		X		X
NES7ADCX	X	X		X
NESPDT7			X	X
NESPDT7ADCX	X		X	X


* Requires network to be present for sensors to operate

nLight Wired Networking

The nES 7 is ideal for small rooms without obstructions or areas with primarily walking motion. Ideal areas include hallways, corridors, storage rooms, and breakrooms. Additionally, the NES7ADCX includes an integrated photocell, which enables daylight harvesting controls.

For areas like restrooms, private offices, open offices, conference rooms or any space with obstructions, the nES PDT 7 dual technology sensor is recommended. The nES PDT 7 utilizes both PIR (passive infrared) and Microphonics technologies to detect occupancy. Additionally, the NESPDT7ADCX includes an integrated photocell, which enables daylight harvesting controls which is ideal for areas where windows are present.

Sequence of Operation

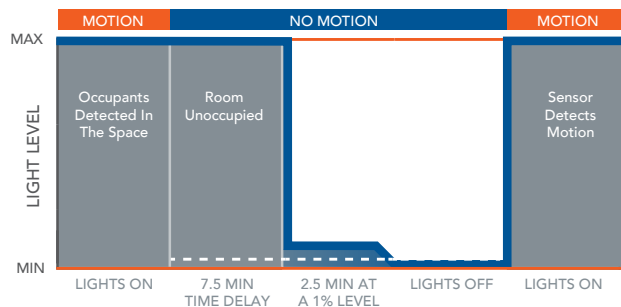


*The presetting on the automatic dimming photocell is 5fc.

Sensor Coverage Pattern Mini 360° Lens

- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor


9 FT Mounting

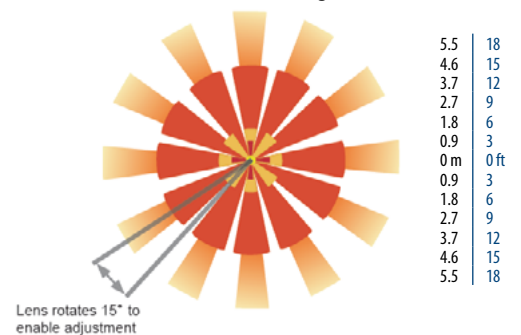


BLT Tunable White Volumetric Recessed Lighting 1'x4'

PHOTOMETRICS


BLT4 TUWH PROR 40L @3000K, 82CRI, 4135 delivered lumens, test no. LTL28918P253, tested in accordance to IESNA LM-79

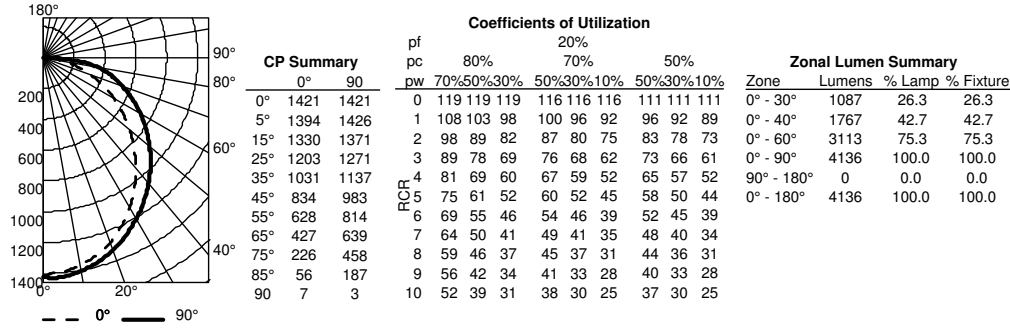

BLT4 TUWH PROR 40L ADP @4000K, 82CRI, 3933 delivered lumens, test no. LTL28918P258, tested in accordance to IESNA LM-79

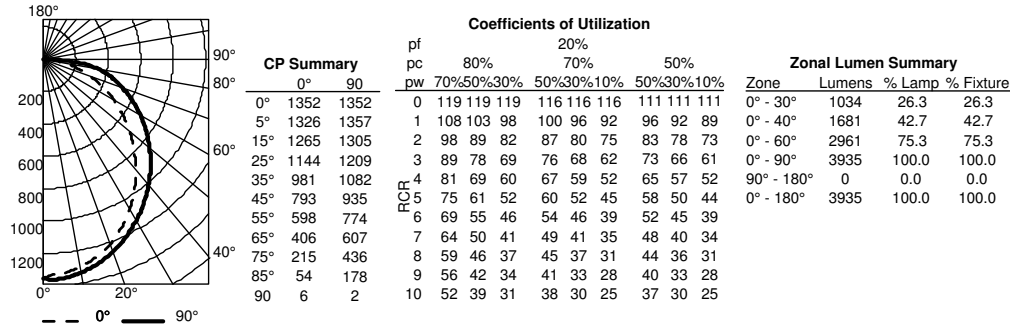


BLT4 TUWH PROR 40L ADP @5000K, 82CRI, 4056 delivered lumens, test no. LTL28918P263, tested in accordance to IESNA LM-79

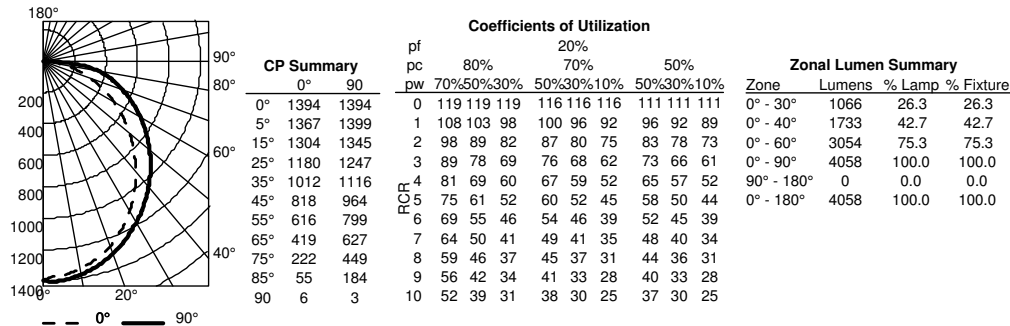

Performance Data			
Lumen Package	Lumens	Input Watts	LPW
20L ADP @3000K, 82CRI	2231	19	117
20L ADP @4000K, 82CRI	2123	15	142
20L ADP @5000K, 82CRI	2189	16	137
30L ADP @3000K, 82CRI	3286	30	110
30L ADP @4000K, 82CRI	3126	24	130
30L ADP @5000K, 82CRI	3224	26	124
40L ADP @3000K, 82CRI	4135	39	106
40L ADP @4000K, 82CRI	3933	31	127
40L ADP @5000K, 82CRI	4056	34	119
48L ADP @3000K, 82CRI	4993	45	111
48L ADP @4000K, 82CRI	4749	36	132
48L ADP @5000K, 82CRI	4898	40	122
60L ADP @3000K, 82CRI	6014	53	113
60L ADP @4000K, 82CRI	5721	42	136
60L ADP @5000K, 82CRI	5900	47	126

MOUNTING DATA	
Ceiling Type	Appropriate Trim Type
Exposed grid tee (1" and 9/16")	G
Concealed grid tee	G
Plaster or plasterboard	G*



*DGA accessory available to provide ceiling trim flange and fixture support for plaster or plasterboard ceiling. Recommended rough-in dimensions for DGA installation is 12-3/4" x 48-3/4" (Tolerance is +1/8", -0").